







solution with HV terminal PORCELAIN type
for kV 10

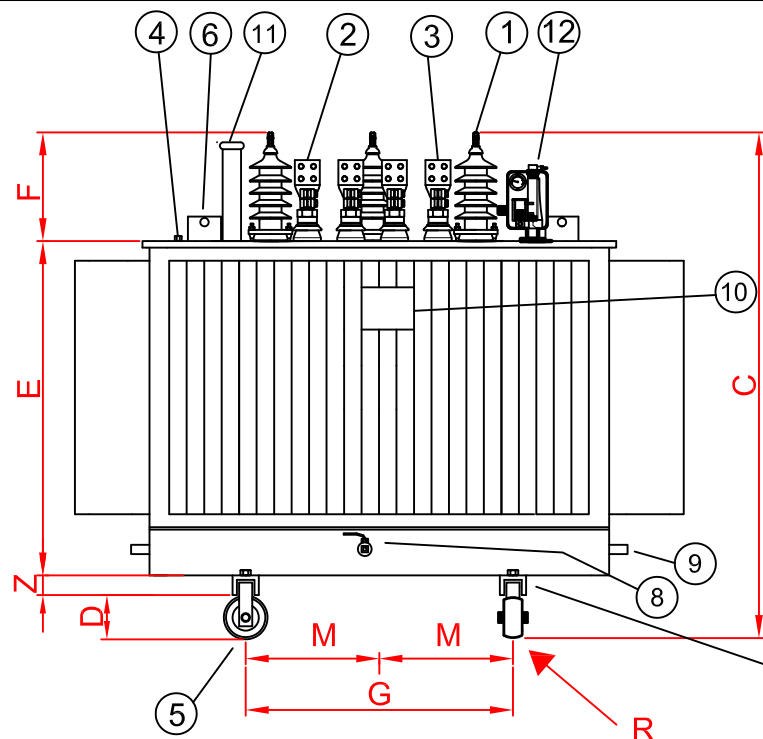


screen terminal



terminal LV and NEUTRAL (1/3150 A)

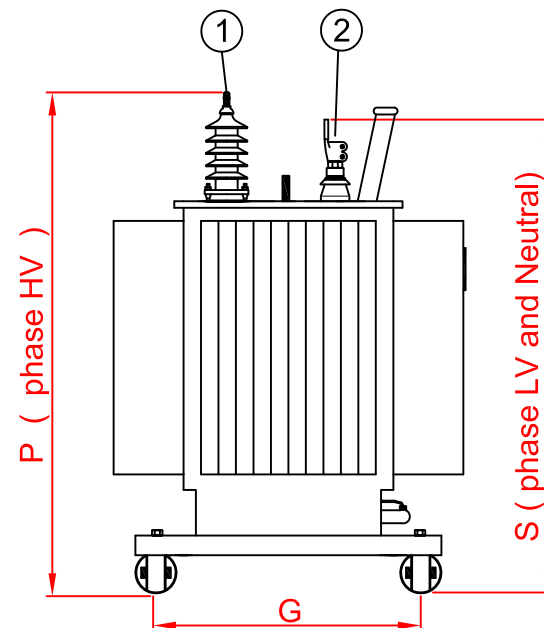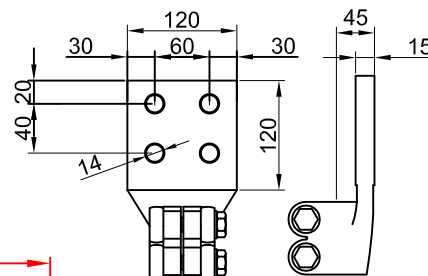

DRAWING NOT IN SCALE
TOLLERENCE DIMENSIONS : 2%

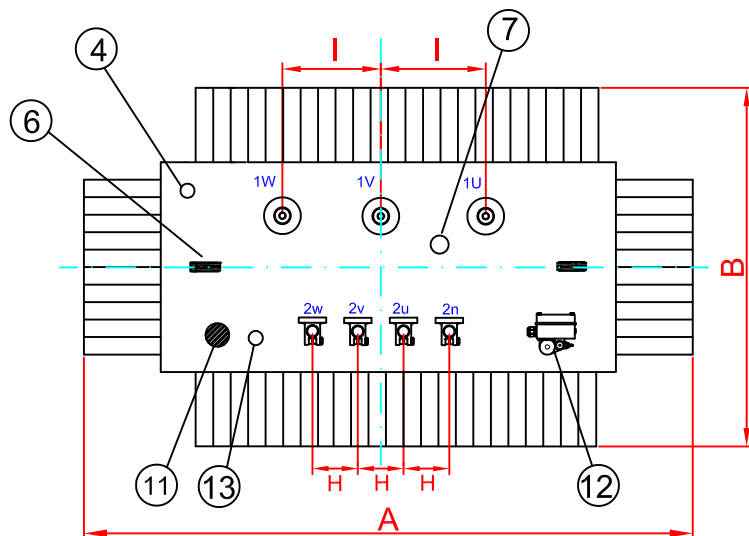

A	1790
B	1090
C	2090
Z	60
D	140
E	1440
F	450
G	820
M	410
H	210
I	300
S	1970
P	2070
R	Ø 160 x 50

NOTE:

Pos.	Description
1	BUSHING HV - porcelain type
2	BUSHING LV - porcelain type
3	BUSHING NEUTRAL - porcelain type
4	THERMOMETER POCKET
5	ROLLERS
6	LIFTING LUGS
7	TAP-CHANGER at 5 steps (+/- 2 x 2,5%)
8	DRAIN VALVE
9	EARTING TERMINAL
10	DATA PLATE
11	BURSTING VALVE
12	DMCR protection device
13	ELECTROSTATIC SCREEN TERMINAL

Rated Power : kVA 1600 aluminum windings execution
Type : ONAN Series : ECO-O
kV primary : 10 +/- 2 x 2,5%
V secondary : 400 + n. (at no load)
Hz 50 Vcc 6% Group: Dyn11
TOTAL WEIGHT : 3800 Kg.
OIL WEIGHT : 920 Kg.
Customer: VECTOR
☒ Ref. offer dt 12/11/19
☒
date : 12/11/2019
PRELIMINARY drawing with indicative dimensions

color RAL 7031