

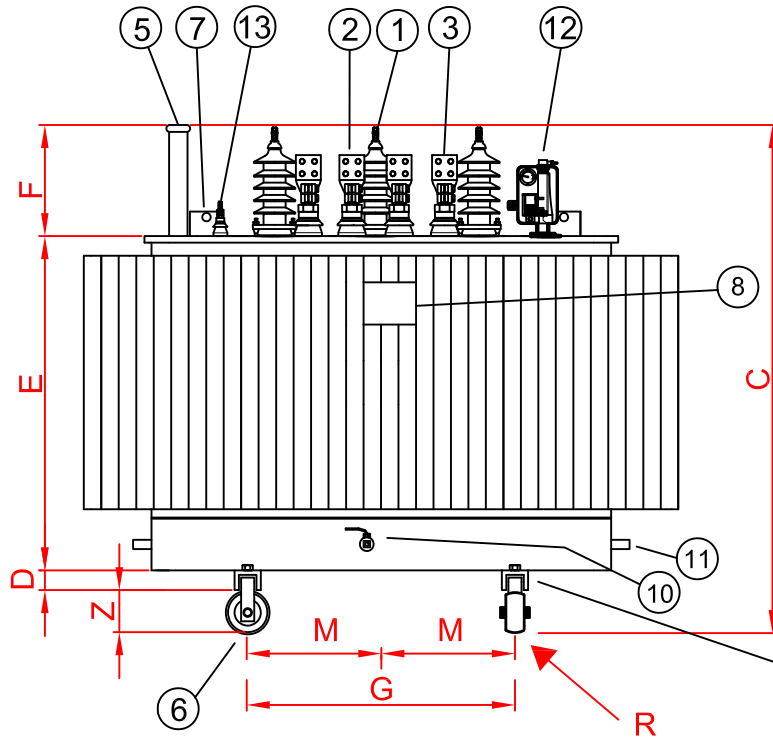
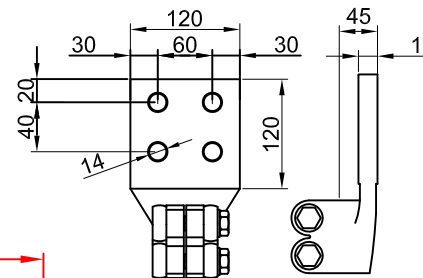


terminal LV and NEUTRAL

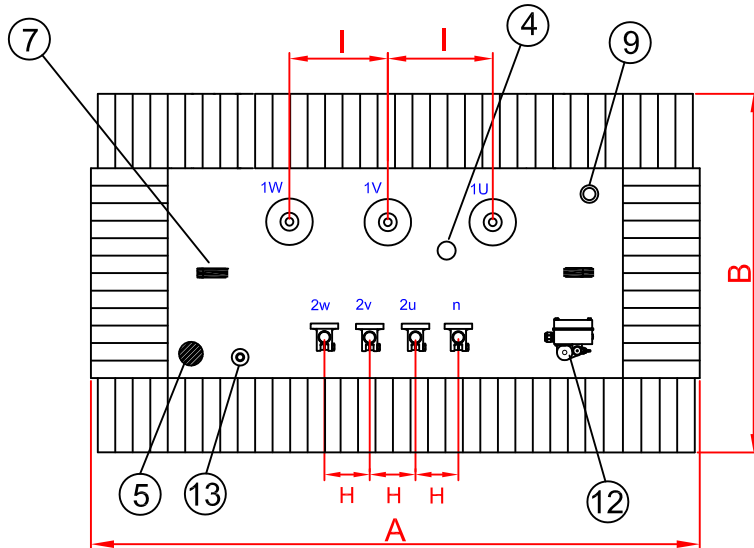

screen terminal (OPTIONAL)

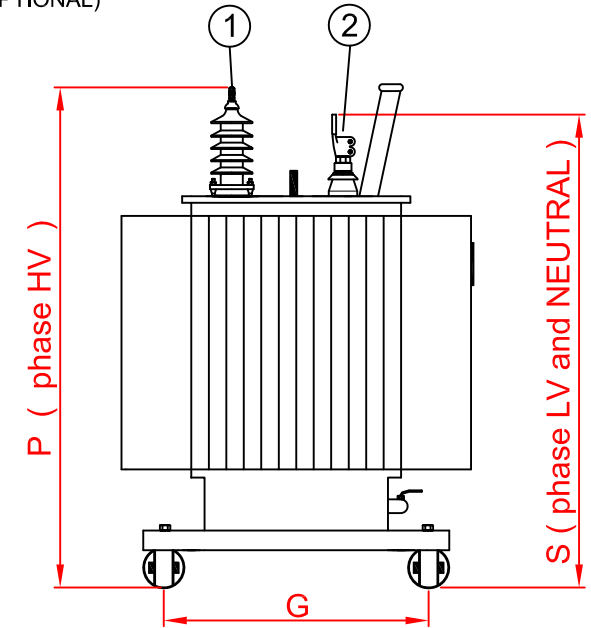

A	1900
B	1170
C	2220
D	65
Z	135
E	1570
F	450
G	820
M	410
H	210
I	300
S	2100
P	2200

R Ø 160 x 50

Pos.	Description
1	BUSHING HV - porcelain type
2	BUSHING LV - porcelain type
3	NEUTRAL BUSHING - porcelain type
4	TAP-CHANGER at 5 steps (+/- 2 x 2,5%)
5	BURSTING VALVE
6	ROLLERS
7	LIFTING LUGS
8	DATA PLATE
9	THERMOMETER POCKET
10	DRAIN VALVE
11	EARTING TERMINAL
12	DMCR protection device (optional)
13	ELECTROSTATIC SCREEN (optional)

NOTE: color RAL 7031

DRAWING NOT IN SCALE
TOLLERANCE DIMENSIONS : 2%

Rated Power : kVA 2000 aluminum windings execution
Type : ONAN Series : ECO-O
kV primary : 10 +/- 2 x 2,5%
V secondary : 400 + n. (at no load)
Hz 50 Vcc 6% Group: Dyn11
TOTAL WEIGHT : 4450 Kg.
OIL WEIGHT : 1100 Kg.
Customer: VECTOR
☒ Ref. request dt 10/06/19
☒
date : 10/06/2019

preliminary drawing with indicative dimensions
GA drawing, the executive will be send after reception P.O.