





DRAWING NOT IN SCALE
TOLLERANCE DIMENSIONS : 2%

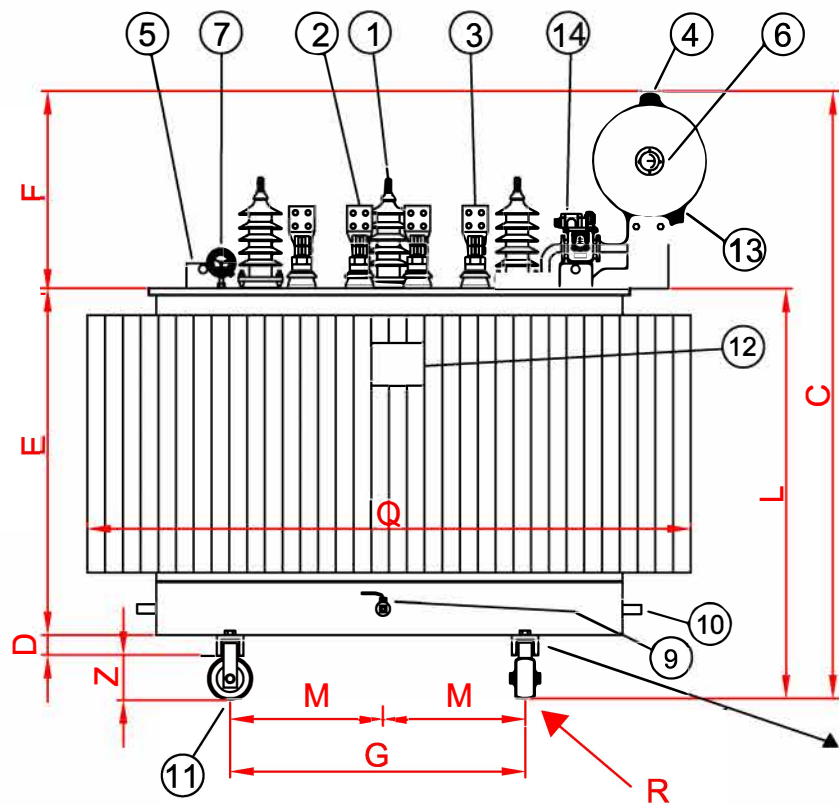

solution with HV terminal PORCELAIN type



terminal LV and NEUTRAL

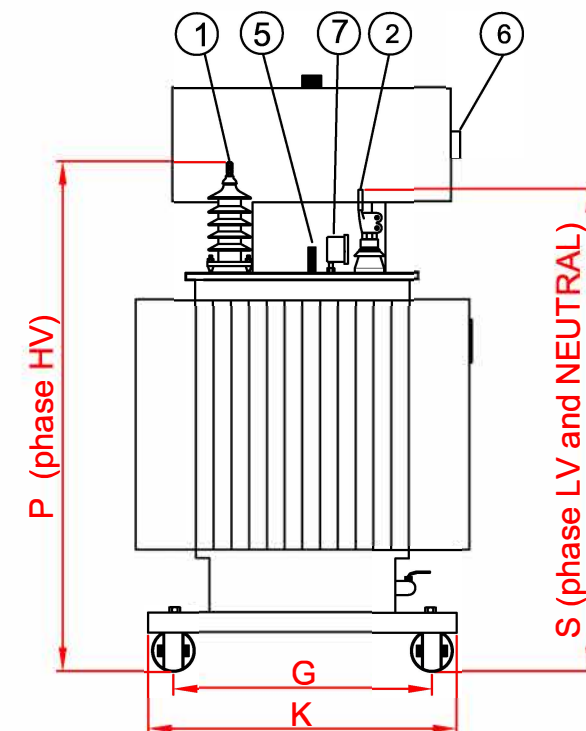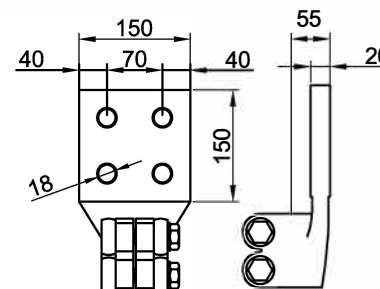

A	2290
B	1360
C	2670
D	70
Z	170
E	1750
F	680
G	1070
M	535
H	230
I	300
S	2390
P	2420
Q	2140
L	1990
K	1300

DESCRIPTION	
1	HV BUSHING porcelain type
2	LV BUSHING porcelain type
3	NEUTRAL BUSHING porcelain type
4	BURSTING VALVE
5	LIFTING LUGS
6	OIL LEVEL (without contact)
7	THERMOMETER (with N.O. contacts)
8	OFF LOAD TAP CHANGER
9	DRAIN VALVE
10	EARTHING TERMINAL
11	ROLLER
12	DATA PLATE
13	SILICAGEL BREATHER
14	BUCHHOLZ RELAY (with N.O. contacts)

Rated Power : kVA 2500 (TIER1)
aluminum windings execution

Type : ONAN Series : ECO

kV primary : 10 +/- 2 x 2,5%

V secondary : 400 + n. (at no load)

Hz 50 Vcc 6% Group: Dyn11

TOTAL WEIGHT : 5500 Kg.

OIL WEIGHT : 1700 Kg.

Customer: VECTOR

NOTE: color RAL 7031

R Ø 200 x 70