



CONNECT AND PROTECT

Flexible Conductors

Solutions to Optimize the Design of Electrical Power & Grounding & Bonding Connections


nvent

ERIFLEX

Table of Contents

Flexible Conductors for Various Applications.....	6
Certificates & nVent ERIFLEX Software.....	8
Product Overview.....	9
nVent ERIFLEX Flexibar Insulated Flexible Busbar.....	10
Accessories.....	22
Flexibar Hydraulic and Manual Work Center.....	26
Flat Insulated Braided Conductor (IBS/IBSB Advanced & IBSHY).....	28
Grounding & Bonding Copper Braids (MBJ, MBJYG & BJ).....	39
Grounding & Bonding Stainless Steel Braids (CPI & CPIW).....	43
Power Shunt (PBC & PPS).....	47
Flat Copper & Stainless Steel Braids in Coils ((FTCB, FRCB, FSSB & FTCBI).....	49
Round and Tubular Copper Braids in Coils (RTCBI, RTCB, RRCB, RRCBI & TTCE).....	50
Make Your Own Braided Connections.....	52
Made to Order Solutions (MTO).....	53
Cross Reference List.....	55

Flexible Conductors for Low-Voltage Industries

INVENT OFFERS

- A strong worldwide expertise in different markets
- A worldwide team of experts in electrical power connections
- Global solutions manufacturing
- Complete range of high-quality, reliable, certified products
- Innovative and compatible product solutions

ENERGY

- Electrical Power Generators and Distribution
 - Transformers
 - Generators
- Renewable Energies
 - Windmills
 - Solar
 - Hydropower
- Oil, Gas and Petrochemical
- Telecom
- Power Stations



BEFORE



TRANSPORTATION

- Marine
- Aircraft
- Ground Transportation
- Automotive





INDUSTRY & BUILDINGS

- Air Conditioning
- Elevators, Escalators & Automatic Doors



PANELBOARD

- Power
- Control & Command Applications:
 - Power Switchboards
 - Distribution Panel
 - UPS
 - Power Factory Correction



MACHINERY

- Tunneling
- Crunchers
- Printing
- Welding
- Packaging
- Woodworking

AFTER




Flexible Conductors for Various Applications


nVent ERIFLEX is well-known for producing high quality flexible conductors for low voltage power connections. Flexible conductors made out of braids or laminates are used in a variety of applications for current transfer or grounding/earthing connections.




Worldwide certifications, applications and product availability

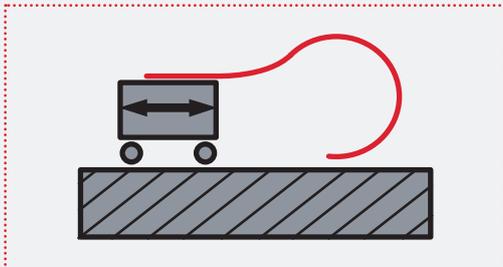


Flexible connection between fixed and moving parts

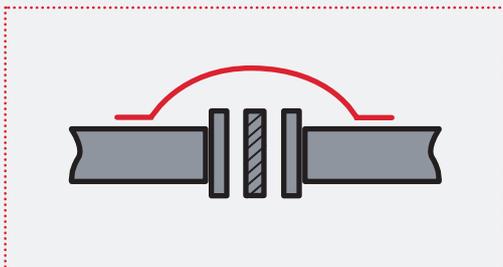


Earthing/grounding interconnection (Example: pipeline)

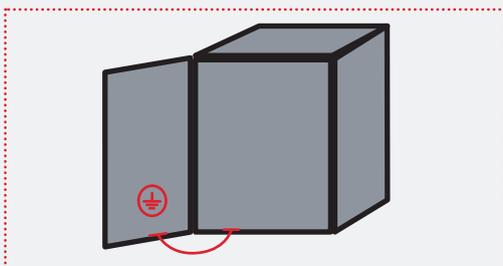


Earthing/grounding connection with excellent electro-magnetic compatibility

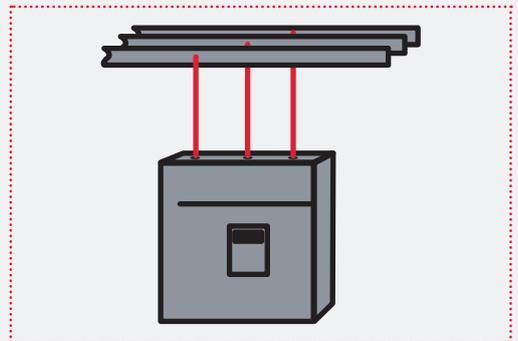


Busbar and active electrical component connection (Example: circuit breaker, contactor) including most compact components on the market

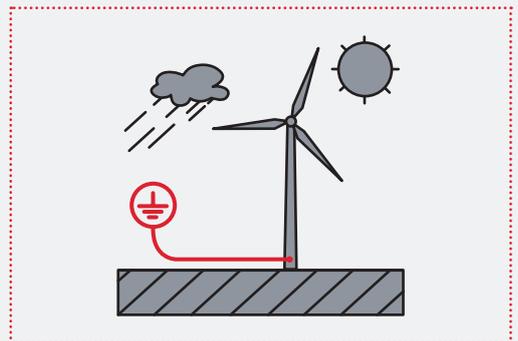


Outdoor/offshore application or difficult environment (Example: abrasion, corrosion, UV...)

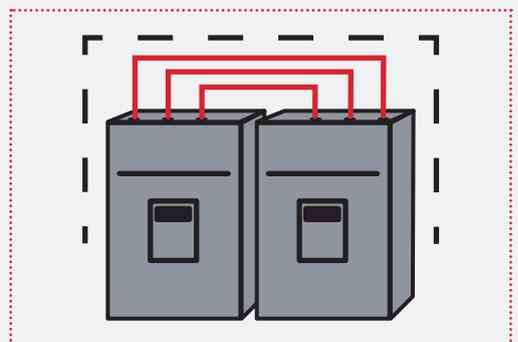


Short and compact connection between electrical components for volume reduction

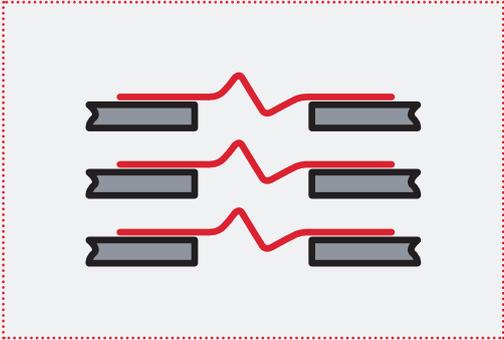


Expansion connections for busbar systems

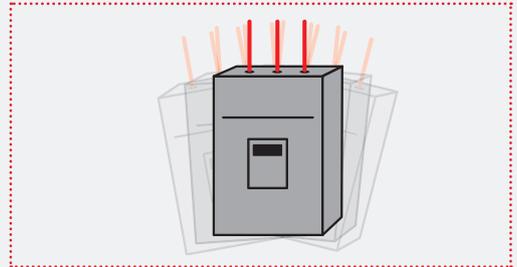


Vibration and reliability solution for connection

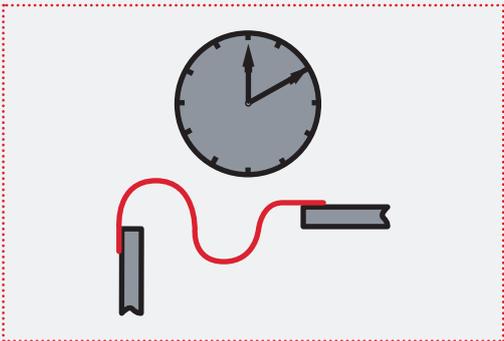

Reduce time assembly or maintenance connection

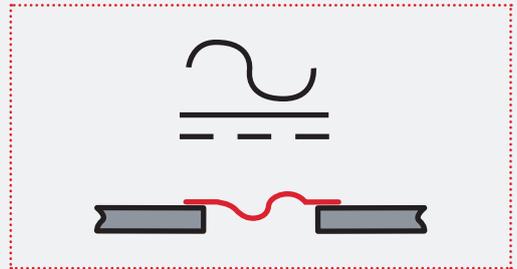


Connection for alternating current or direct current application

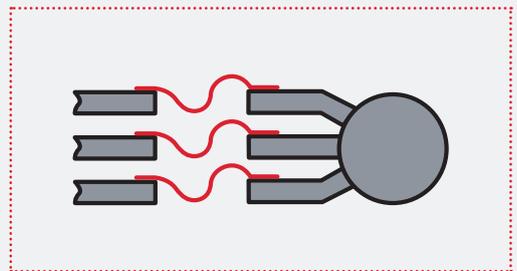

Motor, generator or transformer connection with busbar system



Power connection between horizontal and vertical system

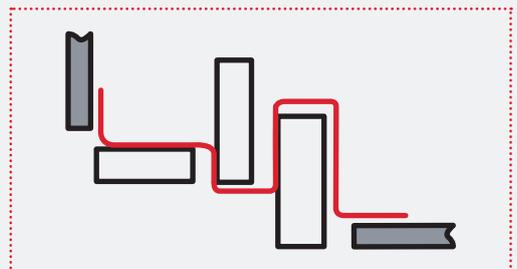


Connection everywhere

Certificates & nVent ERIFLEX Software

TESTS & CERTIFICATES

nVent ERIFLEX components are compliant with several agencies and standards to meet all requirements

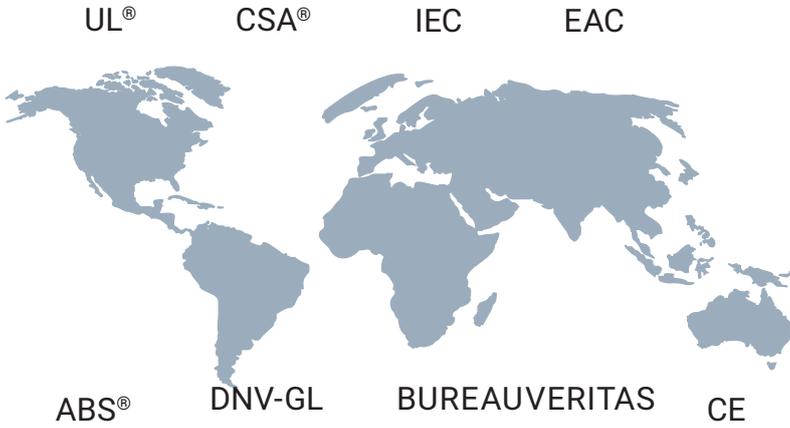

DEDICATED NVENT ERIFLEX SOFTWARE AVAILABLE

nVent has designed an interactive software that allows drawing your technical panel layout with all components and relevant information on them.

The software is developed according to the new IEC 61439-1 standard. Inside, you will discover: updated pricing, products information and project calculator.

Whether you're interested in making a complete low-voltage busbar system, a distribution kit, or if you need to determine a flexible connection with nVent ERIFLEX Flexibar, you can trust nVent ERIFLEX software to help simplify the process.

In fact, the software will provide you with technical and commercial datasheets dedicated to your project.

For more information or to request your personal login information, contact your local nVent representative or visit eriflex-configurator.nvent.com/eriflex

A COMPLETE SOLUTION FOR:

- Optimal design
- Standard compliance
- Cost effective
- Quality environment



<https://eriflex-configurator.nvent.com/eriflex/>



International Electrotechnical Commission
IEC 60439.1 Standard
IEC 61439.1 Standard



Underwriters Laboratories
UL Recognized, File No. E125470
UL Recognized, File No. E220029
UL Recognized, File No. E316390



UL Listed, File No. E220029



Canadian Standards Association
CSA Certified, File No. LL 90005
CSA Certified, file No 700 443 70



European Conformity



ABS American Bureau of Shipping
Certificate No. 08-HS365878-1-PDA-DUP & Certificate No. 13-HS1018106-1-PDA-DUP
Marine & Offshore Applications



Bureau VERITAS
Certificate No. 02859 / DO BV for shipboard use



A dedicated certification for Marine and Off Shore for nVent ERIFLEX IBS/IBSB Advanced



European Union standard fire testing to rail way components



EAC
Certificate compliance for Russia



RoHS Compliant



Halogen free material as per UL and IEC



Flame retardant



Low smoke

Product Overview

Product Range	Typical Uses	Typical Market
nVent ERIFLEX Flexibar: Advanced, Standard, Summum 	<ul style="list-style-type: none"> • Heavy-duty power interconnection • Overcome vibration/alignment problems • Circuit breaker, generator & prefabricated power network conductor • Expansion joints • Variable terminating positions • Machine connections • Movable connection from massive busbar system • Alternative to large & multiple cables • Alternative to rigid busbar 	<ul style="list-style-type: none"> • Switchgear & control equipment • Transport • Electrical equipment manufacturers • Power generation • Machinery manufacturer
Insulated braided conductor (IBS/IBSB Advanced & IBSHY) 	<ul style="list-style-type: none"> • Interconnects for low voltage power distribution units • IBSB specially designed for industrial circuit breaker connection • Overcome vibration/alignment problems • Battery connections • Earth/ground connections 	<ul style="list-style-type: none"> • Switchgear & control equipment • Transport • Electrical equipment manufacturers • Power generation
Power shunt (PBC & PPS) 	<ul style="list-style-type: none"> • Transformer or generator to busbar connection • Overcome vibration/alignment problems • Power interconnection 	<ul style="list-style-type: none"> • Switchgear & control equipment • Power distribution • Transportation
Earth/ground copper braids (MBJ, MBJYG & BJ) 	<ul style="list-style-type: none"> • Power, earthing/grounding and equipotential connections • Electrical bonding enclosure door • EMI effect reduction application 	<ul style="list-style-type: none"> • Switchgear & control equipment • Rail transportation • Electrical equipment manufacturers • Power generation (wind, solar) • Data center
Earth/ground stainless steel braids (CPI & CPIW) 	<ul style="list-style-type: none"> • Earthing/grounding and equipotential connections • Superior abrasion, corrosion, chemical, and UV resistance for outdoor applications • Expansion joints • Connections for lightning protection systems 	<ul style="list-style-type: none"> • Transportation • Food and beverage industry • Power generation (wind, solar) • Chemical and oil industry • Automotive • Defense & aerospace • Civil construction • Urban projects
Flat and round copper braids in coils 	<ul style="list-style-type: none"> • Earth/ground connections • Power interconnection • Lightning protection • Flexible links • Overcome vibration/alignment problems 	<ul style="list-style-type: none"> • Defense & aerospace • Rail transportation • Automotive • Electronics • General electrical sector • Civil construction
Tubular copper braids in coils 	<ul style="list-style-type: none"> • Screening of cables from electromagnetic, electrostatic and RF interference • Mechanical support • Protection against abrasion and corrosion • EMC & EMH applications 	<ul style="list-style-type: none"> • Defense & aerospace • Transportation • Electronics & communication • Cable harness & assembly makers • Component distributors

Insulated Flexible Busbar (Flexibar)

A COMPLETE RANGE FLEXIBLE BUSBAR

• Patent insulation on nVent ERIFLEX Flexibar:

- Advanced
- Standard
- Summum



THE REFERENCE CONDUCTOR

- Flexibar is composed by with multiple layers of thin electrolytic copper, available in plain (Standard and Summum) or tin plated (Advanced & Standard)
- Flexibar connections are made by punching directly through the laminates. There are no lugs to purchase, which eliminates faulty connection problems and makes installation easier and faster
- The insulation is a high-resistance, self-extinguishing TPE (Flexibar Advanced), Silicone (Flexibar Summum) or PVC (Flexibar Standard) compound
- Traceability code and designation Part Number on product
- Easily formed, Flexibar improves assembly flexibility and aesthetics of panels
- Optimal alternative to large cable & rigid busbar
- Quality: 100% production dielectric tested
- Full range from 24 mm² up to 1200 mm²

ENHANCED FLEXIBILITY

nVent's exclusive manufacturing process offers superior flexibility:

- Copper laminates are free to slide within the insulation
- High insulation quality
- Wide variety of bending, twisting & folding possibilities

FEATURES


- Self-extinguishable/flame retardant
- High mechanical resistance
- High elongation value
- High current withstanding
- High copper quality (99.9% purity)
- High conductivity

INNOVATIVE PATENT INSULATION

Flexibar has added grooves on the inner surface of the insulation sleeve to improve sliding between the central conductor and the insulation material. The grooves help to reduce the contact surface between the central conductor and the insulation material. This results enhances the flexibility of the flexible busbar.

Result: <20% of the inner surface is in contact with the central conductor.

This nVent ERIFLEX patent idea makes Flexibar more flexible than ever and allows users to optimize the design of their electrical power connection.

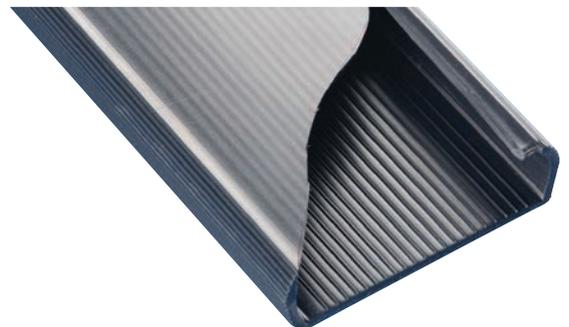

* This patent is applicable for the cross section indication by "*" on the part number.

CONNECTION TYPES

- Between main power and distribution equipment (contactors, circuit-breakers...)
- Between transformer and busduct
- Between busduct and electrical cabinet

SPACE/WEIGHT SAVINGS

- Less installation space compared to cable
- Reduces the length, number of conductors and weight
- Insulation allows for closer spacing than traditional busbar designs

COST SAVINGS

- Eliminates cost and installation of lugs
- Reduces inventory costs

IMPROVES RELIABILITY




- Flexibar is directly connected thus eliminating the cable lug connection
- Excellent resistance to vibration
- No crimping

AESTHETICS

- Optimal flexibility for an easy access




EASY INSTALLATION

- Thanks to its design all Flexibar can be easily bent and shaped for all sizes



SKIN EFFECT ON A.C. APPLICATION

Comparison to the penetration depth between:

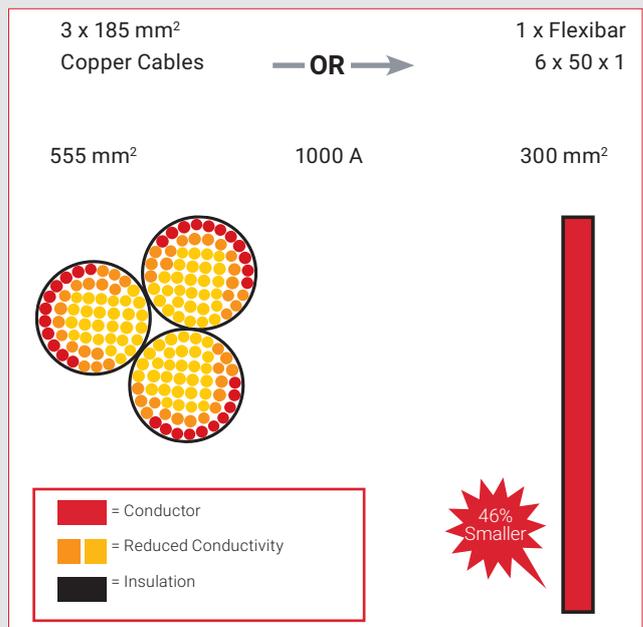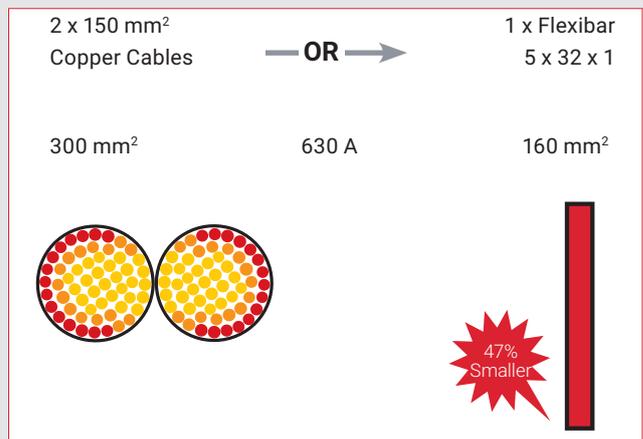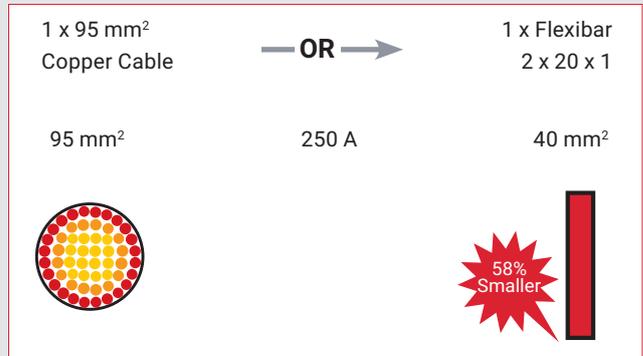

Representative to scale.
 Flexibar intensity and cable intensity are based on conductor temperature rise of 50°C.

Flexibar Advanced

UNIQUE - SAFER - FLEXIBLE



FLEXIBAR ADVANCED

UNIQUE – SAFER – FLEXIBLE

- Conductor is electrolytic **tinned** copper (Cu-ETP)
- Insulation is a high-resistance TEP **Low Smoke, Halogen Free and Flame Retardant (LSHFFR)**, compound:
 - Typical elongation: 500%
 - Working temperature: -50°C to 115°C
 - Typical thickness: 1.8 mm
 - Self-extinguishing:
UL 94-V0 and IEC 60695-2-11 (Glow Wire Test 960 °C)
 - Dielectric strength: 20kV/mm
 - Nominal voltage: 1000 V AC/1500 V DC (IEC - UL - CSA)
 - Dielectric strength: 20kV/mm

Flexibar Advanced has a unique insulation on the market that combine **low smoke, halogen-free and flame retardant** features that improve both the reliability of your electrical installation and safety for equipment and people.

WHY IS FLEXIBAR ADVANCED A SAFER INSULATION?

Low smoke features:

- Generates less corrosive smoke as per IEC 61034-2, ISO 5659-2 and UL 2885.
- Improves visibility for people to be able to easily locate the emergency exit and also allows rescue workers to better assess an emergency situation.

The halogen-free feature enables:

- Reduction in the quantity of toxic smoke
- Minimum of toxicity with no halogens (according to UL 2885, IEC 60754-1 and IEC 62821-1)
- Use in enclosed spaces for specific applications such as submarines, switchboards, and other enclosed environments that require a low emissions solution

The flame retardant portion of the test illustrates the self-extinguish feature:

- Compliant with the UL 94-V0 and Glow wire test @ 960°C (IEC 60695-2) testing standard.
- Reduces the risk of the spread of fire
- Less damage to your electrical installation



FLEXIBAR ADVANCED TINNED COPPER TECHNICAL CHARACTERISTICS




A	Part Number	N	A mm	B mm	Section mm ²	ΔT (K)						Current Coefficient	
						70	60	50	40	30	20		
125 A	534001	3	x 9	x 0,8	21,6	158	147	134	120	104	85	1,72	2,25
	534000	8	x 6	x 0,5	24	196	182	166	143	128	105	1,72	2,25
	534004	3	x 13	x 0,5	19,5	198	184	167	150	130	106	1,72	2,25
	534006	2	x 15,5	x 0,8	24,8	252	234	212	191	165	134	1,72	2,25
	534002	6	x 9	x 0,8	43,2	290	269	245	220	190	155	1,72	2,25
250 A	534005	6	x 13	x 0,5	39	300	277	253	226	196	160	1,72	2,25
	534003	9	x 9	x 0,8	64,8	314	291	265	237	206	168	1,72	2,25
	534010	2	x 20	x 1	40	326	300	275	246	214	174	1,72	2,25
	534007	4	x 15,5	x 0,8	49,6	380	350	320	286	248	202	1,72	2,25
	534011	3	x 20	x 1	60	428	395	360	323	280	228	1,72	2,25
	534016	2	x 24	x 1	48	450	416	380	340	295	240	1,72	2,25
400 A	534008	6	x 15,5	x 0,8	74,4	476	440	402	360	318	254	1,72	2,25
	534012	4	x 20	x 1	80	476	440	402	360	312	254	1,72	2,25
	534023	2	x 32	x 1	64	480	445	406	363	315	257	1,72	2,25
	534017	3	x 24	x 1	72	490	453	413	370	320	261	1,72	2,25
	534013	5	x 20	x 1	100	498	460	420	376	326	266	1,72	2,25
	534009	10	x 15,5	x 0,8	124	538	498	455	407	352	288	1,72	2,25
	534030	2	x 40	x 1	80	538	500	455	406	352	288	1,72	2,25
	534014	6	x 20	x 1	120	546	506	462	413	358	292	1,72	2,25
	534018	4	x 24	x 1	96	550	510	465	416	360	294	1,72	2,25
	534024	3	x 32	x 1	96	570	525	480	430	372	304	1,72	2,25
500 A	534019	5	x 24	x 1	120	608	563	514	460	398	325	1,72	2,25
	534031	3	x 40	x 1	120	617	570	522	466	405	330	1,72	2,25
	534025	4	x 32	x 1	128	648	600	548	490	425	347	1,72	2,25
	534020	6	x 24	x 1	144	670	620	566	506	438	358	1,72	2,25
	534037	3	x 50	x 1	150	700	650	592	530	460	374	1,72	2,25
	534032	4	x 40	x 1	160	727	673	615	550	476	389	1,72	2,25
630 A	534026	5	x 32	x 1	160	758	702	640	573	496	405	1,72	2,25
	534015	10	x 20	x 1	200	762	706	645	576	500	408	1,72	2,25
	534021	8	x 24	x 1	192	802	743	678	606	525	429	1,72	2,25
	534027	6	x 32	x 1	192	846	783	715	640	555	452	1,72	2,25
	534038	4	x 50	x 1	200	860	795	727	650	563	460	1,72	2,25
	534033	5	x 40	x 1	200	900	832	760	680	590	481	1,72	2,25
800 A	534022	10	x 24	x 1	240	948	877	800	716	592	506	1,72	2,25
	534044	4	x 63	x 1	252	1010	935	855	763	661	541	1,65	2,12
	534028	8	x 32	x 1	256	1018	943	860	770	667	544	1,72	2,25
	534034	6	x 40	x 1	240	1018	943	860	770	667	544	1,72	2,25
	534039	5	x 50	x 1	250	1100	1016	930	830	718	588	1,72	2,25
1000 A	534049	4	x 80	x 1	320	1200	1110	1015	906	785	642	1,65	2,12
	534045	5	x 63	x 1	315	1220	1125	1030	920	797	651	1,65	2,12
	534040	6	x 50	x 1	300	1225	1135	1035	925	802	655	1,72	2,25
	534029	10	x 32	x 1	320	1230	1140	1040	930	805	658	1,72	2,25
	534035	8	x 40	x 1	320	1230	1140	1040	930	805	658	1,72	2,25
	534041	8	x 50	x 1	400	1393	1290	1175	1050	912	743	1,72	2,25
	534050	5	x 80	x 1	400	1390	1285	1175	1050	910	743	1,65	2,12
	534036	10	x 40	x 1	400	1400	1295	1181	1055	915	747	1,72	2,25
	534046	6	x 63	x 1	378	1437	1330	1215	1085	941	768	1,65	2,12
	534051	6	x 80	x 1	480	1627	1505	1375	1230	1065	870	1,65	2,12
1250 A	534055	5	x 100	x 1	500	1635	1515	1385	1235	1070	876	1,6	2,02
	534042	10	x 50	x 1	500	1650	1525	1395	1245	1080	882	1,72	2,25
	534047	8	x 63	x 1	504	1650	1525	1395	1245	1080	882	1,65	2,12
	534056	6	x 100	x 1	600	1843	1705	1550	1393	1205	980	1,6	2,02
	534048	10	x 63	x 1	630	1895	1755	1600	1435	1240	1012	1,65	2,12
1600 A	534052	8	x 80	x 1	640	1895	1755	1600	1430	1240	1012	1,65	2,12
	534053	10	x 80	x 1	800	2100	1945	1775	1585	1375	1123	1,65	2,12
	534057	8	x 100	x 1	800	2147	1990	1815	1625	1405	1148	1,6	2,02
	534058	10	x 100	x 1	1000	2350	2170	1985	1775	1535	1255	1,6	2,02
	534059	12	x 100	x 1	1200	2500	2315	2115	1890	1636	1338	1,6	2,02
	534060	10	x 120	x 1	1200	2755	2550	2330	2070	1792	1474	1,49	1,95

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

Flexibar Advanced

UNIQUE - SAFER - FLEXIBLE

Selection of Flexibar Advanced according to the internal temperature of the panel

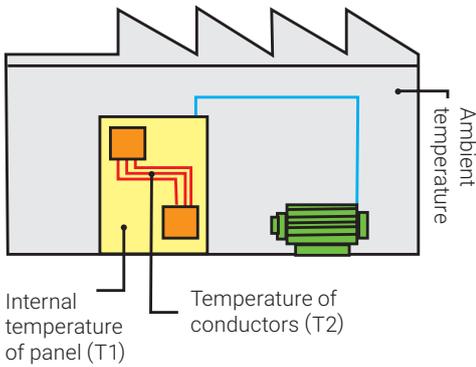

TEMPERATURE RISE OF CONDUCTOR = $T_2 - T_1 = \Delta T$ (K)

Ex: For a current of 630A, with: $T_1 = 40^\circ\text{C}$ and $T_2 = 90^\circ\text{C}$

- 1) $\Delta T = 90 - 40 = 50\text{K}$
- 2) In the 50°K column, find the closest current value to 630A.
Flexibar Advanced 5x32x1 - 552650 - 160 mm² - 640A.
- 3) Select Flexibar Advanced according to the terminal width of the equipment being connected.

K = Kelvin degree (temperature calculated, but not measurable)

FLEXIBAR ADVANCED IN PARALLEL

When using 2 or 3 Flexibar Advanced on edge in parallel for the same phase, use the coefficient:

Ex: 5 x 32 x 1 : $\Delta T^\circ = 50\text{K}$: 640 A

2 bars in parallel : 640 A x 1,72 = 1100 A

3 bars in parallel : 640 A x 2,25 = 1440 A

CERTIFICATION & APPROVALS

- International Commission Electrotechnique (IEC) - Meets all requirements of IEC 61439.1
- UL 67 Recognized component in the "Panelboard and Switchboard accessories – component category (UL file E125470) for US
- UL 758 Recognized component in the "Appliance wiring material - component" category style 11681
- CSA 90005
- CE Conformity
- RoHS compliant
- Class II Conductors (IEC 61439-1, Chapter 8.4.4 - Protection by total insulation)
- Low Smoke IEC 61034-2, ISO 5659-2 and UL 2885
- Halogen-free UL 2885, IEC 60754-1 and IEC 62821-1
- Flame retardant UL94-V0
- Glow wire test @ 960°C (IEC 60695-2)
- UV rating according to UL 2556 and UL 854
- EN 45545 obtaining an HL2 classification for chapters R22 and R23
- Bureau Veritas Marine and Offshore Division - for the Classification of Steel Ships and according IEC 60092 (Electrical installations on ships)
- American Bureau of Shipping (ABS) - Marine & Offshore Applications



Flexibar Advanced Part Numbers

2 METERS TINNED COPPER

Part Number	Global Part Number	Flexibar Description		 Kg
534000	FADV2MTC8X6	Flexibar Advanced 2 m Tinned Copper 8X6X0,5	4	0,35
534001	FADV2MTC3X9	Flexibar Advanced 2 m Tinned Copper 3X9X0,8	4	0,43
534002	FADV2MTC6X9	Flexibar Advanced 2 m Tinned Copper 6X9X0,8	4	0,81
534003	FADV2MTC9X9	Flexibar Advanced 2 m Tinned Copper 9X9X0,8	4	1,19
534004	FADV2MTC3X13	Flexibar Advanced 2 m Tinned Copper 3X13X0,5	4	0,45
534005	FADV2MTC6X13	Flexibar Advanced 2 m Tinned Copper 6X13X0,5	4	0,79
534006	FADV2MTC2X15-5	Flexibar Advanced 2 m Tinned Copper 2X15,5X0,8	4	0,51
534007	FADV2MTC4X15-5	Flexibar Advanced 2 m Tinned Copper 4X15,5X0,8	4	1,02
534008	FADV2MTC6X15-5	Flexibar Advanced 2 m Tinned Copper 6X15,5X0,8	4	1,50
534009	FADV2MTC10X15-5	Flexibar Advanced 2 m Tinned Copper 10X15,5X0,8	4	2,20
534010	FADV2MTC2X20X1	Flexibar Advanced 2 m Tinned Copper 2X20X1	3	1,05
534011	FADV2MTC3X20X1	Flexibar Advanced 2 m Tinned Copper 3X20X1	3	1,42
534012	FADV2MTC4X20X1	Flexibar Advanced 2 m Tinned Copper 4X20X1	3	1,78
534013*	FADV2MTC5X20X1	Flexibar Advanced 2 m Tinned Copper 5X20X1	3	2,15
534014*	FADV2MTC6X20X1	Flexibar Advanced 2 m Tinned Copper 6X20X1	3	2,41
534015*	FADV2MTC10X20X1	Flexibar Advanced 2 m Tinned Copper 10X20X1	3	3,99
534016	FADV2MTC2X24X1	Flexibar Advanced 2 m Tinned Copper 2X24X1	3	1,24
534017	FADV2MTC3X24X1	Flexibar Advanced 2 m Tinned Copper 3X24X1	3	1,68
534018	FADV2MTC4X24X1	Flexibar Advanced 2 m Tinned Copper 4X24X1	3	2,12
534019*	FADV2MTC5X24X1	Flexibar Advanced 2 m Tinned Copper 5X24X1	3	2,55
534020*	FADV2MTC6X24X1	Flexibar Advanced 2 m Tinned Copper 6X24X1	3	2,99
534021*	FADV2MTC8X24X1	Flexibar Advanced 2 m Tinned Copper 8X24X1	3	3,87
534022*	FADV2MTC10X24X1	Flexibar Advanced 2 m Tinned Copper 10X24X1	3	4,75
534023	FADV2MTC2X32X1	Flexibar Advanced 2 m Tinned Copper 2X32X1	2	1,62
534024	FADV2MTC3X32X1	Flexibar Advanced 2 m Tinned Copper 3X32X1	2	2,20
534025	FADV2MTC4X32X1	Flexibar Advanced 2 m Tinned Copper 4X32X1	2	2,78
534026*	FADV2MTC5X32X1	Flexibar Advanced 2 m Tinned Copper 5X32X1	2	3,36
534027*	FADV2MTC6X32X1	Flexibar Advanced 2 m Tinned Copper 6X32X1	2	3,94
534028*	FADV2MTC8X32X1	Flexibar Advanced 2 m Tinned Copper 8X32X1	2	5,10
534029*	FADV2MTC10X32X1	Flexibar Advanced 2 m Tinned Copper 10X32X1	2	6,27
534030	FADV2MTC2X40X1	Flexibar Advanced 2 m Tinned Copper 2X40X1	2	1,99
534031	FADV2MTC3X40X1	Flexibar Advanced 2 m Tinned Copper 3X40X1	2	2,72
534032	FADV2MTC4X40X1	Flexibar Advanced 2 m Tinned Copper 4X40X1	2	3,44
534033*	FADV2MTC5X40X1	Flexibar Advanced 2 m Tinned Copper 5X40X1	2	4,16
534034*	FADV2MTC6X40X1	Flexibar Advanced 2 m Tinned Copper 6X40X1	2	4,89
534035*	FADV2MTC8X40X1	Flexibar Advanced 2 m Tinned Copper 8X40X1	2	6,33
534036*	FADV2MTC10X40X1	Flexibar Advanced 2 m Tinned Copper 10X40X1	2	7,78
534037	FADV2MTC3X50X1	Flexibar Advanced 2 m Tinned Copper 3X50X1	1	3,37
534038*	FADV2MTC4X50X1	Flexibar Advanced 2 m Tinned Copper 4X50X1	1	4,27
534039*	FADV2MTC5X50X1	Flexibar Advanced 2 m Tinned Copper 5X50X1	1	5,17
534040*	FADV2MTC6X50X1	Flexibar Advanced 2 m Tinned Copper 6X50X1	1	6,07
534041*	FADV2MTC8X50X1	Flexibar Advanced 2 m Tinned Copper 8X50X1	1	7,87
534042*	FADV2MTC10X50X1	Flexibar Advanced 2 m Tinned Copper 10X50X1	1	9,68
534044*	FADV2MTC4X63X1	Flexibar Advanced 2 m Tinned Copper 4X63X1	1	5,34
534045*	FADV2MTC5X63X1	Flexibar Advanced 2 m Tinned Copper 5X63X1	1	6,48
534046*	FADV2MTC6X63X1	Flexibar Advanced 2 m Tinned Copper 6X63X1	1	7,61
534047*	FADV2MTC8X63X1	Flexibar Advanced 2 m Tinned Copper 8X63X1	1	9,88
534048*	FADV2MTC10X63X1	Flexibar Advanced 2 m Tinned Copper 10X63X1	1	12,14
534049*	FADV2MTC4X80X1	Flexibar Advanced 2 m Tinned Copper 4X80X1	1	6,75
534050*	FADV2MTC5X80X1	Flexibar Advanced 2 m Tinned Copper 5X80X1	1	8,19
534051*	FADV2MTC6X80X1	Flexibar Advanced 2 m Tinned Copper 6X80X1	1	9,62
534052*	FADV2MTC8X80X1	Flexibar Advanced 2 m Tinned Copper 8X80X1	1	12,49
534053*	FADV2MTC10X80X1	Flexibar Advanced 2 m Tinned Copper 10X80X1	1	15,37
534055*	FADV2MTC5X100X1	Flexibar Advanced 2 m Tinned Copper 5X100X1	1	10,20
534056*	FADV2MTC6X100X1	Flexibar Advanced 2 m Tinned Copper 6X100X1	1	11,99
534057*	FADV2MTC8X100X1	Flexibar Advanced 2 m Tinned Copper 8X100X1	1	15,57
534058*	FADV2MTC10X100	Flexibar Advanced 2 m Tinned Copper 10X100X1	1	19,16
534059*	FADV2MTC12X100	Flexibar Advanced 2 m Tinned Copper 12X100X1	1	22,74
534060*	FADV2MTC10X120	Flexibar Advanced 2 m Tinned Copper 10X120X1	1	22,90


All **Flexibar Advanced** cross sections can be bent, folded or twisted with a small bending radius for shorter and more compact power connections, from 125A up to 4500A applications.

Check out our **nVent ERIFLEX Flexibar Technical Handbook.**



*nVent ERIFLEX Patent insulation


Flexibar Standard

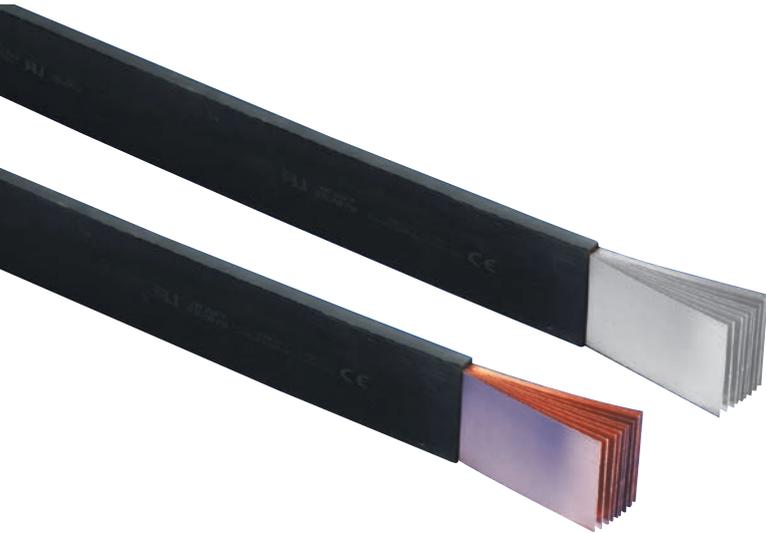

FLEXIBAR STANDARD

- Conductor is electrolytic copper (Cu-ETP)
- Insulation is a high-resistance vinyl compound:
 - Elongation: 370%
 - Operating temperature: -50°C -105°C
 - Thickness: 2 mm ± 0.2
 - Self-extinguishing: UL 94-V0 and IEC 60695-2-11 (Glow Wire Test 960 °C)
 - Dielectric strength: 20kV/mm
 - Nominal voltage = 1000 V AC/1500 V DC (UL & IEC)

Selection of Flexibar according to the internal temperature of the panel

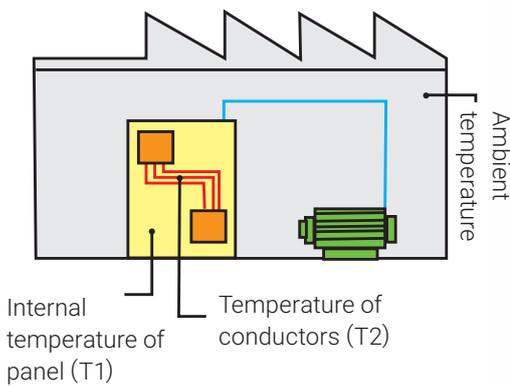

TEMPERATURE RISE OF CONDUCTOR = $T2 - T1 = \Delta T$ (K)

Ex: For a current of 630A, with: $T1 = 40^{\circ}\text{C}$ and $T2 = 90^{\circ}\text{C}$

- 1) $\Delta T = 90 - 40 = 50\text{K}$
 - 2) In the 50°K column, find the closest current value to 630A.
Flexibar 5x32x1 - 552650 -
160 mm² - 640A.
 - 3) Select Flexibar according to the terminal width of the equipment being connected.
- K = Kelvin degree (temperature calculated, but not measurable)

FLEXIBAR IN PARALLEL

When using 2 or 3 Flexibar on edge in parallel for the same phase, use the coefficient:

Ex: 5 x 32 x 1 : $\Delta T^{\circ} = 50\text{K}$: 640 A

2 bars in parallel : 640 A x 1,72 = 1100 A

3 bars in parallel : 640 A x 2,25 = 1440 A

FLEXIBAR STANDARD TECHNICAL CHARACTERISTICS



A	Part Number	N	A mm	B mm	Section mm ²	ΔT (K)						Current Coefficient	
						70	60	50	40	30	20		
125 A	552400	8	x 6	x 0,5	24	196	182	166	143	128	105	1,72	2,25
	552410	3	x 9	x 0,8	21,6	158	147	134	120	104	85	1,72	2,25
	552420	6	x 9	x 0,8	43,2	290	269	245	220	190	155	1,72	2,25
	552440	3	x 13	x 0,5	19,5	198	184	167	150	130	106	1,72	2,25
	552390	2	x 15,5	x 0,8	24,8	252	234	212	191	165	134	1,72	2,25
250 A	552430	9	x 9	x 0,8	64,8	314	291	265	237	206	168	1,72	2,25
	552450	6	x 13	x 0,5	39	300	277	253	226	196	160	1,72	2,25
	552460	4	x 15,5	x 0,8	49,6	380	350	320	286	248	202	1,72	2,25
	552490	2	x 20	x 1	40	326	300	275	246	214	174	1,72	2,25
	552500	3	x 20	x 1	60	428	395	360	323	280	228	1,72	2,25
	552550	2	x 24	x 1	48	450	416	380	340	295	240	1,72	2,25
400 A	552470	6	x 15,5	x 0,8	74,4	476	440	402	360	318	254	1,72	2,25
	552480	10	x 15,5	x 0,8	124	538	498	455	407	352	288	1,72	2,25
	552510	4	x 20	x 1	80	476	440	402	360	312	254	1,72	2,25
	552520	5	x 20	x 1	100	498	460	420	376	326	266	1,72	2,25
	552530	6	x 20	x 1	120	546	506	462	413	358	292	1,72	2,25
	552560	3	x 24	x 1	72	490	453	413	370	320	261	1,72	2,25
	552570	4	x 24	x 1	96	550	510	465	416	360	294	1,72	2,25
	552620	2	x 32	x 1	64	480	445	406	363	315	257	1,72	2,25
	552630	3	x 32	x 1	96	570	525	480	430	372	304	1,72	2,25
	552690	2	x 40	x 1	80	538	500	455	406	352	288	1,72	2,25
500 A	552580	5	x 24	x 1	120	608	563	514	460	398	325	1,72	2,25
	552590	6	x 24	x 1	144	670	620	566	506	438	358	1,72	2,25
	552640	4	x 32	x 1	128	648	600	548	490	425	347	1,72	2,25
	552700	3	x 40	x 1	120	617	570	522	466	405	330	1,72	2,25
	552710	4	x 40	x 1	160	727	673	615	550	476	389	1,72	2,25
	552760	3	x 50	x 1	150	700	650	592	530	460	374	1,72	2,25
630 A	552540	10	x 20	x 1	200	762	706	645	576	500	408	1,72	2,25
	552600	8	x 24	x 1	192	802	743	678	606	525	429	1,72	2,25
	552650	5	x 32	x 1	160	758	702	640	573	496	405	1,72	2,25
	552660	6	x 32	x 1	192	846	783	715	640	555	452	1,72	2,25
	552720	5	x 40	x 1	200	900	832	760	680	590	481	1,72	2,25
	552770	4	x 50	x 1	200	860	795	727	650	563	460	1,72	2,25
800 A	552610	10	x 24	x 1	240	948	877	800	716	592	506	1,72	2,25
	552670	8	x 32	x 1	256	1018	943	860	770	667	544	1,72	2,25
	552730	6	x 40	x 1	240	1018	943	860	770	667	544	1,72	2,25
	552780	5	x 50	x 1	250	1100	1016	930	830	718	588	1,72	2,25
	552830	4	x 63	x 1	252	1010	935	855	763	661	541	1,65	2,12
1000 A	552680	10	x 32	x 1	320	1230	1140	1040	930	805	658	1,72	2,25
	552740	8	x 40	x 1	320	1230	1140	1040	930	805	658	1,72	2,25
	552750	10	x 40	x 1	400	1400	1295	1181	1055	915	747	1,72	2,25
	552790	6	x 50	x 1	300	1225	1135	1035	925	802	655	1,72	2,25
	552800	8	x 50	x 1	400	1393	1290	1175	1050	912	743	1,72	2,25
	552840	5	x 63	x 1	315	1220	1125	1030	920	797	651	1,65	2,12
	552850	6	x 63	x 1	378	1437	1330	1215	1085	941	768	1,65	2,12
	552890	4	x 80	x 1	320	1200	1110	1015	906	785	642	1,65	2,12
	552900	5	x 80	x 1	400	1390	1285	1175	1050	910	743	1,65	2,12
1250 A	552810	10	x 50	x 1	500	1650	1525	1395	1245	1080	882	1,72	2,25
	552860	8	x 63	x 1	504	1650	1525	1395	1245	1080	882	1,65	2,12
	552910	6	x 80	x 1	480	1627	1505	1375	1230	1065	870	1,65	2,12
	552950	5	x 100	x 1	500	1635	1515	1385	1235	1070	876	1,6	2,02
	552960	6	x 100	x 1	600	1843	1705	1550	1393	1205	980	1,6	2,02
1600 A	552870	10	x 63	x 1	630	1895	1755	1600	1435	1240	1012	1,65	2,12
	552920	8	x 80	x 1	640	1895	1755	1600	1430	1240	1012	1,65	2,12
	552930	10	x 80	x 1	800	2100	1945	1775	1585	1375	1123	1,65	2,12
	552970	8	x 100	x 1	800	2147	1990	1815	1625	1405	1148	1,6	2,02
	552980	10	x 100	x 1	1000	2350	2170	1985	1775	1535	1255	1,6	2,02
	552990	12	x 100	x 1	1200	2500	2315	2115	1890	1636	1338	1,6	2,02
	538650	10	x 120	x 1	1200	2755	2550	2330	2070	1792	1474	1,49	1,95

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

Flexibar Standard

CERTIFICATION & APPROVALS

- International Commission Electrotechnique (IEC) - Meets all requirements of IEC 60439.1 & IEC 61439.1
- UL 67 Recognized component in the "Panelboard and Switchboard accessories - component" category (UL file E125470) for US and Canadian territory
- UL 758 Recognized component in the "Appliance wiring material - component" category style 10531 (UL file E316390) and category style 11343 (UL file E316390)
- Bureau Veritas Certified - No. 02859/DOBV. Ship application
- Canadian Standards Association - CSA certified as appliance wiring material for a maximum of 1000 volts. File N° 090005 (CAN/CSA - C22.2)
- American Bureau of Shipping (ABS) - Certificate No. 08-HS365878-1-PDA-DUP - Marine & Offshore Applications
- CE Conformity
- EAC compliant
- RoHS compliant
- Class II Conductors (IEC 61439-1, Chapter 8.4.4 - Protection by total insulation)



Flexibar Standard Part Numbers



2 METERS RED COPPER

Part Number	Flexibar Description		 Kg
552400	2M 8 x 6 x 0,5	10	0,35
552410	2M 3 x 9 x 0,8	10	0,43
552420	2M 6 x 9 x 0,8	10	0,81
552430	2M 9 x 9 x 0,8	10	1,19
552440	2M 3 x 13 x 0,5	10	0,45
552450	2M 6 x 13 x 0,5	10	0,79
552390	2M 2 x 15,5 x 0,8	10	0,51
552460	2M 4 x 15,5 x 0,8	10	1,02
552470	2M 6 x 15,5 x 0,8	10	1,50
552480	2M 10 x 15,5 x 0,8	10	2,20
552490	2M 2 x 20 x 1	5	1,05
552500	2M 3 x 20 x 1	5	1,42
552510	2M 4 x 20 x 1	5	1,78
552520*	2M 5 x 20 x 1	5	2,15
552530*	2M 6 x 20 x 1	5	2,41
552540*	2M 10 x 20 x 1	5	3,99
552550	2M 2 x 24 x 1	5	1,24
552560	2M 3 x 24 x 1	5	1,68
552570	2M 4 x 24 x 1	5	2,12
552580*	2M 5 x 24 x 1	5	2,55
552590*	2M 6 x 24 x 1	5	2,99
552600*	2M 8 x 24 x 1	5	3,87
552610*	2M 10 x 24 x 1	5	4,75
552620	2M 2 x 32 x 1	5	1,62
552630	2M 3 x 32 x 1	5	2,20
552640	2M 4 x 32 x 1	5	2,78
552650*	2M 5 x 32 x 1	5	3,36
552660*	2M 6 x 32 x 1	5	3,94
552670*	2M 8 x 32 x 1	5	5,10
552680*	2M 10 x 32 x 1	5	6,27
552690	2M 2 x 40 x 1	5	1,99
552700	2M 3 x 40 x 1	5	2,72
552710	2M 4 x 40 x 1	5	3,44
552720*	2M 5 x 40 x 1	5	4,16
552730*	2M 6 x 40 x 1	5	4,89
552740*	2M 8 x 40 x 1	5	6,33
552750*	2M 10 x 40 x 1	5	7,78
552760	2M 3 x 50 x 1	5	3,37
552770*	2M 4 x 50 x 1	5	4,27
552780*	2M 5 x 50 x 1	5	5,17
552790*	2M 6 x 50 x 1	2	6,07
552800*	2M 8 x 50 x 1	2	7,87
552810*	2M 10 x 50 x 1	2	9,68
552830*	2M 4 x 63 x 1	2	5,34
552840*	2M 5 x 63 x 1	2	6,48
552850*	2M 6 x 63 x 1	2	7,61
552860*	2M 8 x 63 x 1	2	9,88
552870*	2M 10 x 63 x 1	2	12,14
552890*	2M 4 x 80 x 1	2	6,75
552900*	2M 5 x 80 x 1	2	8,19
552910*	2M 6 x 80 x 1	2	9,62
552920*	2M 8 x 80 x 1	2	12,49
552930*	2M 10 x 80 x 1	2	15,37
552950*	2M 5 x 100 x 1	2	10,20
552960*	2M 6 x 100 x 1	2	11,99
552970*	2M 8 x 100 x 1	2	15,57
552980*	2M 10 x 100 x 1	2	19,16
552990*	2M 12 x 100 x 1	2	22,74
538650*	2M 10 x 120 x 1	1	22,90

* nVent ERIFLEX patent insulation

All Flexibar cross sections can be bent, folded or twisted with a small bending radius for shorter and more compact power connections, from 125A up to 4500A applications.


3 METERS RED COPPER

Part Number	Flexibar Description		 Kg
541060	3M 4 x 15,5 x 0,8	5	1,53
541090	3M 2 x 20 x 1	5	1,58
541100	3M 3 x 20 x 1	5	2,13
541110	3M 4 x 20 x 1	5	2,67
541150	3M 2 x 24 x 1	5	1,86
541160	3M 3 x 24 x 1	5	2,52
541170	3M 4 x 24 x 1	5	3,18
541180*	3M 5 x 24 x 1	5	3,83
541230	3M 3 x 32 x 1	2	3,30
541240	3M 4 x 32 x 1	2	4,17
541250*	3M 5 x 32 x 1	2	5,04
541260*	3M 6 x 32 x 1	2	5,91
541270*	3M 8 x 32 x 1	2	7,65
541320*	3M 5 x 40 x 1	2	6,24
541380*	3M 5 x 50 x 1	2	7,76

* nVent ERIFLEX patent insulation



Flexibar Summum

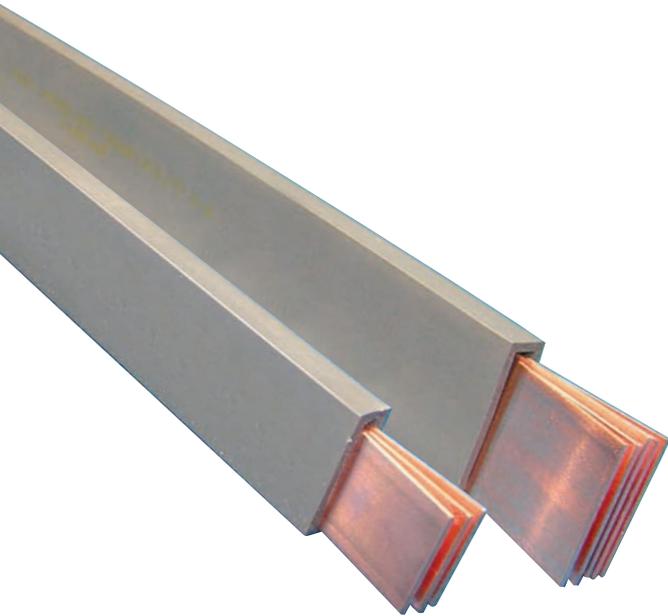

FLEXIBAR SUMMUM

HALOGEN FREE - HIGH TEMPERATURE


- Halogen-free
- High current density
- High ambient temperature
- High flexibility
- High insulation value


FLEXIBAR SUMMUM

- Conductor in electrolytic copper
 - Laminates thickness 1 mm
- Insulation in silicone compound
 - Working temperature: -50°C up to 280°C (315°C short time)
 - Low smoke
 - Very high UV & ozone withstanding
 - Self-extinguishing: UL94-V0
 - Elongation: 400% minimum
 - Tear resistance: 20 KN/m minimum
 - Thickness: 2 mm ± 0.2 mm
 - Dielectric strength: 20 KV/mm
 - Maximum continuous voltage: 1000 V AC/ 1500 V DC
 - American Bureau of Shipping (ABS) - Certificate No. 08-HS365878-1-PDA-DUP - Marine & Offshore Applications
 - IEC 61439.1.
 - EN 45545 obtaining an HL3 classification for chapters R22 and R23



On request: Tinned Flexibar Summum

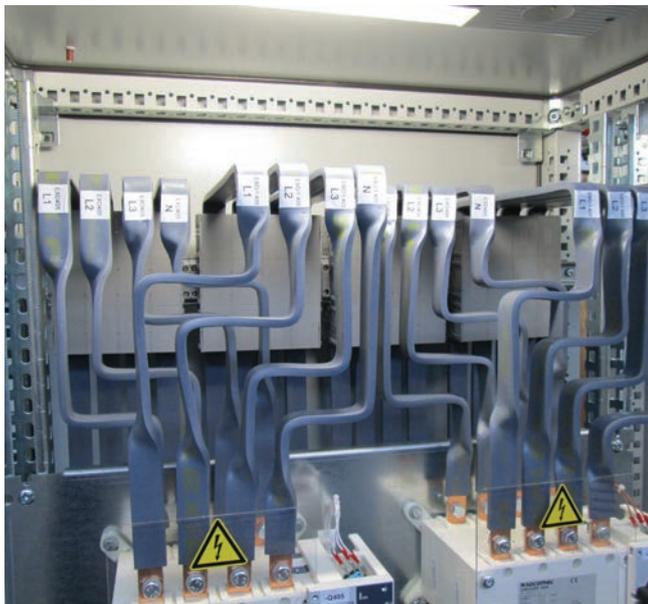

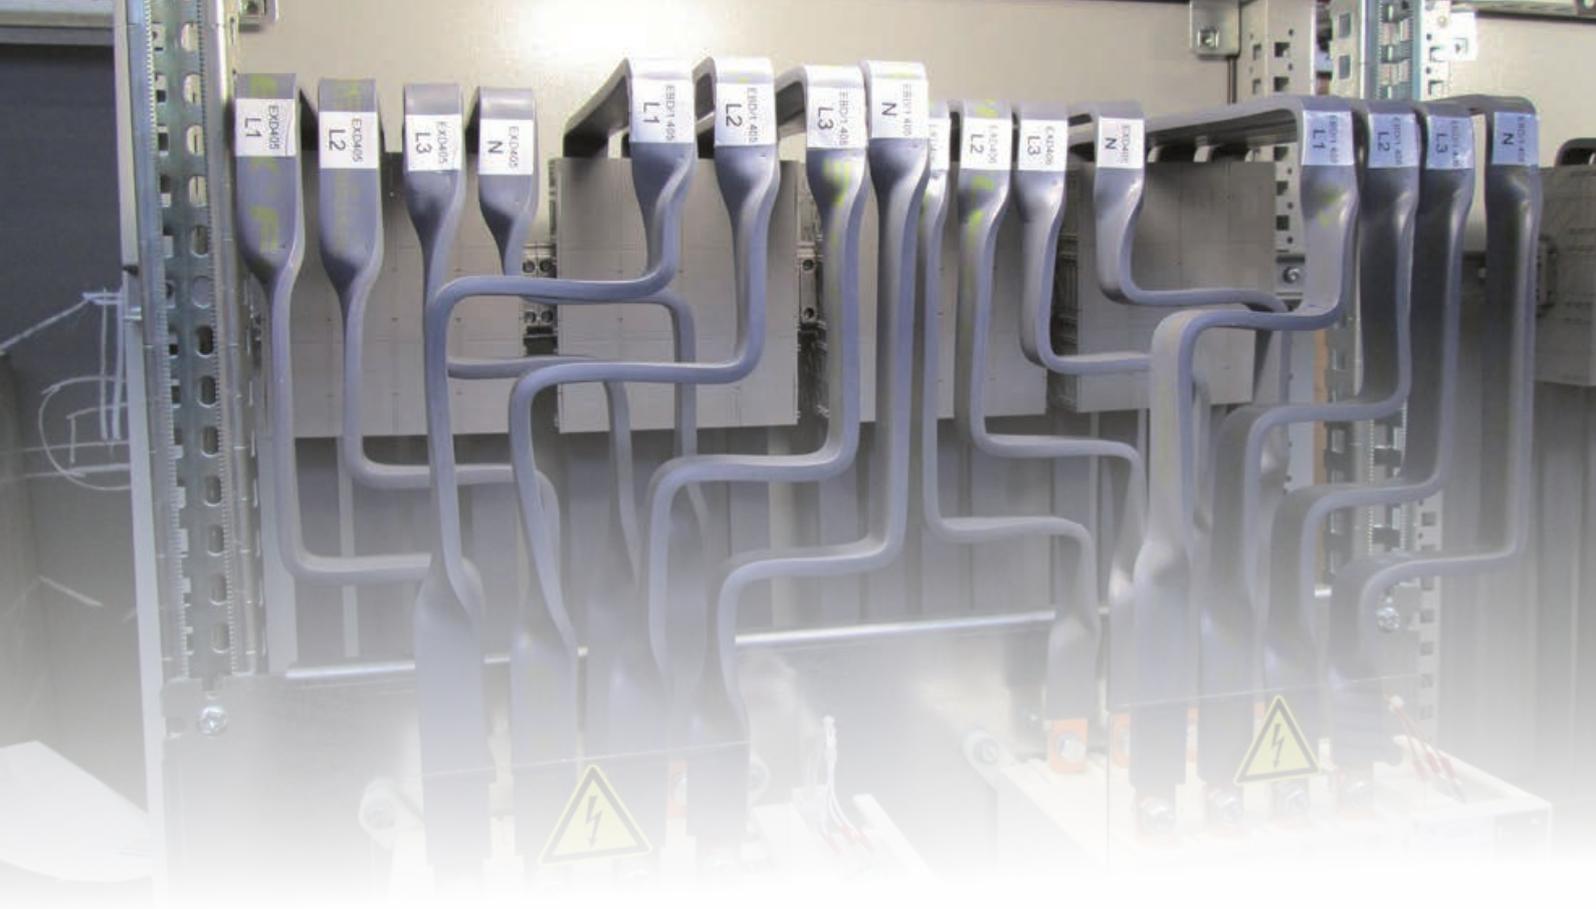

2 METER RED COPPER

Part Number	Flexibar Description		 Kg	Section mm ²	IEC® Ampacity ΔT (°k)					Current Coefficient	
					70	60	50	40	30		
566490	Flexibar Summum 2 M 2 x 20 x 1	5	1,05	40	326	300	275	246	214	1,72	2,25
566500	Flexibar Summum 2 M 3 x 20 x 1	5	1,42	60	428	395	360	323	280	1,72	2,25
566510	Flexibar Summum 2 M 4 x 20 x 1	5	1,78	80	476	440	402	360	312	1,72	2,25
566520	Flexibar Summum 2 M 5 x 20 x 1	5	2,15	100	498	460	420	376	326	1,72	2,25
566550	Flexibar Summum 2 M 2 x 24 x 1	5	1,24	48	450	416	380	340	295	1,72	2,25
566560	Flexibar Summum 2 M 3 x 24 x 1	5	1,68	72	490	453	413	370	320	1,72	2,25
566570	Flexibar Summum 2 M 4 x 24 x 1	5	2,12	96	550	540	465	416	360	1,72	2,25
566580	Flexibar Summum 2 M 5 x 24 x 1	5	2,55	120	608	563	514	460	398	1,72	2,25
566590	Flexibar Summum 2 M 6 x 24 x 1	5	2,99	144	670	620	566	506	438	1,72	2,25
566630	Flexibar Summum 2 M 3 x 32 x 1	5	2,2	96	570	525	480	430	372	1,72	2,25
566640	Flexibar Summum 2 M 4 x 32 x 1	5	2,78	128	648	600	548	490	425	1,72	2,25
566650	Flexibar Summum 2 M 5 x 32 x 1	5	3,36	160	758	702	640	573	496	1,72	2,25
566660	Flexibar Summum 2 M 6 x 32 x 1	5	3,94	192	846	783	715	640	555	1,72	2,25
566670	Flexibar Summum 2 M 8 x 32 x 1	5	5,1	256	1018	943	860	770	667	1,72	2,25
566720	Flexibar Summum 2 M 5 x 40 x 1	5	4,16	200	900	832	760	680	590	1,72	2,25
566730	Flexibar Summum 2 M 6 x 40 x 1	5	4,89	240	1018	943	860	770	667	1,72	2,25
566750	Flexibar Summum 2 M 10 x 40 x 1	5	7,78	400	1400	1295	1181	1055	915	1,72	2,25
566780	Flexibar Summum 2 M 5 x 50 x 1	5	5,17	250	1100	1016	930	830	718	1,72	2,25
566800	Flexibar Summum 2 M 8 x 50 x 1	2	7,87	400	1393	1290	1175	1050	912	1,72	2,25
566810	Flexibar Summum 2 M 10 x 50 x 1	2	9,68	500	1650	1525	1395	1245	1080	1,72	2,25

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

Product not available in all location - On demand.

Some photographs in the Flexibar Summum section may actually be using Flexibar

Accessories



FLEXIBAR STANDARD KITS


- Application: connections between busbar and fixed switchgear
- Kit is comprised of Flexibar Standard preformed and punched at the 2 extremities & end covers
- Only 1 kit for 3 configurations
- Intensity range: from 250A to 630A




END COVER 20, 24 & 32

- End Cover 20: Accessory for nVent ERIFLEX Flexibar 20 mm, Kit 250T and TN, IBS Adv 25, IBS Adv 50, IBSB Adv 50 and IBSB Adv 70.
- End Cover 24: Accessory for nVent ERIFLEX Flexibar 24 mm and IBSB Adv 100
- End Cover 32: Accessory for nVent ERIFLEX Flexibar 32 mm, Kit 630A T and TN, IBSB Adv 120, 185 and 240.
- Transparent cover Visual inspection
- Halogen-free
- Self-extinguishing: UL 94 V-0
- RoHS compliant
- Easy-fitting after bolting
- IEC 61439-1

FLEXIBAR STANDARD KIT 250A

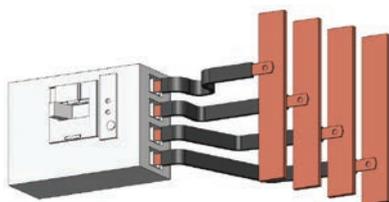


3 Phases | 3 Phases + Neutral
 Kit 250A T | Kit 250A TN

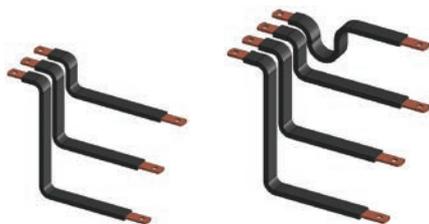


Part No.	Description	Box	kg/lbs
541800	Kit 250A T	1	0,76/1.68
541805	Kit 250A TN	1	0,98/2.16
534800	Kit 250A T Advanced	1	0,76/1.68
534805	Kit 250A TN Advanced	1	0,98/2.16

FLEXIBAR STANDARD KIT 630A

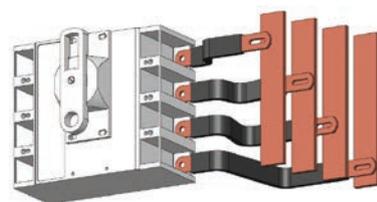

3 Phases | 3 Phases + Neutral
 Kit 630A T | Kit 630A TN

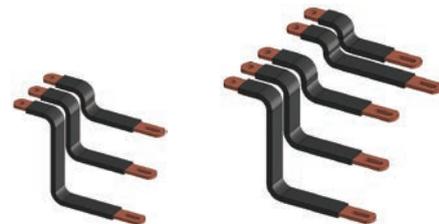

Part No.	Description	Box	kg/lbs
541810	Kit 630A T	1	2,10/4.63
541815	Kit 630A TN	1	3,10/6.83
534810	Kit 630A T Advanced	1	2,10/4.63
534815	Kit 630A TN Advanced	1	3,10/6.83




Part No.	Description	Box	kg/lbs
541774	End Cover 20	12	0,19/0.42
541775	End Cover 24	12	0,22/0.48
541776	End Cover 32	12	0,26/0.57

Accessories



SPACER CLAMPS

- Easy to install
- Fixes and maintains the weight of Flexibar range
- Facilitates cooling

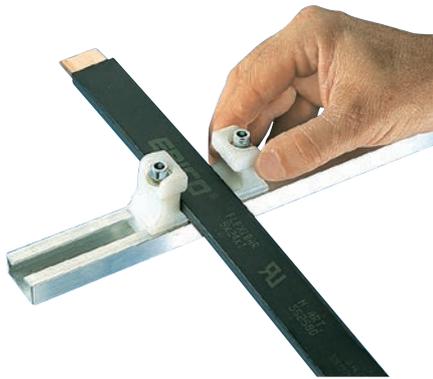


UFS KIT SUPPORT

Assembly comprised of a 2 m aluminum section and 24 retaining blocks made of glass-reinforced halogen-free polyamide.

- Possible to make up 3 supports, 650 mm long each for 4 Flexibar range
- Recommended distance between clamps: 400 mm max for Flexibar and 630 mm Max for IBS/IBSB Advanced.


FS SPACER CLAMP

- Ensures correct support for Flexibar range and IBSB Advanced in parallel, without damage to the insulation.
- Maintains correct space for optimum cooling.
- 4 Flexibar range in parallel maximum
- UL 67
- Recommended distance between clamps: 400 mm for Flexibar and 630 mm Max for IBS/IBSB Advanced.

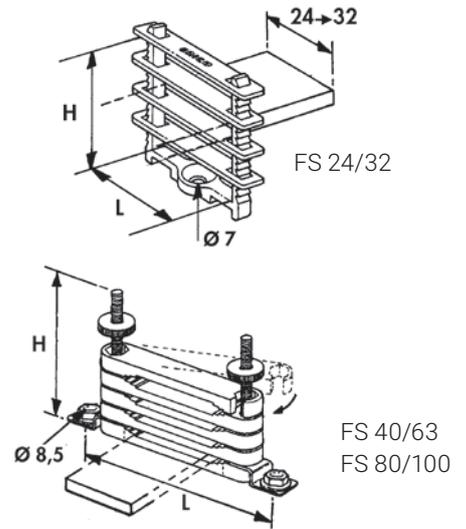

Part No.	Description	Type*	H mm	L mm		Kg
553550	FS 24	=< 24 mm	53	30	25	0,015
553560	FS 32	=< 32 mm	53	38	25	0,018
553570	FS 40-63	40-50 & 63 mm	95	150	10	0,100
553580	FS 80-100	80/100 mm	140	200	10	0,250


* Type of Flexibar and IBS/IBSB Advanced

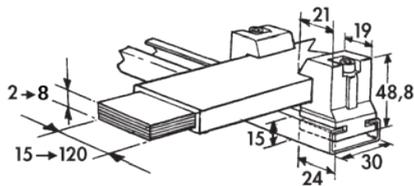

Part No.	Description		Kg
553590	UFS Kit	1	2,3


RFS REINFORCED SUPPORT

- Allows up to 8 Flexibar range in parallel.
- Easy mounting in the panel. (25 mm pitch)
- Recommended distance between clamps: 400 mm



Part No.	Description	A mm	B mm	C mm	D mm	TS	Flexibar H mm		Kg
553370	RFS 40-63	150	175	90	120	M8	40=>63	1	0,932
553380	RFS 80-100	200	225	140	170	M10	80=>100	1	1,430

Accessories

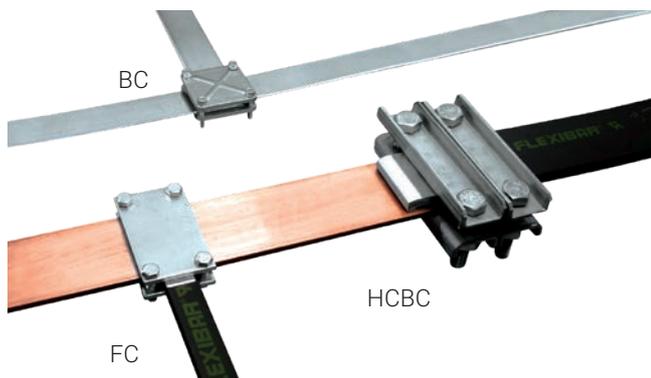


CONNECTING CLAMPS

- Excellent electrical contact
- Saves space
- Fast installation
- Ideal for "on site" modifications

FC CLAMP


- Clamping capacity: 20 mm
- 2 zinc plated steel plates complete with M8 screws 8.8 class



Part No.	Description	A mm	B mm	C mm	D mm	E mm	F mm	Torque N.m		Kg
553020	FC 50 x 24	50	20-24	60	36	75	52	10	3	0,319
553030	FC 50 x 32	50	32	60	44	75	60	10	3	0,362
553040	FC 50 x 40	50	40	60	52	75	68	10	3	0,412
553050	FC 80 x 24	80	20-24	90	36	105	52	10	3	0,432
553060	FC 80 x 32	80	32	90	44	105	60	10	3	0,492
553070	FC 80 x 50	80	50	90	62	105	78	10	3	0,642
568700	FC 100 x 32	100	32	110	44	125	60	10	3	0,670
568730	FC 120 x 32	120	32	130	44	145	60	10	3	0,760

BC RIBBED-STEEL BUSBAR CLAMP


- Clamping capacity: 20 mm
- 2 ribbed zinc-plated hardened-steel plates complete with screws
- Maximum clamping capacity is 50 mm using longer screws 8.8 class
- UL 67 recognized



Part No.	Description	A mm	B mm	C mm	Ø mm	Torque N.m		Kg
553200	BC 30	56	42	30	M6	7	8	0,31
553210	BC 40	66	52	40	M6	7	8	0,37
553220	BC 50	83	64	50	M8	20	8	0,59
553230	BC 63	93	74	63	M8	20	4	0,74
553250	BC 80	118	96	80	M10	40	4	0,118
553260	BC 100	144	118	100	M10	40	4	1,72

HCBC HIGH CURRENT BUSBAR CLAMP

- Clamping capacity: 40 mm
- This modular busbar clamp is designed with non-magnetic materials for high current connections between Flexibar range and rigid busbars such as transformer terminals
- Design assures rigidity and even contact pressure
- Use 2 clamps to guarantee the contact pressure

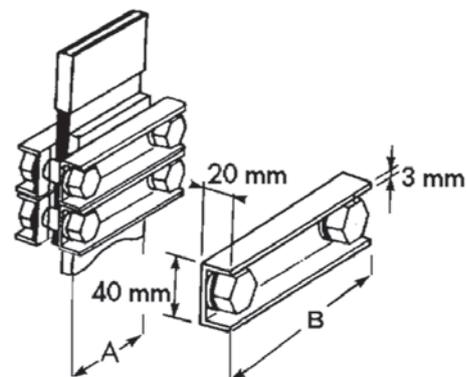

Part No.	Description	A mm	B mm	Torque N.m		Kg
553100	HSBC 80	80	140	100	1	0,84
553110	HSBC 100	100	160	100	1	0,92
553120	HSBC 120	120	180	100	1	1,00


Accessories




FBC CONNECTORS FOR CONNECTING WITHOUT DRILLING

- Very compact for connection without drilling to a 5 mm or 10 mm thick busbar
- Cables from 1 mm² up to 185 mm² or Flexibar range width 6 mm to 20 mm
- Self-support of connector during mounting procedure
- IEC 60 999

Part No.	Description	A mm	B mm	C mm	Flexibar Type mm	Torque N.m	Cable Size mm ²	Box	Kg
553405	FBC 5 x 4	23	29	11	-	2	1 - 4	15	0,016
553400	FBC 5 x 6	28	31	14	6	3	2,5 - 16	15	0,028
553410	FBC 5 x 9	36	40	19	9	6-8	16 - 50	15	0,068
553510	FBC 5 x 15,5	44	40	25	15,5	10-12	35 - 70	15	0,110
553520	FBC 5 x 20	48	40	31	20	12-15	70 - 185	15	0,132

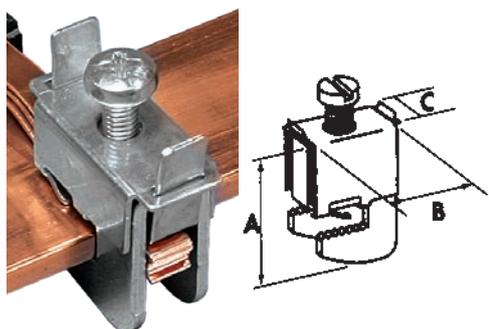

Part No.	Description	A mm	B mm	C mm	Flexibar Type mm	Torque N.m	Cable Size mm ²	Box	Kg
553505	FBC 10 x 4	28	29	12	-	2	1 - 4	15	0,018
553430	FBC 10 x 6	33	31	14	6	3	2,5 - 16	15	0,030
553440	FBC 10 x 9	42	40	19	9	6 - 8	16 - 50	15	0,070
553530	FBC 10 x 15,5	49	40	25	15,5	10 - 12	35 - 70	15	0,112
553540	FBC 10 x 20	54	40	31	20	12 - 15	70 - 185	15	0,138

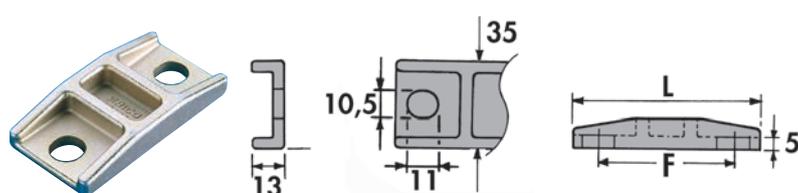

QCC CLAMPS

- For Flexibar thickness < 5 mm = 1 clamp
- For Flexibar thickness > 5 mm = 2 clamps

Part No.	Description	Flexibar width		L mm	F mm	Box	Kg
		min. mm	max. mm				
561210	QCC 15,5/32	15,5	32	70	50	5	0,112
561220	QCC 40/63	40	63	95	75	5	0,158

CONT KIT METAL NUTS AND BOLTS



- Contact Kit
- Enhanced electrical contact
 - 100 nuts - 100 bolts - 200 flat washers
 - 200 contact washers (class 8/8 ZN8C protection)

Part No.	Description	Dimensions	Torque N.m	Box	Kg
558310	Cont Kit M6 x 16	HM 6 x 16	13	100	0,012
558340	Cont Kit M8 x 30	HM 8 x 30	30	100	0,028
558370	Cont Kit M10 x 30	HM 10 x 30	60	100	0,052
558410	Cont Kit M10 x 50	HM 10 x 50	60	100	0,062
558440	Cont Kit M12 x 30	HM 12 x 30	110	100	0,081
558460	Cont Kit M12 x 40	HM 12 x 40	110	100	0,091
558480	Cont Kit M12 x 50	HM 12 x 50	110	100	0,097
567880	Cont Kit M12 x 60	HM 12 x 60	110	100	0,116
558490	Cont Kit M12 x 80	HM 12 x 80	110	100	0,150

Flexibar Hydraulic Work Center



To discover our full range of tools, please request a copy of our specific "Hydraulic & Manual Tools" brochure.



Hydraulic Busbar & Flexibar Puncher



Hydraulic Busbar Bender



Hydraulic Busbar Cutter



Shearing Tool Ruler



Hydraulic Pump & Foot Controller




Hydraulic Flexibar Shearing Tool



Shearing Tool Guide

Flexibar Manual Work Center

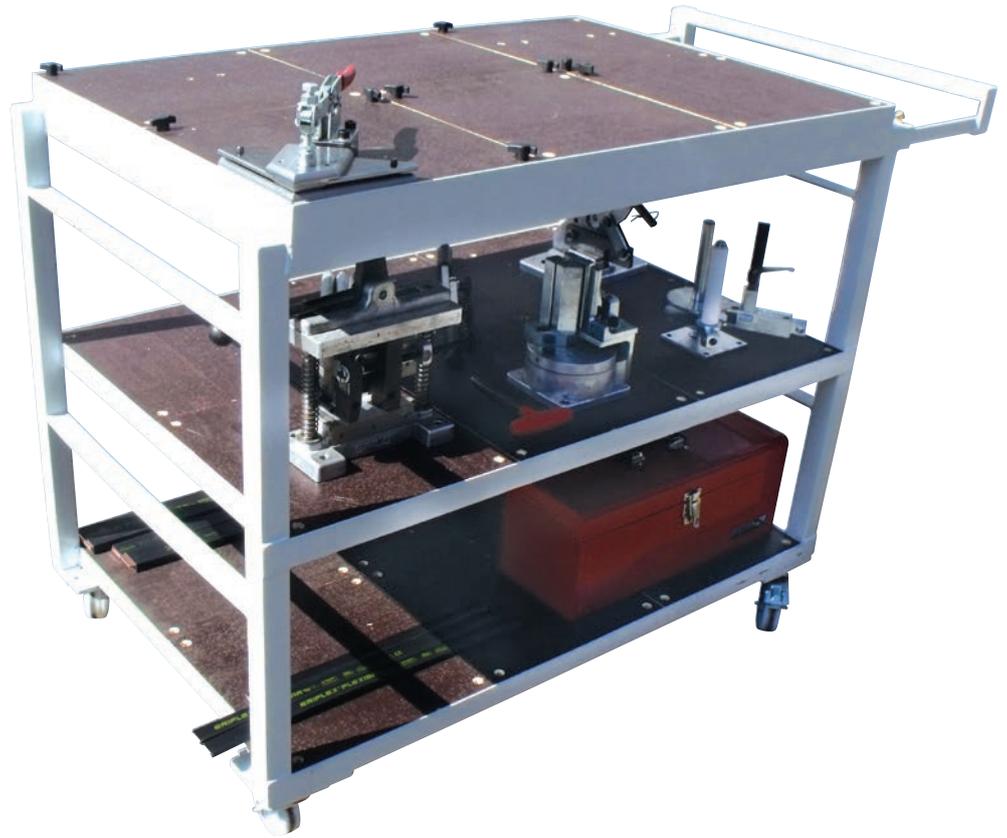

Shearing Tools



Twisting Tool



Bending Tools



Drilling Tool



Punching tools



Folding Tool



Stripping Tool



Stripping Knife



Bending Tool


Flat Insulated Braided Conductor IBS/IBSB Advanced

HALOGEN-FREE-LOWSMOKE-FLAMERETARDANTINSULATEDBRAIDEDCONDUCTORFORCIRCUITBREAKERS



SPACE AND WEIGHT ADVANTAGE

- nVent ERIFLEX IBS & IBSB Advanced require less wire bending space than traditional cable with greater flexibility.
- With greater ampacities, a single piece of IBS & IBSB Advanced can replace multiple runs of cable.
- Protective sleeve and flexibility allows IBS & IBSB Advanced to be mounted in tight areas where rigid busbar or rigid cables can not be used.
- No clearance distance needed around IBS & IBSB Advanced vs other phases or metallic parts due to Class II insulation characteristics.
- Integral solid palm without lugs or terminals reduces material and assembly weight.

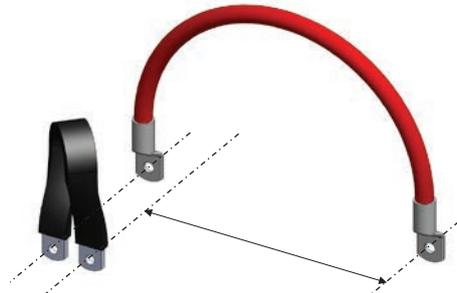


TIME ADVANTAGE

- IBS & IBSB Advanced is a ready to use conductor that does not require lug or tools to fabricate the conductor, reducing installation time and cost.
- Easier to bend and shape than large cables, making installation quicker.



AESTHETIC ADVANTAGE

- Increases design flexibility.
- Neatly organizes hard-to-make connections.

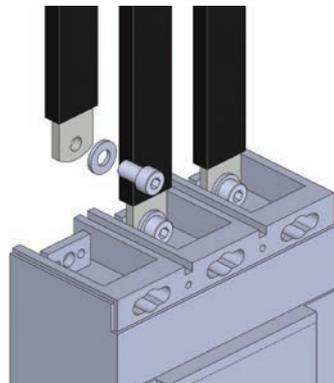

RELIABILITY & SAFETY ADVANTAGE

- IBS & IBSB Advanced are directly connected thus eliminating the cable lug connection and other source of heating point.
- IBS & IBSB Advanced have tinned protected palms for better corrosion resistance.
- Excellent resistance to vibration.
- No crimping.
- Less human error.
- Insulation sleeve manufactured from high-resistance low smoke, halogen-free and flame retardant Thermoplastic (LSHFFR), with a 115°C maximum temperature.



OPERATING ADVANTAGE

- IBS & IBSB Advanced are able to connect on the front access connection of the main molded case circuit breakers.
- Ring terminals or lugs are no longer needed as IBS & IBSB Advanced is already punched. No additional crimping operation is needed.
- The high working temperature 115°C is better than a standard cable that allow reducing the risk of hot point at the connecting area.





The Advanced Technology insulation is a high-resistance low smoke, halogen-free and flame retardant Thermoplastic (LSHFFR), with 115°C high working temperature.

IBS & IBSB Advanced does not generate corrosive gases and produces a relatively **low smoke** opacity in accordance with IEC 61034-2 and UL 2885. The low smoke features improves visibility conditions for people to be able to easily locate the emergency exit and also allows rescue workers to better assess an emergency situation. IBS & IBSB Advanced means greater safety for individuals, less damage for your electrical equipment and less environmental impact.

The **halogen-free** feature enables a reduction in the quantity of toxic smoke. IBS & IBSB Advanced contain no halogens, according to IEC 60754-1 and UL 2885, minimizing toxicity and making it the ideal product for use in enclosed spaces such as data centers, rail and spaces where people are present such as hospitals and schools. This feature also facilitates the use of IBS & IBSB Advanced in specific applications such as submarines, switchboards and other enclosed environments that require a low emissions solution.

In addition to the above features, IBS & IBSB Advanced are compliant with the UL 94-V0 testing standard and Glow wire test 960°C. The **flame retardant** portion of the test illustrates self-extinguishing capabilities. This feature is also shown by the Limiting Oxygen Index (LOI) at 30%. In the case of a fire, IBS & IBSB Advanced generates a limited quantity of smoke that is less damaging to your electrical equipment.



Check out our
nVent ERIFLEX IBS/IBSB Advanced
technical guide.



Main Technical Specifications


Flat IBS and IBSB Advanced

Material	Electrolytic copper Cu-ETP 99,9% purity Thermoplastic Elastomer
Wire Diameter	0,15 mm
Finish	Tinned
Maximum resistivity at 20°C	0.017241 ohms.mm ² / m
Dielectric Strength	20 kV/mm
Flammability Rating	UL® 94V-0 IEC® 60695-2-12 (Glow Wire Test 960 °C)
Halogen Free Rating	UL® 2885 IEC® 60754-1 IEC® 62821-2
Low Smoke Rating	UL® 2885 IEC® 61034-2 ISO 5659-2
Typical Insulation Elongation	> 500%
Typical Insulation Thickness	1.8 mm (0,070 inches)
Nominal Voltage	UL/IEC: 1,000 VAC; 1,500 VDC
Working Temperature	-50 to 115 °C (-58 to 239°F)
Certification Details	UL® 67 UL® 758 CSA 90005
Complies With	IEC® 60695-2-12 (Glow Wire Test 960 °C) IEC® 61439.1 IEC® 61439.1 Class II UV rating according to UL 2556 and UL 854 CE RoHS EN 45545 : HL2 classification Marine & Offshore application certified by : DNV-GL, Bureau Veritas, ABS



Dimension and Packing Unit

Use with Circuit Breaker	Part Number	Article Number	Cross Section mm ²	Conductor Width mm	Conductor Thickness mm	L mm	A mm	B mm	C mm	D mm	HS1 mm	HS2 mm	
	IBSBADV25-230	534400	25	12	2.8	230	7.5	7.5	18	9	6.5	6.5	10
	IBSBADV25-330	534401	25	12	2.8	330	7.5	7.5	18	9	6.5	6.5	10
	IBSBADV25-430	534402	25	12	2.8	430	7.5	7.5	18	9	6.5	6.5	10
	IBSBADV25-530	534403	25	12	2.8	530	7.5	7.5	18	9	6.5	6.5	10
	IBSBADV25-630	534404	25	12	2.8	630	7.5	7.5	18	9	6.5	6.5	10
	IBSBADV25-830	534405	25	12	2.8	830	7.5	7.5	18	9	6.5	6.5	10
	IBSBADV25-1030	534406	25	12	2.8	1030	7.5	7.5	18	9	6.5	6.5	10
	IBSADV25-230	534500	25	20	1.9	230	10	12	25	6	8.5	10.5	10
	IBSADV25-330	534501	25	20	1.9	330	10	12	25	6	8.5	10.5	10
	IBSADV25-430	534502	25	20	1.9	430	10	12	25	6	8.5	10.5	10
IBSADV25-530	534503	25	20	1.9	530	10	12	25	6	8.5	10.5	10	
IBSADV25-630	534504	25	20	1.9	630	10	12	25	6	8.5	10.5	10	
IBSADV25-830	534505	25	20	1.9	830	10	12	25	6	8.5	10.5	10	
IBSADV25-1030	534506	25	20	1.9	1030	10	12	25	6	8.5	10.5	10	
	IBSBADV50-230	534407	50	20	3	230	9	11	27	9	8.5	10.5	10
	IBSBADV50-330	534408	50	20	3	330	9	11	27	9	8.5	10.5	10
	IBSBADV50-430	534409	50	20	3	430	9	11	27	9	8.5	10.5	10
	IBSBADV50-530	534410	50	20	3	530	9	11	27	9	8.5	10.5	10
	IBSBADV50-630	534411	50	20	3	630	9	11	27	9	8.5	10.5	10
	IBSBADV50-830	534412	50	20	3	830	9	11	27	9	8.5	10.5	10
	IBSBADV50-1030	534413	50	20	3	1030	9	11	27	9	8.5	10.5	10
	IBSADV50-230	534507	50	20	3.8	230	12	12	25	7.5	10.5	10.5	10
	IBSADV50-330	534508	50	20	3.8	330	12	12	25	7.5	10.5	10.5	10
	IBSADV50-430	534509	50	20	3.8	430	12	12	25	7.5	10.5	10.5	10
IBSADV50-530	534510	50	20	3.8	530	12	12	25	7.5	10.5	10.5	10	
IBSADV50-630	534511	50	20	3.8	630	12	12	25	7.5	10.5	10.5	10	
IBSADV50-830	534512	50	20	3.8	830	12	12	25	7.5	10.5	10.5	10	
IBSADV50-1030	534513	50	20	3.8	1030	12	12	25	7.5	10.5	10.5	10	
	IBSBADV70-230	534414	70	20	4.3	230	9	11	27	11	8.5	10.5	10
	IBSBADV70-330	534415	70	20	4.3	330	9	11	27	11	8.5	10.5	10
	IBSBADV70-430	534416	70	20	4.3	430	9	11	27	11	8.5	10.5	10
	IBSBADV70-530	534417	70	20	4.3	530	9	11	27	11	8.5	10.5	10
	IBSBADV70-630	534418	70	20	4.3	630	9	11	27	11	8.5	10.5	10
	IBSBADV70-830	534419	70	20	4.3	830	9	11	27	11	8.5	10.5	10
IBSBADV70-1030	534420	70	20	4.3	1030	9	11	27	11	8.5	10.5	10	
	IBSBADV100-230	534421	100	24	5	230	9	11	31	13	8.5	10.5	10
	IBSBADV100-330	534422	100	24	5	330	9	11	31	13	8.5	10.5	10
	IBSBADV100-430	534423	100	24	5	430	9	11	31	13	8.5	10.5	10
	IBSBADV100-530	534424	100	24	5	530	9	11	31	13	8.5	10.5	10
	IBSBADV100-630	534425	100	24	5	630	9	11	31	13	8.5	10.5	10
	IBSBADV100-830	534426	100	24	5	830	9	11	31	13	8.5	10.5	10
IBSBADV100-1030	534427	100	24	5	1030	9	11	31	13	8.5	10.5	10	
	IBSBADV120-230	534428	120	32	4.4	230	11	11	39	12	10.5	10.5	2
	IBSBADV120-330	534429	120	32	4.4	330	11	11	39	12	10.5	10.5	2
	IBSBADV120-430	534430	120	32	4.4	430	11	11	39	12	10.5	10.5	2
	IBSBADV120-530	534431	120	32	4.4	530	11	11	39	12	10.5	10.5	2
	IBSBADV120-630	534432	120	32	4.4	630	11	11	39	12	10.5	10.5	2
	IBSBADV120-830	534433	120	32	4.4	830	11	11	39	12	10.5	10.5	2
IBSBADV120-1030	534434	120	32	4.4	1030	11	11	39	12	10.5	10.5	2	
	IBSBADV185-330	534435	185	32	7.1	330	12	14	39	16	10.5	12.5	2
	IBSBADV185-430	534436	185	32	7.1	430	12	14	39	16	10.5	12.5	2
	IBSBADV185-530	534437	185	32	7.1	530	12	14	39	16	10.5	12.5	2
	IBSBADV185-630	534438	185	32	7.1	630	12	14	39	16	10.5	12.5	2
	IBSBADV185-830	534439	185	32	7.1	830	12	14	39	16	10.5	12.5	2
	IBSBADV185-1030	534440	185	32	7.1	1030	12	14	39	16	10.5	12.5	2
	IBSBADV240-330	534441	240	32	9.2	330	12	14	39	18.5	10.5	12.5	2
	IBSBADV240-430	534442	240	32	9.2	430	12	14	39	18.5	10.5	12.5	2
	IBSBADV240-530	534443	240	32	9.2	530	12	14	39	18.5	10.5	12.5	2
	IBSBADV240-630	534444	240	32	9.2	630	12	14	39	18.5	10.5	12.5	2
	IBSBADV240-830	534445	240	32	9.2	830	12	14	39	18.5	10.5	12.5	2
	IBSBADV240-1030	534446	240	32	9.2	1030	12	14	39	18.5	10.5	12.5	2

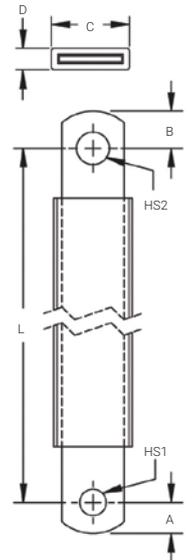

How to select nVent ERIFLEX IBS & IBSB Advanced?

When sizing a conductor, the air temperature around the conductor is a very important parameter, mainly affected by factors such as convection type, protection level of enclosure or the temperature rise. Based on IEC 61439 standards, the ambient air temperature does not exceed +40°C and its average over a period of 24h does not exceed +35°C.

For IBS & IBSB Advanced, we provided an ampacity table under different temperature rise, a lower temperature rise maybe used when the ambient temperature is higher than usual.

TEMPERATURE RISE OF THE CONDUCTOR.

Temperature rise of the conductor (ΔT) = Temperature of the conductor – Internal temperature of the panel.

• Temperature rise of conductor = $T_2 - T_1 = \Delta T$ (C°)

Example:


For a requested current of 630A, with: $T_1 = 40^\circ\text{C}$ and $T_2 = 90^\circ\text{C}$

• $\Delta T = 90 - 40 = 50^\circ\text{C}$

• in the ΔT 50°C column, find the closest current value to 630A.

Result: IBSB Advanced 240 mm² – 718A (IEC & UL).

For IBS & IBSB Advanced, we recommend the maximum temperature rise does not exceed 50°C for a normal application. Generally, 50°C is chosen as the default temperature rise considering the ambient temperature inside the panel is below 40°C. But when the connected section is an electrical component which may dissipate heat (for example circuit breaker) or the ventilation inside the enclosure is not efficient, it may be necessary to choose lower temperature rise.

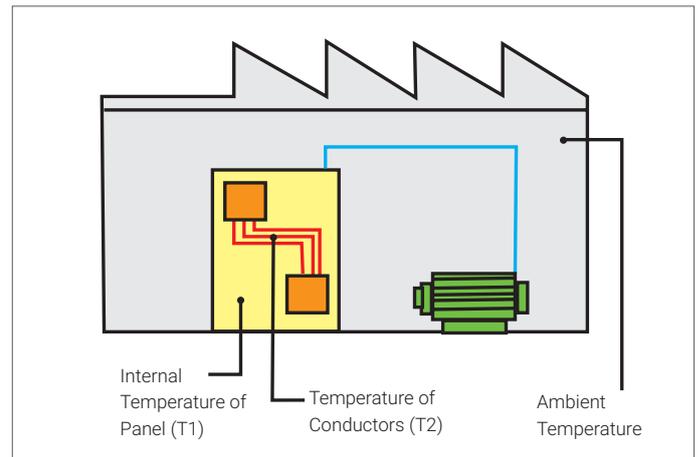

Insulated Braided conductor type	Cross Section mm ² (kcmil)	Maximum Ampacity Ratings							Current Coefficient	
		ΔT 30° C (A)	ΔT 40° C (A)	ΔT 45° C (A)	ΔT 50° C (A)	ΔT 55° C (A)	ΔT 60° C (A)	ΔT 70° C (A)		
IBSB ADV 25	25 (49.34)	116	134	142	150	157	164	177	1.6	2
IBS ADV 25	25 (49.34)	137	158	167	177	185	193	209	1.6	2
IBS ADV 50 IBSB ADV 50	50 (98.68)	213	246	260	274	288	301	325	1.6	2
IBSB ADV 70	70 (138.15)	226	261	277	291	306	319	345	1.6	2
IBSB ADV 100	100 (197.35)	298	344	365	385	404	422	456	1.6	2
IBSB ADV 120	120 (236.82)	363	419	444	468	491	513	554	1.6	2
IBSB ADV 185	185 (365.1)	416	480	509	537	563	588	635	1.6	2
IBSB ADV 240	240 (473.65)	556	642	681	718	753	786	849	1.6	2

Admissible currents: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

IBS & IBSB ADVANCED IN PARALLEL



When using 2 or 3 IBS & IBSB Advanced in parallel for the same phase, use the current coefficient showed on the above IEC & UL ampacities table.

Example:

IBSB Advanced 240 mm² – $\Delta T = 50^\circ\text{C}$: 718 A (IEC & UL)

• 2 Braids in parallel: 718 A x 1,6 = 1149 A


• 3 Braids in parallel: 718 A x 2 = 1436 A



IBS & IBSB Advanced Connection on Molded Case Circuit Breaker

The IBS & IBSB Advanced range can be used as an alternative to cable for all low-voltage applications. It is suitable and connectable for molded case circuit breaker ranges, including most compact breakers on the market. From 80A up to 630A circuit breakers, you can directly connect the IBS & IBSB Advanced on the front access terminals breaker without additional accessories, such as angular connectors, spreaders, ring terminal connectors or extenders. No lugs and no cutting, stripping or crimping are necessary.

Simple, quick, ready to use!

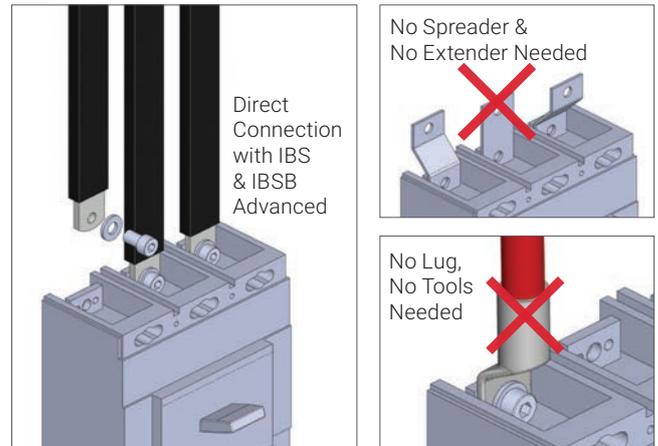

CIRCUIT BREAKER COMPATIBILITY

Circuit Breaker Current Rating	125/160 A		250 A		300 A	350 A	400 A	500 A	630 A
Insulated Braided conductor type	IBSB ADV 25x	IBS ADV 25x	IBSB ADV 50x	IBS ADV 50x	IBSB ADV 70x	IBSB ADV 100x	IBSB ADV 120x	IBSB ADV 185x	IBSB ADV 240x
Schneider Electric Compact (IEC)	NSA NG 125	NSX 100 NSX 160	NSX 250	NSX 250	NSX 400	NSX 400	NSX 400	NSX 630	NSX 630
Square D PowerPact (UL)	H-Frame	J-Frame	J-Frame	J-Frame	L-Frame	L-Frame	L-Frame	–	–
ABB Tmax (IEC)	T1		T3	T3					
	T2	–	XT3	XT3					
	XT1		XT4	XT4	T4	T4	T5	T5	T5
ABB Tmax (UL)	XT2								
	T1		T4	T4					
	T2		XT3	XT3	T5	T5	T5	–	–
GE Record Plus (IEC/UL)	XT1	T3	XT4	XT4					
	XT2								
	FD 160	FE 160	FE 250	FE 250	FG 400	FG 400	FG 400	FG 630	FG 630
Siemens Sentron (IEC/UL)	VL160X								
	3VL1	–	VL250	VL250	VL400	VL400	VL400	–	–
	VL160		3VL3	3VL3	3VL4	3VL4	3VL4		
Moeller xEnergy (IEC)	3VL2								
	NZM1		NZM2	NZM2	NZM3	NZM3	NZM3	NZM3	NZM3
Cutler Hammer Series G (UL)	EG Frame	JG Frame	JG Frame	JG Frame	LG Frame	LG Frame	LG Frame	LG Frame	LG Frame
Legrand (IEC)	DPX 160	–	DPX 250	DPX 250	DPX 630	DPX 630	DPX 630	DPX 630	DPX 630
	DPX3 160		DPX3 250	DPX3 250					
Hager (IEC)	h3 160	–	h3 250	h3 250	h3 630	h3 630	–	–	–
Rockwell/Allen Bradley (UL)	G-Frame	–	I-Frame	I-Frame	I-Frame	–	K-Frame	K-Frame	–
	H-Frame		J-Frame	J-Frame	J-Frame				
Mitsubishi Electric (IEC)		NF125							
		NF160	NF250	NF250		NF400			
		DSN125	DSN250	DSN250		DSN400			
OEZ (IEC)		DSN160							
	BC160N	–	BD250N	BD250N	BH630B	BH630B	BH630B	BH630B	BH630B
		BD250S	BD250S	BH630S	BH630S	BH630S	BH630S	BH630S	

This table does not take into account some specific installation environment, like ambient temperature, protection level of enclosure, altitude, frequency.

Some MCCB may need more important cross section in function of the MCCB Power dissipation. In some case, increase the IBS & IBSB Advanced cross section may be necessary to support MCCB heating dissipation. It is therefore necessary to respect the instructions provided by the electrical device manufacturer.

Round Insulated Braided Conductor IBS Advanced

IBS 120
IBS 185
IBS 240



INSULATION

- Dielectric Strength: 20 kV/mm
- Insulation Elongation: 500 %
- Insulation Thickness: 1.8 mm
- Max Working Voltage, IEC/UL 758: 1,000 VAC; 1,500 VDC
- Max Working Voltage, UL 67: 600 VAC/DC
- Working Temperature: -50 to 115 °C
- Certification Details: UL® 67; UL® 758
- Complies With: IEC® 60695-2-11 (Glow Wire Test 960 °C); IEC® 61439.1; IEC® 61439.1 Class II
- UV rating according to UL 2556 and UL 854

BRAID

- Tinned electrolytic copper for better corrosion protection
- Wire diameter: 0.15 mm for maximum flexibility

CERTIFICATION & APPROVAL

- Flammability Rating: UL® 94V-0
- Halogen Free Rating: UL® 2885; IEC® 60754-1; IEC® 62821-1
- Low Smoke Rating: IEC® 61034-2; ISO 5659-2; UL® 2885
- IEC 61439.1
- cRUus per UL67 & CAN/CSA C22.2 No. 29
- CE conformity
- RoHS compliant
- RU per UL758
- American Bureau of Shipping (ABS) Bureau Veritas : Marine & Offshore application.
- CSA C22.2 No 210 for appliance wiring material products
- Conforms to NF EN 45545 obtaining an HL2 classification for chapters R22 and R23

DIELECTRIC TEST

- 3500 VAC, 1 minute according to the IEC 61439 standard (rated insulation voltage U_i 1000 VAC)
- 6000 VAC, 1 minute with 6 mA creepage current set up

FEATURES

- Resistant to vibration, improving reliability and performance
- Insulated by high-resistance, halogen free, flame retardant and low smoke material
- Tinned copper provides superior corrosion resistance
- Improves assembly flexibility and aesthetics
- Quick and easy installation
- No additional cutting, stripping, crimping and punching needed


TECHNICAL DATA

- Intensity = 100A up to 1000A
- Excellent electrical contact
- Good tensile strength



Round Insulated Braided Conductor IBS Advanced

IBS 120
IBS 185
IBS 240

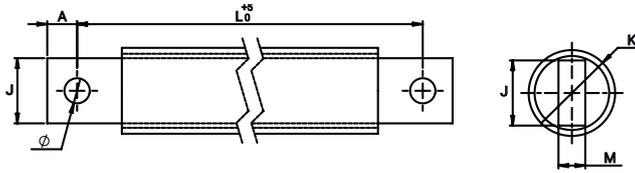

	Part No.	IBS 120	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm			Kg
	534514	IBS 120-330-10	120	330	10,5	12	24	10	27	2		0,51
	534515	IBS 120-430-10	120	430	10,5	12	24	10	27	2		0,67
	534516	IBS 120-530-10	120	530	10,5	12	24	10	27	2		0,82
	534517	IBS 120-630-10	120	630	10,5	12	24	10	27	2		0,98
	534518	IBS 120-830-10	120	830	10,5	12	24	10	27	2		1,29
	534519	IBS 120-1030-10	120	1030	10,5	12	24	10	27	2		1,6

	Part No.	IBS 185	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm			Kg
	534520	IBS 185-330-10	185	330	10,5	12	24	15	31	2		0,82
	534521	IBS 185-430-10	185	430	10,5	12	24	15	31	2		1,07
	534522	IBS 185-530-10	185	530	10,5	12	24	15	31	2		1,26
	534523	IBS 185-630-10	185	630	10,5	12	24	15	31	2		1,48
	534524	IBS 185-830-10	185	830	10,5	12	24	15	31	2		1,9
	534525	IBS 185-1030-10	185	1030	10,5	12	24	15	31	2		2,3

	Part No.	IBS 240	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm			Kg
	534526	IBS 240-330-12	240	330	12,5	13	32	15	36	2		1,03
	534527	IBS 240-430-12	240	430	12,5	13	32	15	36	2		1,34
	534528	IBS 240-530-12	240	530	12,5	13	32	15	36	2		1,65
	534529	IBS 240-630-12	240	630	12,5	13	32	15	36	2		1,96
	534530	IBS 240-830-12	240	830	12,5	13	32	15	36	2		2,58
	534531	IBS 240-1030-12	240	1030	12,5	13	32	15	36	2		3,2

Insulated Braided conductor type	Section mm ²	ΔT (K)								Current Coefficient
		30	40	45	50	55	60	70		
IBS 120	120	325	376	398	420	441	460	497	1,6	
IBS 185	185	407	470	499	526	552	576	622	1,6	
IBS 240	240	488	563	598	630	661	690	745	1,6	

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

Advanced Insulated Braided IBSHY Conductor for Compact Circuit Breakers




FEATURES


- Suitable for all main 125/160 A electrical devices and specifically molded case circuit breakers
- Resistant to vibration, improving reliability and performance
- Improves assembly flexibility and aesthetics
- Quick and easy installation
- No additional cutting, stripping, crimping and punching needed
- Small wire diameter provides maximum flexibility
- Halogen-free solution for applications requiring a low smoke solution
- DNV-GL certified busbar systems for electrical installation for ship and marine application
- Conforms to NF EN 45545 obtaining an HL2 classification for chapters R22 and R23
- High working temperature
- RoHS compliant



IBSHY INSULATED BAIED CONDUCTOR SPECIFICATIONS

- Typical Application Current Rating: 160 A
- Finish: Tinned
- Material: Copper; Glass Fibre Reinforced Silicon
- Flammability Rating: UL 1441 VW-1
- Max Working Voltage, IEC (Ui): 1 000 VAC; 1 500 VDC
- Operating Temperature: from -60 °C to 250 °C
- Wire Diameter: 0.15 mm
- IEC 61439-1 compliant

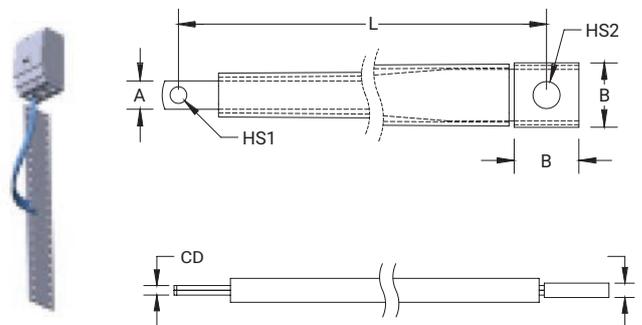

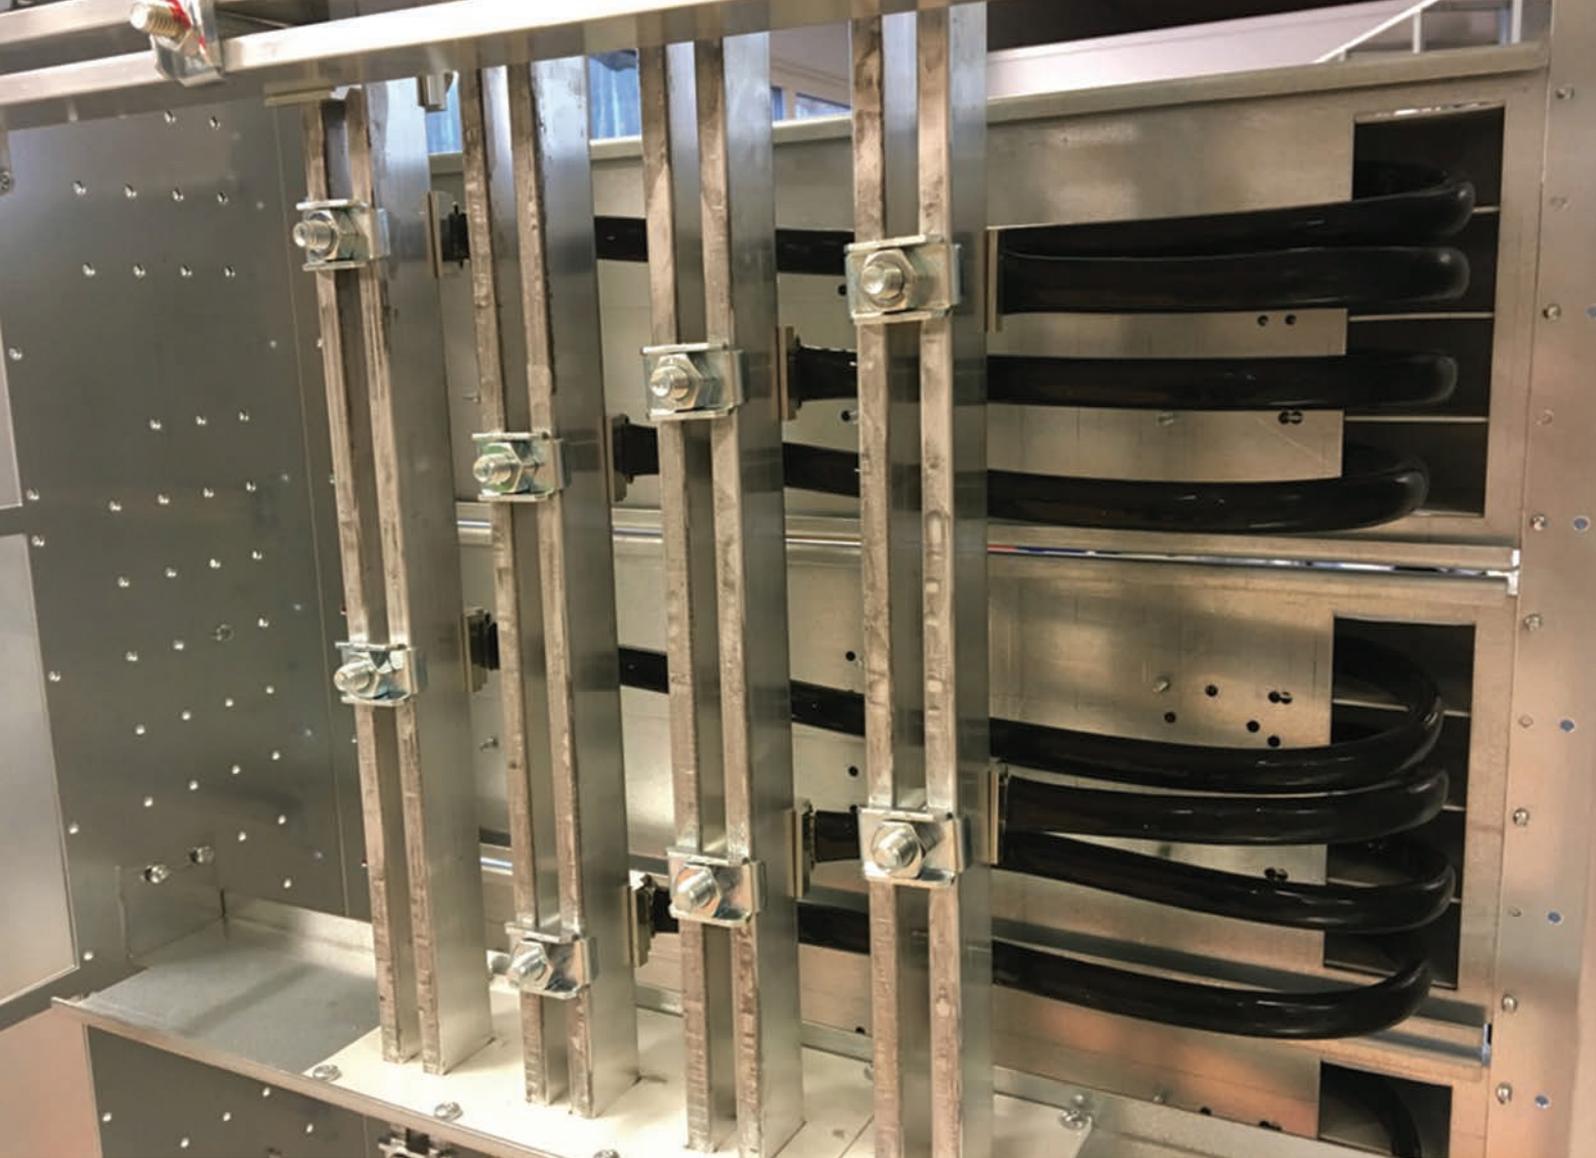

IBSHY ADVANCED INSULATED BAIDED CONDUCTOR TECHNICAL CHARACTERISTICS


Part No.	Article No.	Cross Section	Length L	A	B	C	D	Hole Size 1 HS1	Hole Size 2 HS2
IBSHY32-230	558584	32 mm ²	230 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-330	558586	32 mm ²	330 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-365	558587	32 mm ²	365 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-430	558588	32 mm ²	430 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-500	558589	32 mm ²	500 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-565	558591	32 mm ²	565 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-630	558592	32 mm ²	630 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-700	558593	32 mm ²	700 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-765	558594	32 mm ²	765 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-830	558595	32 mm ²	830 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm

Maximum Ampacity Ratings


Cross Section (mm ² /kcmil)	ΔT 30° C (A)	ΔT 35° C (A)	ΔT 40° C (A)	ΔT 45° C (A)	ΔT 50° C (A)	ΔT 55° C (A)	ΔT 60° C (A)	ΔT 65° C (A)	ΔT 70° C (A)	ΔT 75° C (A)	ΔT 80° C (A)	ΔT 100° C (A)	ΔT 120° C (A)	2 Bar Current Coefficient	3 Bar Current Coefficient
32/63.15	142	153	164	174	184	193	201	209	217	225	235	263	290	1.6	2

ΔT = Temperature of conductors – Internal temperature of panel.

This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

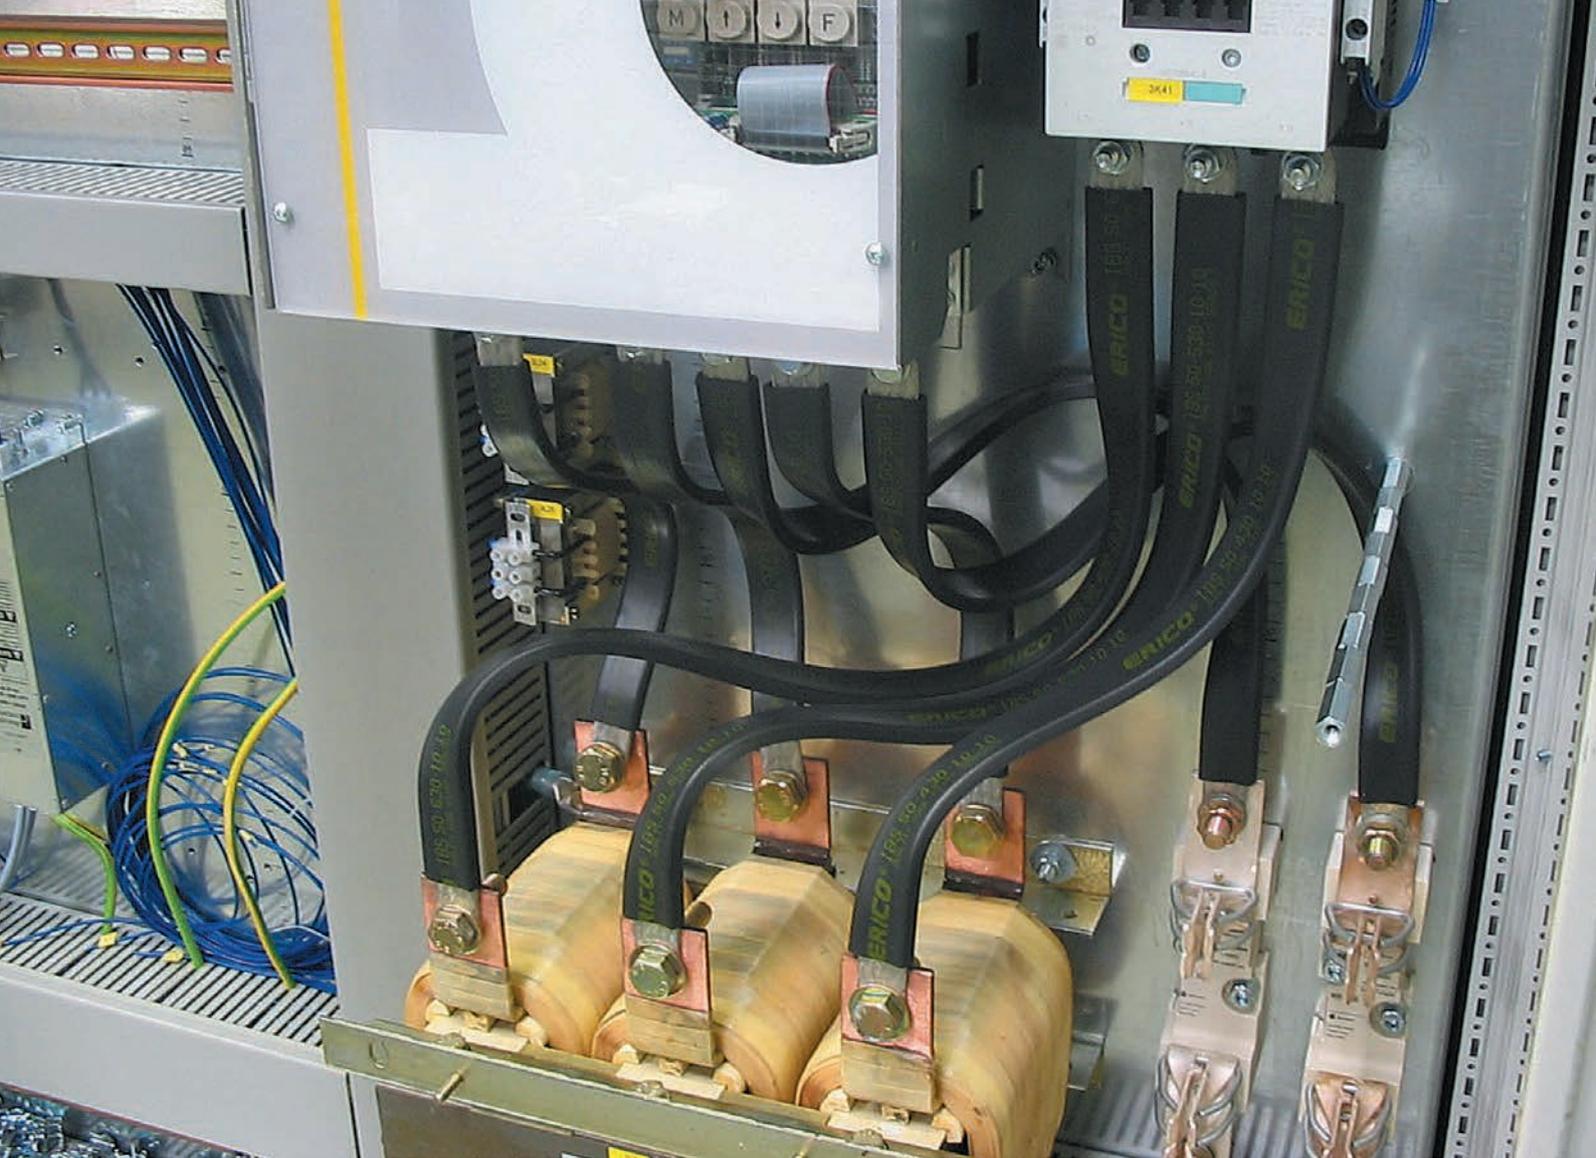


ASSEMBLY INSTRUCTIONS

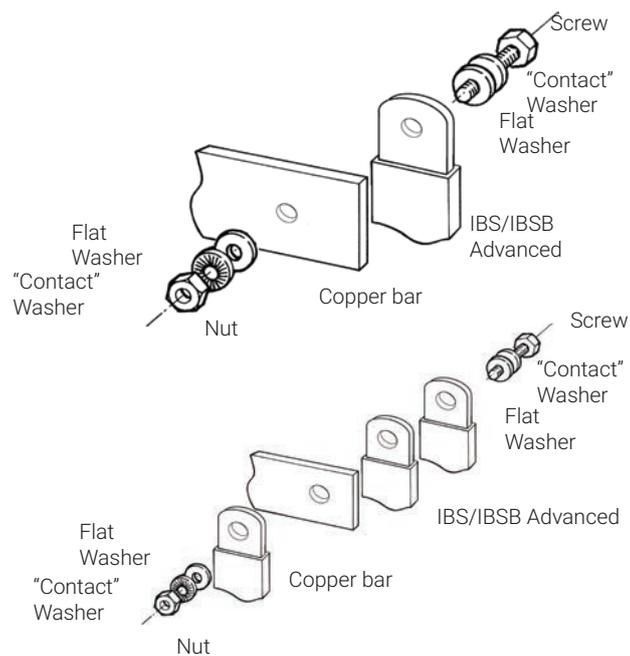


Space between 2 or 3 insulated braided conductors in parallel, for cooling.

A minimum air gap is required. Use FS type spacer clamp.

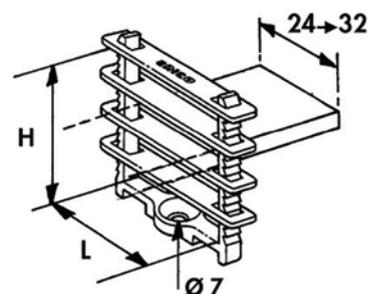

Designation	Part No.	For insulated braided conductor type
FS 24	553550	IBS Advanced 25 / 50 IBSB Advanced 25 / 50 / 70 / 100
FS 32	553560	IBSB Advanced 120 / 185 / 240

Grounding and Bonding tinned Copper Braids (MBJ & BJ)

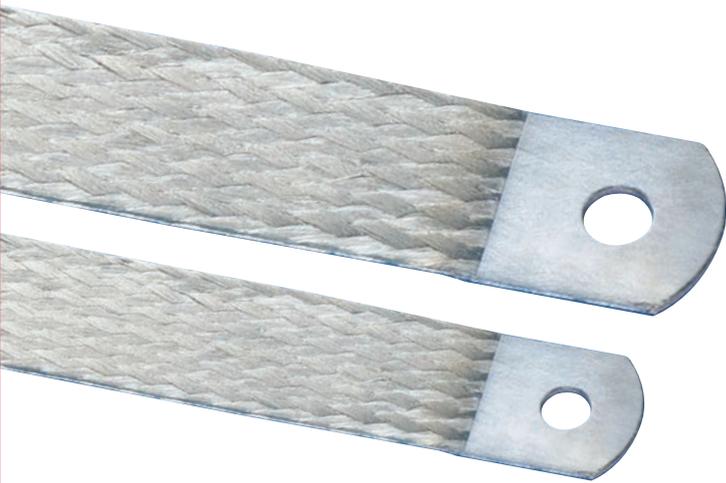

TINNED COPPER EARTH/GROUND BRAID TECHNICAL FEATURES

With integral palm

- A complete range of earth/ground flexible connections from 6 to 100 mm² section and from 100 to 500 mm length
- Strong resistance to vibration and fatigue
- Reliable: No extra contact due to the lugs crimped at the ends of the cable
- Weight savings: A flat braid weighs less than a cable (with insulation) and lugs and offers better copper usage (skin effect)
- Integral palm, without tin or crimped lugs for superior electrical contact and tensile strength resistance
- Quick and easy to install: Ready to use. No cutting, stripping, crimping or punching. Less labor time for installation
- Material savings: no lugs or terminals
- Recommended by the EMC/EMI directives and less impedance than cables

INNOVATIVE, STATE-OF-THE-ART MANUFACTURING PROCESS.

nVent ERIFLEX manufacturing directly massivates the palms of the MBJ tinned-plated braids. This manufacturing process provides an effective electrical contact, due to the integral palms, without the addition of tin or crimped lugs.

This process welds the flexible braid and brings back a solid tinned or red copper block as a palm. Unlike the traditional press-welded palms process, nVent ERIFLEX's process is suitable for red copper, but also for tin plated copper. The electrical contact between each wire is optimized.

This nVent ERIFLEX process also helps eliminate moisture issues in the palms. By using crimped lugs in a severe environment, moisture can enter in the lug (often by capillarity) and create corrosion between each wire. After several years, the electrical contact between each wire can deteriorate and alter the electrical conductivity of the equipment. The corrosion in the palm is impossible to remove without changing the element.

This process produces RoHS products; no additional substances are added to the tinned-plated wires during the manufacturing process.

BJ

Round braids with crimped lugs





Part No.	Description	Section mm	L mm	Ø D mm	Intensity A		 Kg
556900	BJ 6-150 S	6	150	6,5	45	10	0,010
556910	BJ 6-200 S	6	200	6,5	45	10	0,015
556920	BJ 10-300 S	10	300	6,5	75	10	0,033



GROUNDING AND BONDING TINNED COPPER BRAIDS (MBJ & BJ) TECHNICAL CHARACTERISTICS

Part Number	Description	Intensity A	Thickness mm	Section mm ²	L mm	Ø mm	J mm	T mm			Kg
556600	MBJ 6-150-6	40	1,1	6	150	6,5	11	18	10		0,01
563410	MBJ 6-200-6	40	1,1	6	200	6,5	11	18	10		0,0167
556930	MBJ 10-200-6	75	1,1	10	200	6,5	11	18	10		0,022
556610	MBJ 10-300-6	75	1,1	10	300	6,5	11	18	10		0,033
563540	MBJ 16-100-6	120	1,5	16	100	6,5	15	20	10		0,018
556620	MBJ 16-100-8	120	1,5	16	100	8,5	15	20	10		0,018
563550	MBJ 16-150-6	120	1,5	16	150	6,5	15	20	10		0,035
556630	MBJ 16-150-8	120	1,5	16	150	8,5	15	20	10		0,035
563300	MBJ 16-200-6	120	1,5	16	200	6,5	15	20	10		0,033
556640	MBJ 16-200-8	120	1,5	16	200	8,5	15	20	10		0,033
556650	MBJ 16-250-8	120	1,5	16	250	8,5	15	20	10		0,04
563320	MBJ 16-300-6	120	1,5	16	300	6,5	15	20	10		0,05
556660	MBJ 16-300-8	120	1,5	16	300	8,5	15	20	10		0,05
556940	MBJ 16-500-8	120	1,5	16	500	8,5	15	20	10		0,082
556670	MBJ 25-100-10	150	1,5	25	100	10,5	22	28	10		0,027
556680	MBJ 25-150-10	150	1,5	25	150	10,5	22	28	10		0,039
563340	MBJ 25-200-6	150	1,5	25	200	6,5	22	28	10		0,052
555200	MBJ 25-200-8	150	1,5	25	200	8,5	22	28	10		0,052
556690	MBJ 25-200-10	150	1,5	25	200	10,5	22	28	10		0,052
563430	MBJ 25-200-12	150	1,5	25	200	12,5	22	28	10		0,052
556700	MBJ 25-250-10	150	1,5	25	250	10,5	22	28	10		0,064
555201	MBJ 25-300-8	150	1,5	25	300	8,5	22	28	10		0,077
556710	MBJ 25-300-10	150	1,5	25	300	10,5	22	28	10		0,077
556950	MBJ 25-500-10	150	1,5	25	500	10,5	22	28	10		0,13
556720	MBJ 30-100-10	180	2	30	100	10,5	22	28	10		0,032
556730	MBJ 30-150-10	180	2	30	150	10,5	22	28	10		0,047
556740	MBJ 30-200-10	180	2	30	200	10,5	22	28	10		0,062
556750	MBJ 30-250-10	180	2	30	250	10,5	22	28	10		0,075
556760	MBJ 30-300-10	180	2	30	300	10,5	22	28	10		0,092
556960	MBJ 30-500-10	180	2	30	500	10,5	22	28	10		0,155
556770	MBJ 35-100-10	197	2,1	35	100	10,5	22	28	10		0,037
556780	MBJ 35-150-10	197	2,1	35	150	10,5	22	28	10		0,054
556790	MBJ 35-200-10	197	2,1	35	200	10,5	22	28	10		0,072
556800	MBJ 35-250-10	197	2,1	35	250	10,5	22	28	10		0,089
565000	MBJ 35-250-25	197	3	35	250	25,5	40	45	10		0,089
556810	MBJ 35-300-10	197	2,1	35	300	10,5	22	28	10		0,11
556970	MBJ 35-500-10	197	2,1	35	500	10,5	22	28	10		0,18
556820	MBJ 50-100-10	250	2,5	50	100	10,5	28	33	10		0,052
556830	MBJ 50-150-10	250	2,5	50	150	10,5	28	33	10		0,077
563350	MBJ 50-200-6	250	2,5	50	200	6,5	28	33	10		0,12
556840	MBJ 50-200-10	250	2,5	50	200	10,5	28	33	10		0,12
563440	MBJ 50-200-12	250	2,5	50	200	12,5	28	33	10		0,12
563360	MBJ 50-200-16	250	2,5	50	200	16,5	28	33	10		0,11
563370	MBJ 50-200-18	250	2,5	50	200	18,5	28	33	10		0,11
556850	MBJ 50-250-10	250	2,5	50	250	10,5	28	33	10		0,127
563380	MBJ 50-300-6	250	2,5	50	300	6,5	28	33	10		0,15
556860	MBJ 50-300-10	250	2,5	50	300	10,5	28	33	10		0,153
563390	MBJ 50-300-16	250	2,5	50	300	16,5	28	33	10		0,15
563400	MBJ 50-300-18	250	2,5	50	300	18,5	28	33	10		0,14
556980	MBJ 50-500-10	250	2,5	50	500	10,5	28	33	10		0,255
563560	MBJ 50-500-12	250	2,5	50	500	12,5	28	33	10		0,255
563450	MBJ 70-300-6	290	3,4	70	300	6,5	28	33	10		0,21
563460	MBJ 70-300-10	290	3,4	70	300	10,5	28	33	10		0,21
563420	MBJ 70-300-12	290	3,4	70	300	12,5	28	33	10		0,21
563470	MBJ 70-300-16	290	3,4	70	300	16,5	28	33	10		0,2
563480	MBJ 70-300-22	290	3	70	300	22,5	40	45	10		0,2
563490	MBJ 70-500-10	290	3,4	70	500	10,5	28	33	10		0,34
563500	MBJ 100-250-16	349	4	100	250	16,5	50	55	10		0,254
563510	MBJ 100-250-30	349	4	100	250	30,5	50	55	10		0,254
563520	MBJ 100-500-16	349	4	100	500	16,5	50	55	10		0,508
563530	MBJ 100-500-30	349	4	100	500	30,5	50	55	10		0,508

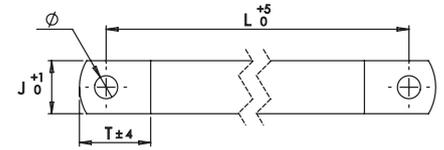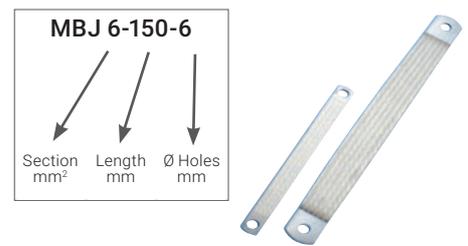


TECHNICAL DATA

- Recommended by EMC/EMI directives
- Flat tinned copper braids
- Electrolytic copper Cu-ETP according to standard EN13602
- Copper purity of minimum 99,9%
- Maximum resistivity of 0,017241 mm²/m at 20°C
- Standard wire diameter; 0,15 mm
- Bends very close to the contact area

CERTIFICATION & APPROVALS

- UL Listed (UL467) except BJ
- EAC certificate
- RoHS 2002/95/EC Compliant
- IEC 61439-1

Comparison of tensile strength

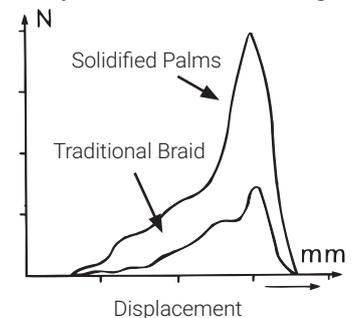

Nominal clamping force



Grounding and Bonding Braid, Tinned Copper with Halogen Free & Flame retardant Yellow Green insulation

MBJ YG

MBJYG Grounding and Bonding Braids are a reliable and convenient ground solution for applications that require flexibility and durability. Designed with halogen-free and flame retardant Yellow Green insulation, MBJYG braids are made with tinned copper ground braids and solid palms that are ready to install without any additional cutting, stripping, crimping or punching. MBJYG braids also do not require the addition of tin or crimped lugs and the proprietary manufacturing process helps optimize the electrical contact between each wire and helps eliminate moisture issues in the palms, helping prevent corrosion and extend the useful life of the braid.

TECHNICAL DATA

- Provides weight and material savings with lower impedance when compared to similar lugged cables with insulation (Recommended by the EMC/EMI directives)



TECHNICAL FEATURE


- Tinned copper Integral palm, without crimped lugs for superior electrical contact and tensile strength resistance
- Complete range of earth/ground flexible connections from 6 - 25 mm² (11.84 - 49.33 kcmil) cross section and from 100 - 300 mm (3.937" - 11.811") length
- Working Temperature: -55 to 125 °C
- Ready to use out of the box, eliminating the need for cutting, stripping, crimping and punching
- Resistant to vibration and fatigue, reducing maintenance



CERTIFICATION & APPROVALS

- Halogen free and Flame retardant yellow green insulation
- UL 467 listed and IEC 61439-1 certified

Part Number	Article Number	Current A	Thickness T mm	Cross Section mm ²	Length L mm	Hole Size HS mm	A mm	B mm	Kg	
MBJYG6-100-6	563601				100				0,012	
MBJYG6-150-6	563602				150				0,017	
MBJYG6-200-6	563603	40	1,1	6	200	6,5	11	18	0,013	10 pc
MBJYG6-250-6	563604				250				0,028	
MBJYG6-300-6	563605				300				0,02	
MBJYG10-100-6	563606				100				0,012	
MBJYG10-150-6	563607				150				0,017	
MBJYG10-200-6	563608	75	1,1	10	200	6,5	11	18	0,013	10 pc
MBJYG10-250-6	563609				250				0,028	
MBJYG10-300-6	563611				300				0,02	
MBJYG16-100-8	563612				100				0,02	
MBJYG16-150-8	563613				150				0,028	
MBJYG16-200-8	563614	120	1,5	16	200	8,5	15	20	0,036	10 pc
MBJYG16-250-8	563615				250				0,044	
MBJYG16-300-8	563616				300				0,052	
MBJYG25-100-8	563617				100				0,03	
MBJYG25-150-8	563618				150				0,044	
MBJYG25-200-8	563619	150	1,5	25	200	8,5	22	28	0,056	10 pc
MBJYG25-250-8	563621				250				0,069	
MBJYG25-300-8	563622				300				0,082	

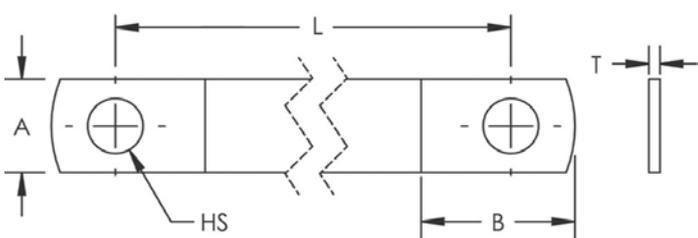

TECHNICAL DATA

- Material: Copper; Polyolefin
- Finish: Tinned
- Dielectric Strength: 15 kV/mm
- Flammability Rating: UL® 224 VW-1
- Halogen-Free Rating: EN 14582
- Nominal Voltage, UL/CSA/IEC: 600 V
- Working Temperature: -55 to 125 °C
- Complies With: IEC® 61439.1
- Certifications: CE; cULus; RoHS



Grounding & bonding braid


Stainless steel braids (CPI)



READY-TO-USE STAINLESS STEEL BRAIDS FOR MULTIPLE APPLICATIONS


nVent ERIFLEX develops and manufactures a range of grounding & bonding stainless steel braids. These high-quality 316L stainless steel braids can be installed in extremely corrosive environments, like offshore applications or coastal applications. The CPI braid is ideal for applications using stainless steel pipe or tanks, like the food and beverage industry, building industry, transportation, oil and chemical industry.

nVent ERIFLEX offers 316L stainless steel, one of the highest resistant stainless steel options on the market. nVent ERIFLEX has mastered the process of manufacturing stainless steel for braiding, crimping, cutting or punching and offers a full range of ready-to-use stainless steel braids.

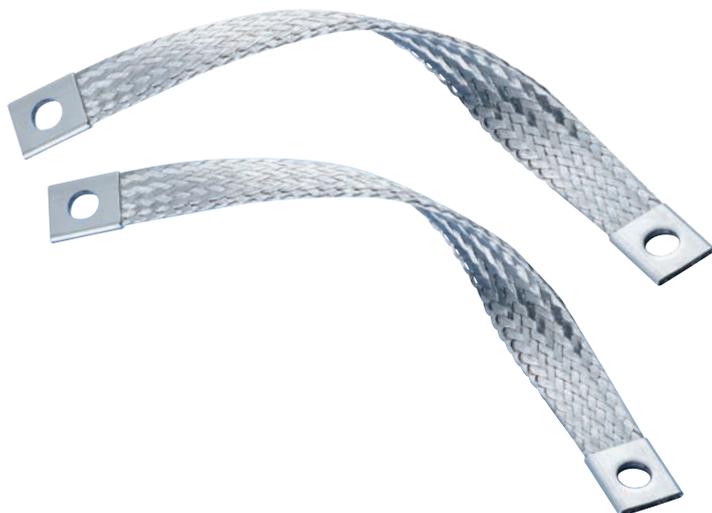


CPI FEATURES

- 316L stainless steel braid ready to use
- Full application range: 16 to 70 mm² section with 150 to 1100 mm length
- High-quality 316L stainless steel: superior abrasion, corrosion, chemical, and UV resistance for outdoor applications
- Good resistance to vibration and fatigue
- Time savings: quick and easy to install. Ready to use. No additional cutting, stripping, crimping and punching needed. Less labor time for installation
- Material savings: No additional lugs or terminals needed
- Durable in outdoor, salt and corrosive environments
- Non-magnetic material
- Long maintenance cycle
- Superior abrasion, corrosion, chemical and UV resistance make it ideal for outdoor applications
- Great for expansion joints where constant movement requires a flexible and indestructible covering
- Won't rust or discolor, so the appearance will never fade or change
- No additional cutting, stripping, or crimping needed
- More flexible connection
- Pre-punched: ready to use
- Quick and easy to install
- Excellent electrical contact
- Strong resistance to vibration and fatigue
- Recommended by the EMC directives
- Reduced maintenance

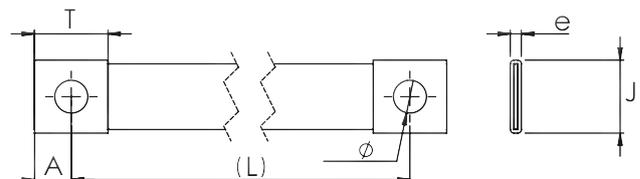

GROUNDING AND BONDING STAINLESS STEEL BRAIDS CPI TECHNICAL CHARACTERISTICS

WHERE STAINLESS BRAIDS CAN BE USED:

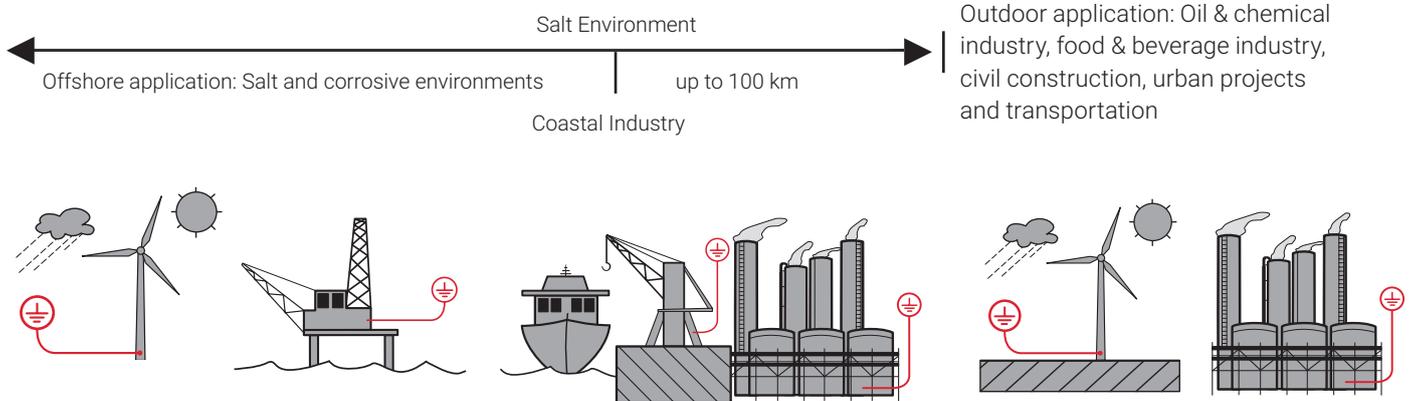

TECHNICAL DATA

- Excellent electrical contact
- Good tensile strength

BRAID

- 316L Stainless steel
- Wire diameter: 0,25 mm for maximum flexibility
- Strong resistance to vibration

CERTIFICATIONS & APPROVALS

- UL Listed UL467 - grounding and bonding equipment for US and Canada
- RoHS Compliant
- IEC 61439-1
- ABS American Bureau of Shipping Certificate No. 13-HS1018106-1-PDA-DUP

Part Number	Description	Section mm ²	L mm	Ø mm	J mm	A mm	T mm	e mm		Kg
554277	CPI 16-150-8	16	150	8,5	17,5	10	20	3	10	0,031
554278	CPI 16-200-8	16	200	8,5	17,5	10	20	3	10	0,037
554279	CPI 16-250-8	16	250	8,5	17,5	10	20	3	10	0,043
554280	CPI 16-300-8	16	300	8,5	17,5	10	20	3	10	0,050
554282	CPI 16-400-8	16	400	8,5	17,5	10	20	3	10	0,062
554286	CPI 16-600-8	16	600	8,5	17,5	10	20	3	10	0,087
554299	CPI 25-150-10	25	150	10,5	26,5	15	30	3,5	10	0,058
554300	CPI 25-200-10	25	200	10,5	26,5	15	30	3,5	10	0,068
554301	CPI 25-250-10	25	250	10,5	26,5	15	30	3,5	10	0,078
554302	CPI 25-300-10	25	300	10,5	26,5	15	30	3,5	10	0,088
554304	CPI 25-400-10	25	400	10,5	26,5	15	30	3,5	10	0,108
554308	CPI 25-600-10	25	600	10,5	26,5	15	30	3,5	10	0,147
554321	CPI 35-150-12	35	150	13	26,5	15	30	4	10	0,071
554322	CPI 35-200-12	35	200	13	26,5	15	30	4	10	0,085
554323	CPI 35-250-12	35	250	13	26,5	15	30	4	10	0,099
554324	CPI 35-300-12	35	300	13	26,5	15	30	4	10	0,112
554326	CPI 35-400-12	35	400	13	26,5	15	30	4	10	0,140
554330	CPI 35-600-12	35	600	13	26,5	15	30	4	10	0,195
554343	CPI 50-150-12	50	150	13	30	15	30	5	10	0,111
554344	CPI 50-200-12	50	200	13	30	15	30	5	10	0,130
554345	CPI 50-250-12	50	250	13	30	15	30	5	10	0,150
554346	CPI 50-300-12	50	300	13	30	15	30	5	10	0,170
554348	CPI 50-400-12	50	400	13	30	15	30	5	10	0,209
554352	CPI 50-600-12	50	600	13	30	15	30	5	10	0,288
554365	CPI 70-150-12	70	150	13	30	15	30	5,8	10	0,139
554366	CPI 70-200-12	70	200	13	30	15	30	5,8	10	0,167
554367	CPI 70-250-12	70	250	13	30	15	30	5,8	10	0,194
554368	CPI 70-300-12	70	300	13	30	15	30	5,8	10	0,222
554370	CPI 70-400-12	70	400	13	30	15	30	5,8	10	0,277
554374	CPI 70-600-12	70	600	13	30	15	30	5,8	10	0,388
554378	CPI 70-800-12	70	800	13	30	15	30	5,8	10	0,498
554384	CPI 70-1100-12	70	1100	13	30	15	30	5,8	10	0,664

Grounding and Bonding Braid, CPIW Stainless Steel for Large Bolts



High-quality CPIW stainless steel grounding and bonding braids can be installed in corrosive environments like offshore applications or coastal applications. The full range of CPIW braids are ideal for applications using stainless steel pipe or tanks, like the food and beverage industry, building industry, transportation or oil and chemical industry.

nVent ERIFLEX offers 316L stainless steel braids, one of the highest resistant stainless steel options on the market. Our proprietary manufacturing process has been optimized to provide the best braiding, welding and connection palm.




CPIW FEATURES

- Superior abrasion, corrosion, chemical and UV resistance make CPIW braids ideal for outdoor applications
- Covering from M20 (3/4"-10) up to M42 (1 1/2"-6) bolt fixation point
- Great for expansion joints where constant movement requires a flexible and durable solution
- Ready to use out of the box, eliminates the need for cutting, stripping, crimping and punching
- Quick and easy to install
- Resistant to vibration and fatigue, reducing maintenance
- Will not rust or discolor, so the appearance will never fade or change
- Excellent electrical contact
- No additional lugs or terminals needed
- Non-magnetic material
- Recommended by the EMC/EMI directives
- Performs to the class C5 (very high) category as per ISO 12944-2
- EAC compliant
- RoHS compliant

CPIW GROUNDING AND BONDING BRAID SPECIFICATIONS

- Material: Stainless Steel 316L (EN 1.4404)
- Certification details: UL 467
- Complies with: IEC 61439-1

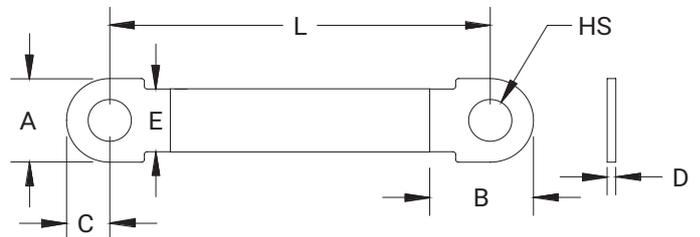

CPIW GROUNDING AND BONDING BRAID, TECHNICAL CHARACTERISTICS



Part No.	Article No.	Cross Section mm ²	L mm	HS mm	A mm	B mm	C mm	D mm	E mm	Unit Weight kg	Minimum Order Quantity
CPIW50-200-20B	554386B	50	200	21	42	51	21	3	30	0.128	50
CPIW50-200-24B	554401B	50	200	25	52	62	26	3	30	0.154	50
CPIW50-250-20B	554398B	50	250	21	42	51	21	3	30	0.148	50
CPIW50-250-24B	554403B	50	250	25	52	62	26	3	30	0.176	50
CPIW50-250-27B	554405B	50	250	28	58	69	29	3	30	0.195	50
CPIW50-250-30B	554407B	50	250	31	62	74	31	3	30	0.207	50
CPIW50-300-20B	554427B	50	300	21	42	51	21	3	30	0.200	50
CPIW50-300-24B	554428B	50	300	25	52	62	26	3	30	0.210	50
CPIW50-300-27B	554429B	50	300	28	58	69	29	3	30	0.220	50
CPIW50-300-30B	554409B	50	300	31	62	74	31	3	30	0.229	50
CPIW50-300-33B	554412B	50	300	34	68	78	34	3	30	0.246	50
CPIW50-300-39B	554416B	50	300	40	78	89	39	3	30	0.284	50
CPIW50-300-42B	554421B	50	300	43	82	94	41	3	30	0.301	50
CPIW50-400-33B	554414B	50	400	34	68	78	34	3	30	0.288	50
CPIW50-400-39B	554418B	50	400	40	78	89	39	3	30	0.327	50
CPIW50-400-42B	554423B	50	400	43	82	94	41	3	30	0.344	50
CPIW70-200-20B	554397B	70	200	21	42	51	21	3	30	0.149	50
CPIW70-200-24B	554402B	70	200	25	52	62	26	3	30	0.175	50
CPIW70-250-20B	554399B	70	250	21	42	51	21	3	30	0.178	50
CPIW70-250-24B	554404B	70	250	25	52	62	26	3	30	0.203	50
CPIW70-250-27B	554406B	70	250	28	58	69	29	3	30	0.221	50
CPIW70-250-30B	554408B	70	250	31	62	74	31	3	30	0.233	50
CPIW70-300-30B	554411B	70	300	31	62	74	31	3	30	0.262	50
CPIW70-300-33B	554413B	70	300	34	68	78	34	3	30	0.278	50
CPIW70-300-39B	554417B	70	300	40	78	89	39	3	30	0.315	50
CPIW70-300-42B	554422B	70	300	43	82	94	41	3	30	0.331	50
CPIW70-400-20B	554388B	70	400	21	42	51	21	3	30	0.264	50
CPIW70-400-33B	554415B	70	400	34	68	78	34	3	30	0.336	50
CPIW70-400-39B	554419B	70	400	40	78	89	39	3	30	0.373	50
CPIW70-400-42B	554424B	70	400	43	82	94	41	3	30	0.389	50


Power Shunt (PBC)



- High flexibility
- Reduce vibrations
- Ideal for transformer-busduct link
- Intensity: Up to 4600 A



PBC FEATURES

- Undrilled palms to customer's specific designs, fitted by power press
- Extra-flexible power connections (expansion rings, busbar...)
- Tinned electrolytic copper strand \varnothing 0,15 mm
- When used in parallel, the 2 shunts must be spaced with a minimum distance equal to the thickness of the shunt to allow air cooling

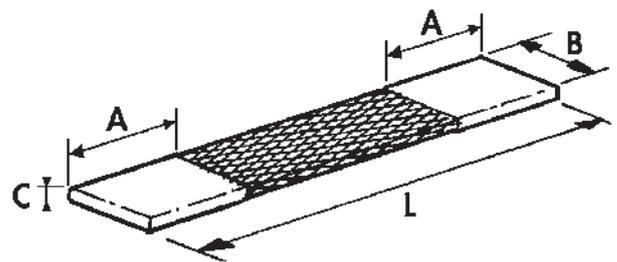

Part No.	Description	Section mm ²	Intensity (ΔT 30K)		Intensity (ΔT 50K)		A mm	B mm	C mm	L mm	Kg	Kg
564000	PBC 100 x 250	100	349	600	462	795	35	40	7,0	250	2	0,38
564050	PBC 100 x 500	100	349	600	462	795	35	40	7,0	500	2	0,63
564010	PBC 120 x 250	120	385	670	511	877	35	40	7,5	250	2	0,42
564100	PBC 150 x 250	150	440	757	583	1003	55	50	8,0	250	2	0,63
564150	PBC 150 x 500	150	440	757	583	1003	55	50	8,0	500	2	0,90
564200	PBC 200 x 250	200	550	946	729	1253	55	50	9,0	250	2	0,76
564250	PBC 200 x 500	200	550	946	729	1253	55	50	9,0	500	2	1,20
564300	PBC 250 x 300	250	651	1120	863	1484	85	50	10,5	300	2	1,03
564400	PBC 300 x 400	300	716	1180	948	1565	85	60	11,0	400	1	1,53
564500	PBC 400 x 400	400	853	1360	1131	1808	85	80	11,0	400	1	2,20
564600	PBC 500 x 400	500	917	1561	1216	1944	105	100	11,0	400	1	2,64
564700	PBC 600 x 450	600	1101	1762	1459	2334	105	100	13,0	450	1	3,40
564800	PBC 800 x 450	800	1376	2202	1823	2917	105	100	14,0	450	1	4,26
564900	PBC 1000 x 450	1000	1651	2642	2188	3500	105	100	16,0	450	1	5,47
564030	PBC 1200 x 500	1200	1982	3170	2626	4208	125	120	17,5	500	1	7,16

Presswelded Power Shunts (PPS)

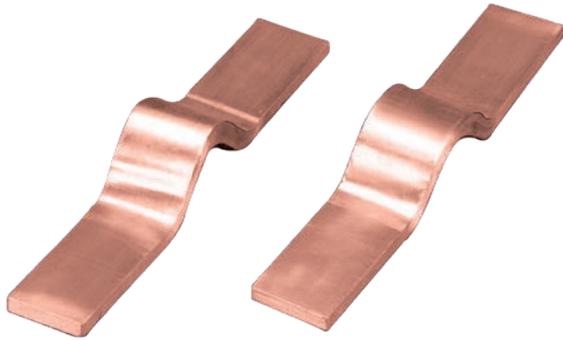

PPS FEATURES

Press welding is welding of laminations to each other through direct current applied to pieces under pressure.

This technique results in:

- The formation of a solid palm with properties of plain bar
- Smaller cross section for same capacity
- Runs cooler than equal section
- Plain copper, thickness of laminations 0,2 mm
- When used in parallel, the 2 shunts must be spaced with a minimum distance equal to the thickness of the shunt

Part No.	Description	Section mm ²	Intensity (ΔT 30K)		Intensity (ΔT 50K)		A mm	B mm	C mm	L mm	H mm	Kg
			↙	↘	↙	↘						
566030	PPS 50/10/80-280	500	1022	1758	1354	2329	80	50	10	280	58	1,440
566040	PPS 80/10/100-320	800	1511	2493	2002	3303	100	80	10	320	52	2,625
566050	PPS 100/10/100-300	1000	1825	2920	2418	3869	100	100	10	300	54	3,065
566060	PPS 100/10/110-360	1000	1825	2920	2418	3869	110	100	10	360	53	3,610
566070	PPS 100/15/110-360	1500	2178	3485	2886	4617	110	100	15	360	57	5,385


CUSTOM SOLUTIONS

nVent ERIFLEX can provide made-to-order, custom configurations to your drawing specifications.

nVent ERIFLEX copper braids can be made to custom lengths, widths, thicknesses and hole patterns; with PVC installation; in flat or tubular shapes; using copper wire; in continuous coils; or with soldered studs or crimped lugs. Let nVent ERIFLEX solve your design and production scheduling challenges.



Flat Copper & Stainless Steel Braids (FTCB, FRCB, FSSB & FTCBI)

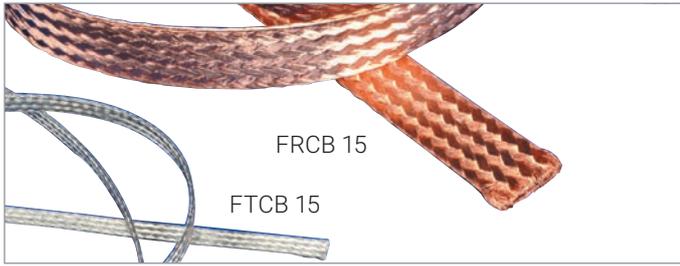

FTCB 15 FLAT TINNED COPPER BRAIDS




- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A			Kg
557200	FTCB 15-3	3	5x1	168	30	25 m		0,03
557210	FTCB 15-5	5	8x1	288	45	25 m		0,05
557220	FTCB 15-8	8	8x1,5	456	65	25 m		0,08
557230	FTCB 15-10	10	10x1,5	576	75	25 m		0,10
557240	FTCB 15-16	16	15x1,5	896	120	25 m		0,16
557250	FTCB 15-20	20	20x1,5	1120	140	25 m		0,20
557260	FTCB 15-25	25	23x1,5	1404	150	25 m		0,25
557270	FTCB 15-30	30	23x2,0	1692	180	25 m		0,30
557280	FTCB 15-35	35	23x2,5	1980	200	25 m		0,35
557290	FTCB 15-40	40	25x2,5	2272	220	25 m		0,40
557300	FTCB 15-50	50	28x3	2848	250	25 m		0,50
557310	FTCB 15-60	60	30x3	3392	280	25 m		0,60
557320	FTCB 15-70	70	30x3,5	3968	290	25 m		0,70
557330	FTCB 15-75	75	30x4	4256	300	25 m		0,75
557350	FTCB 15-100	100	40x4	5664	360	25 m		1,00

FRCB 15 FLAT PLAIN COPPER BRAIDS

- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A			Kg
557010	FRCB 15-5	5	8x1	288	45	25 m		0,05
557030	FRCB 15-10	10	10x1,5	576	75	25 m		0,10
557040	FRCB 15-16	16	15x1,5	896	120	25 m		0,16
557050	FRCB 15-20	20	20x1,5	1120	140	25 m		0,20
557060	FRCB 15-25	25	23x1,5	1404	150	25 m		0,25
557080	FRCB 15-35	35	23x2,5	1980	200	25 m		0,35
557090	FRCB 15-40	40	25x2,5	2272	220	25 m		0,40
557100	FRCB 15-50	50	28x3	2848	250	25 m		0,50
557120	FRCB 15-70	70	30x3,5	3968	290	25 m		0,70
557130	FRCB 15-75	75	30x4	4256	300	25 m		0,75
557150	FRCB 15-100	100	40x4	5664	360	25 m		1,00

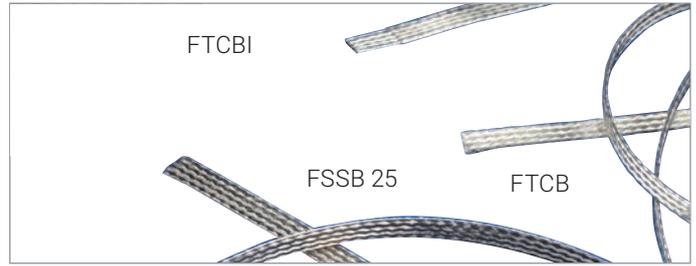

FTCBI INSULATED FLAT TINNED COPPER BRAIDS

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL 94-V0
- Standard wire diameter: 0,15 mm
- 25 m coils
- Insulation voltage: 450 V
- Working temperature: up to 70°C

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A			Kg
510300	FTCBI 16	16	17x3,5	896	120	25 m		0,18
510310	FTCBI 25	25	25x3,5	1404	150	25 m		0,29
510340	FTCBI 50	50	30x5	2848	250	25 m		0,60

FTCB 20 FLAT TINNED COPPER BRAIDS



- Standard wire diameter: 0,20 mm
- Extra long reels

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A			Kg
503510	FTCB 20-5	5	8x1	168	45	500 m		0,05
503520	FTCB 20-10	10	10x1,5	312	75	150 m		0,10
503530	FTCB 20-16	16	15x2	512	120	150 m		0,16
503540	FTCB 20-25	25	25x1,5	792	150	100 m		0,25

FSSB 25 STAINLESS STEEL FLAT BRAIDS




- Standard wire diameter: 0,25 mm
- Stainless steel 316L

Part No.	Description	Section mm ²	mm			Kg
557160	FSSB 25-16 ²	16	15x1,5	25 m		0,14
557170	FSSB 25-25 ²	25	23x1,5	25 m		0,22
557390	FSSB 25-50 ²	50	30x3	25 m		0,44

Round & Tubular Copper Braids (RTCB, RRCB, RRCT, TTCE)

- A large range of braids
- Bare or insulated

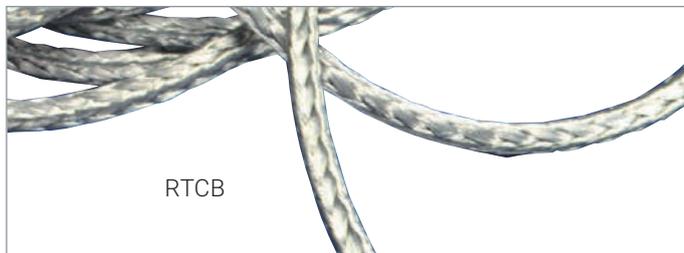

RTCB

- Tubulars for shielding
- Stainless steel for corrosive environment



RRCB

RTCB / RTCB HL TINNED COPPER ROUND BRAIDS




Part No.	Description	Section mm ²	External dia in mm	Number of Wire	Nominal Current A			Kg
557600	RTCB 15-6	6	4	352	45	25 m		0,06
557610	RTCB 15-8	8	4,5	464	65	25 m		0,08
557620	RTCB 15-10	10	5	560	75	25 m		0,10
557630	RTCB 15-16	16	6	900	120	25 m		0,16
557640	RTCB 15-25	25	8	1416	150	25 m		0,25
557650	RTCB 15-30	30	9	1680	180	25 m		0,30
557660	RTCB 15-50	50	11	2820	250	25 m		0,50
557670	RTCB 15-75	75	13,5	4236	300	25 m		0,75
557680	RTCB 15-100	100	17	5652	360	25 m		1,00
Standard wire diameter 0,15 mm - Extra long reels								
503700	RTCB 15-10/HL	10	5	560	75	100 m		0,100
503710	RTCB 15-16/HL	16	6	900	120	100 m		0,160
503720	RTCB 15-25/HL	25	7,5	1416	150	100 m		0,250

RRCB PLAIN COPPER ROUND BRAIDS

- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm ²	External dia in mm	Number of Wire	Nominal Current A			Kg
557400	RRCB 15-6	6	4	352	45	25 m		0,06
557420	RRCB 15-10	10	5	560	75	25 m		0,10
557430	RRCB 15-16	16	6	900	120	25 m		0,16
557440	RRCB 15-25	25	8	1416	150	25 m		0,25
557450	RRCB 15-30	30	9	1680	180	25 m		0,30
557460	RRCB 15-50	50	11	2820	250	25 m		0,50
557470	RRCB 15-75	75	14	4236	300	25 m		0,75
557480	RRCB 15-100	100	18	5652	360	25 m		1,00

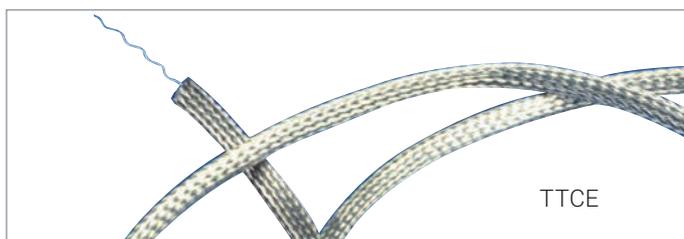

TTCE



TTCE TINNED COPPER TUBULAR BRAIDS

- For screening connecting cables between equipment used in an electromagnetically disturbed environment.
- Supplied with draw wire

The primary use of tubular braid is to provide sensitive cables with an EMC/EMI screen to shield them against electromagnetic, electrostatic and radio frequency interference. Optimum screening performance is obtained using copper wire braid that can also be used for earth continuity purposes.

Part No.	Description	Section mm ²	Int.	Diameter mm			Number of Wire	Ø wires mm	Nominal Current A			Kg
				Covering %	Exp.	Covering %						
510100	TTCE 3	1,7	3	100%	6	90%	96	0,15	13	50 m		0,020
510110	TTCE 5	2,5	5	99%	10	92%	144	0,15	19	50 m		0,026
510120	TTCE 8	4,45	8	99%	16	95%	252	0,15	37	50 m		0,050
510130	TTCE 10	5,7	10	100%	20	92%	320	0,15	43	50 m		0,054
510140	TTCE 15	12	15	100%	25	94%	334	0,15	90	50 m		0,120
510150	TTCE 20	20,4	20	99%	40	87%	288	0,30	122	50 m		0,190
510160	TTCE 25	27,1	25	99%	50	92%	384	0,30	163	25 m		0,270
510170	TTCE 30	33,9	30	100%	60	90%	480	0,30	185	25 m		0,320
510180	TTCE 35	40,7	35	100%	70	94%	576	0,30	244	25 m		0,380
Extra long reels												
504690	TTCE 8/HL	6,8	8	-	16	-	216	0,15	37	200 m		0,050

Round Copper Braids (RRCBI & RTCBI)

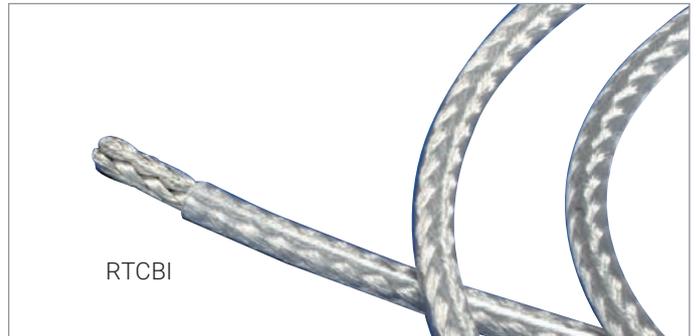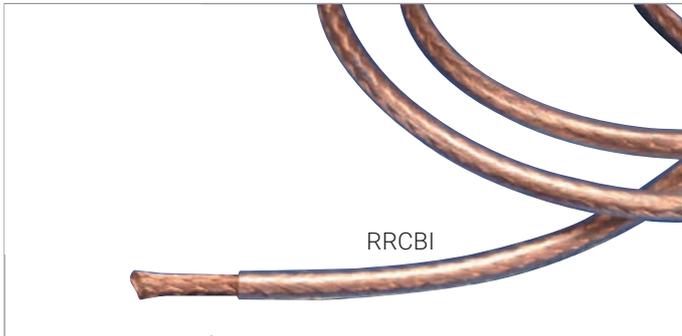

RRCBI INSULATED PLAIN COPPER ROUND BRAIDS

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL 94 - VO
- Standard wire diameter: 0,15 mm
- Insulation voltage: 450 V
- Working temperature: up to 70°C

RTCBI / RTCBI HL INSULATED ROUND TINNED COPPER BRAIDS

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL 94 - VO
- Standard wire diameter: 0,15 mm
- 25 m coils
- Insulation voltage: 450 V
- Working temperature: up to 70°C

Part No.	Description	Section mm ²	External dia in mm	Number of Wire	Nominal Current A	 25 m	 Kg
510500	RRCBI 15-10	10	7	560	75	25 m	0,10
510510	RRCBI 15-16	16	8	900	120	25 m	0,16


Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A	 25 m	 Kg
503400	RTCBI 15-10	10	7	560	75	25 m	0,12
503410	RTCBI 15-16	16	8	900	120	25 m	0,18
503420	RTCBI 15-25	25	9,5	1416	150	25 m	0,25
503430	RTCBI 15-30	30	10	1680	180	25 m	0,35
503440	RTCBI 15-50	50	12,5	2820	250	25 m	0,58

ON REQUEST SPECIAL MANUFACTURING:

- Tubular braids up to 60 mm diameter maximum
- Flat or round copper braids up to 400 mm² maximum
- Insulation 105° C



Make Your Own Braided Connections

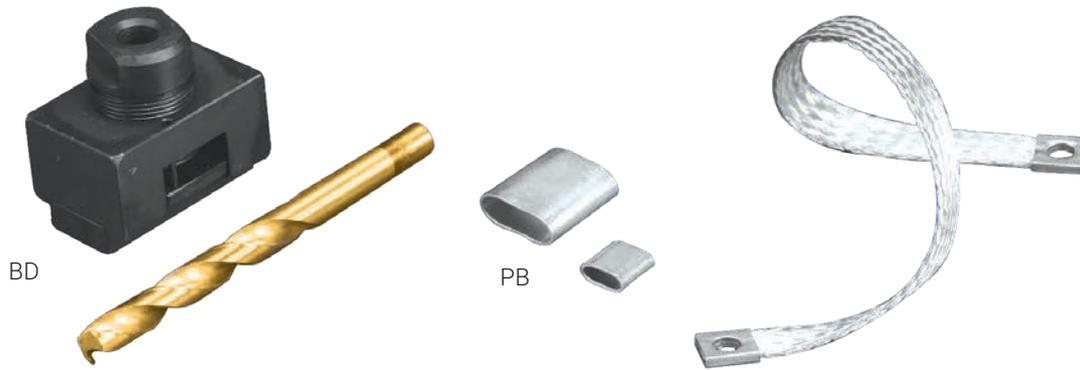

BD CRIMP AND DRILL TOOL

- This tool has been developed by nVent ERIFLEX specifically for crimping and drilling of braid terminals. Guide and specially adapted drill bit included.

Part No.	Description	For Flat	∅ Drill Bit	Bolt		 Kg
558610	BD 16	FTCB or FRCB 15-16	6,5	M6	1	0,653
558640	BD 16-8,5	FTCB or FRCB 15-16	8,5	M8	1	0,653
558620	BD 25	FTCB or FRCB 15-25	11	M10	1	0,678
558630	BD 50	FTCB or FRCB 15-50	12,5	M126	1	0,712


HCT 3-4 CRIMPING TOOL FOR HYDRAULIC WORK CENTER

- This package allows to crimp lugs PB16, PB25 and PB50 on braids with the hydraulic nVent ERIFLEX Puncher.

Part No.	Description		 Kg
545980	HCT 3-4	1	1,850

PB LUGS FOR FLAT BRAIDS (FTCB OR FCRB)

- In tinned annealed copper







Part No.	Description	For Flat	A	B	e		 Kg
557180	PB 16	FTCB or FRCB 15-16	16	15	1	100	0,004
557190	PB 25	FTCB or FRCB 15-25	22	25	1	100	0,010
557380	PB 50	FTCB or FRCB 15-50	30	30	1	100	0,017

ABOUT ELECTROMAGNETIC COMPATIBILITY...

In an environment where electromagnetic disturbances are more and more numerous, the ElectroMagnetic Compatibility (EMC) is increasingly important in the design and building of electrical panels.

In order to avoid stray currents, it is necessary that all the metallic framework, inside the panel or outside, is at the same electrical potential. Thus, it is essential to link all these metal parts with connections presenting a low impedance at High Frequency (H.F.).


Connections with cables are not efficient. Only short and flat conductors are. Their H.F. impedances are 10 times lower than the wire impedances.



Made to Order Solutions (MTO)


FLEXIBAR CUSTOM SOLUTIONS (MADE TO ORDER)

nVent ERIFLEX can provide preformed Flexibar configurations to your drawing specifications. Flexibar can be cut, punched, twisted or bent to address your most challenging panelboard designs and production scheduling requirements. Give nVent ERIFLEX your low voltage connection challenges!

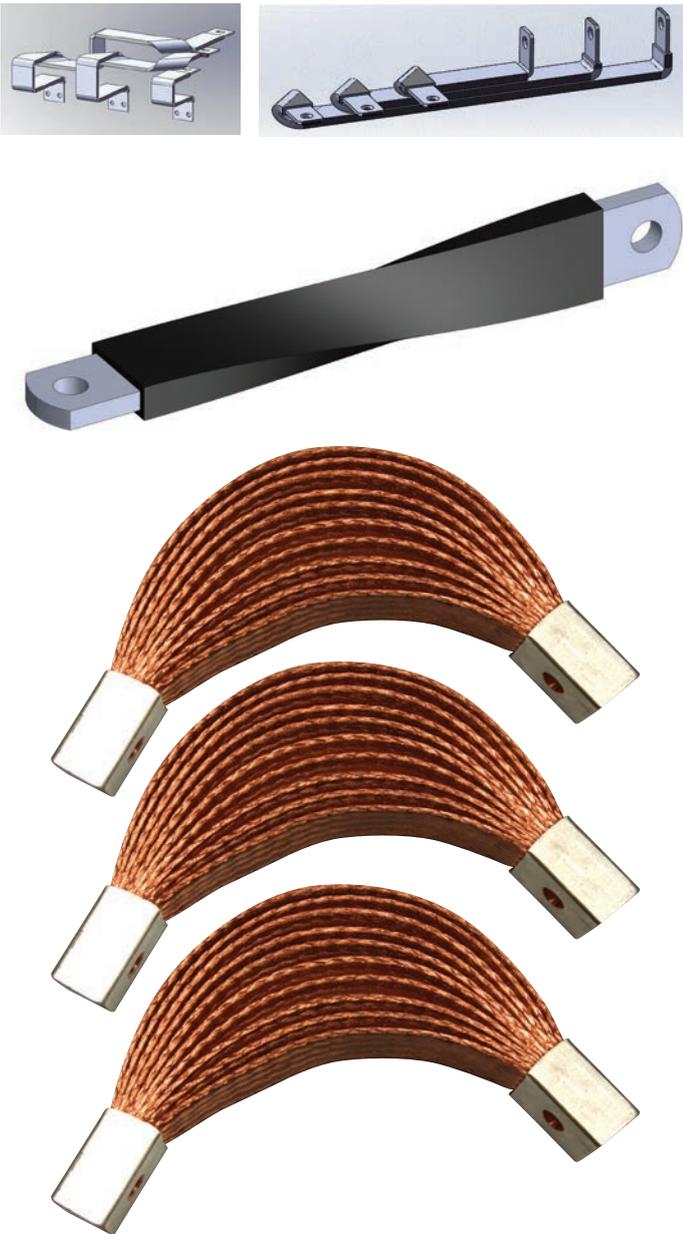

BRAIDED CONDUCTORS CUSTOM SOLUTIONS (MADE TO ORDER)

nVent ERIFLEX brand of copper braids can be made to custom lengths, widths, thicknesses and hole patterns; with PVC or TPE (Advanced) insulation; in flat or tubular shapes; using copper or stainless steel wire; in continuous coils; or with soldered studs or crimped lugs. Let nVent ERIFLEX solve your design and production scheduling challenges.

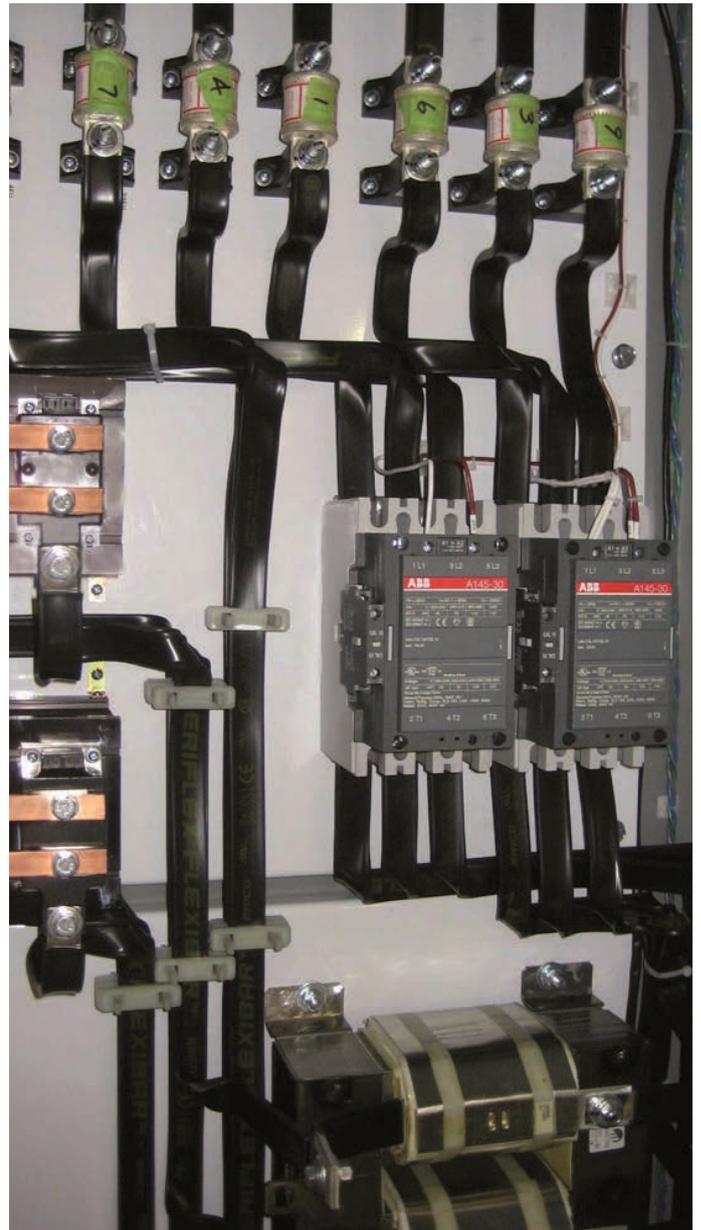

Made to Order Solutions

CUSTOM SOLUTIONS (MADE TO ORDER) - CHECK LIST

Summary of the information we need for custom design work. Please photocopy this page and complete it by providing the information you know and sending to your local nVent ERIFLEX customer service representative. (Sections can be left blank)

Electrical Function:

Earthing/grounding conductor.....
 Power conductor.....
 Nominal current.....__A
 Alternating or direct current.....__
 Nominal voltage.....__V
 Insulation specification (if require).....

Material:


Red/plain copper.....
 Tinned copper.....
 Stainless steel.....
 Aluminum.....
 Other.....

Environment:

Ambient temperature.....__C°
 Operating temperature.....__C°
 Conductor maximum temperature.....__C°
 Humidity (dry/average/moist).....%HR

EXTREMITY/TERMINAL DIMENSIONS:


Indicate your dimensions on the proposed terminal drawing or make a sketch showing your needs.

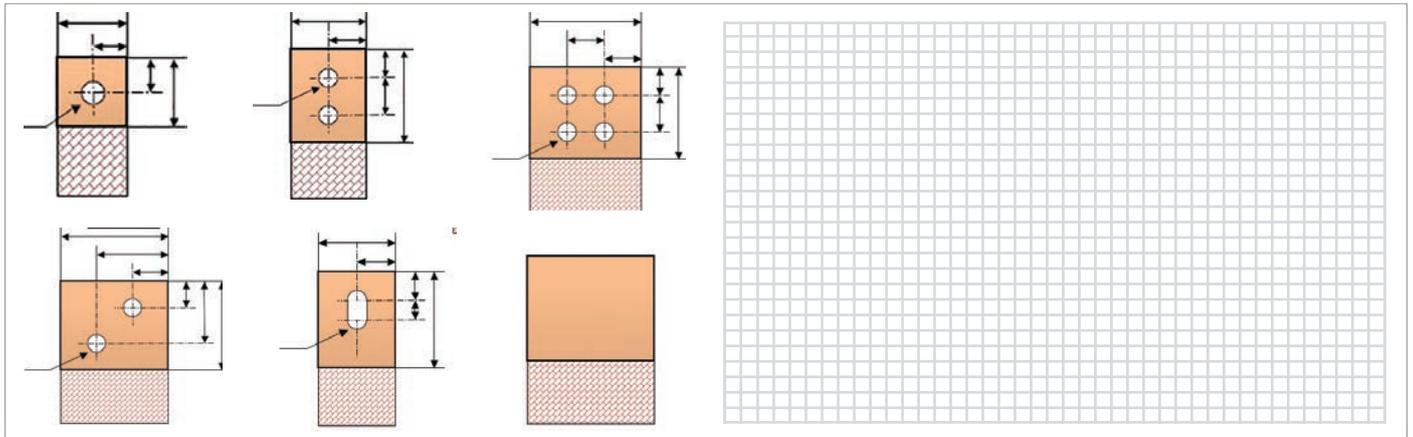

The image shows six technical drawings of terminal cross-sections. The first three drawings show rectangular terminals with one, two, and three circular holes respectively. The last three drawings show rectangular terminals with one circular hole, one oval hole, and a solid rectangular terminal. To the right of these drawings is a large grid for sketching dimensions.

Conductor Dimensions:
 Availability: Drawing Specification Samples

 Cross Section _____ mm²
 Flat or Round Section _____
 Width of the Conductor _____ mm
 Thickness of the Conductor _____ mm
 Length of the Conductor _____ mm
 Quantity _____

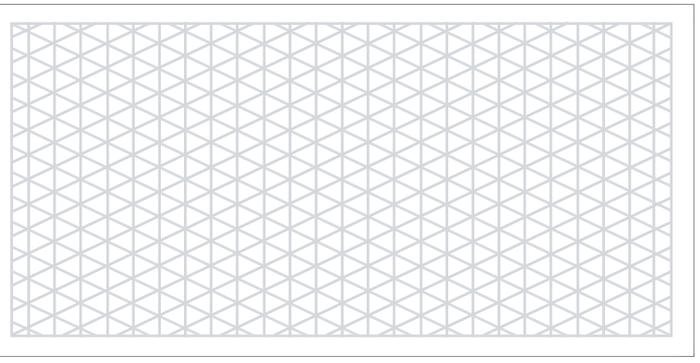

The image shows a grid for sketching conductor dimensions, with a diamond-shaped pattern.

Contact/Requested by:

Company _____
 Contact Name _____
 Phone Number _____

E-mail address _____
 Address (City & Country) _____

Cross Reference List

Part Number	Page	Part Number	Page	Part Number	Page
503400	51	534017	15	534049*	15
503410	51	534018	13	534050	13
503420	51	534018	15	534050*	15
503430	51	534019	13	534051	13
503440	51	534019*	15	534051*	15
503510	49	534020	13	534052	13
503520	49	534020*	15	534052*	15
503530	49	534021	13	534053	13
503540	49	534021*	15	534053*	15
503700	50	534022	13	534055	13
503710	50	534022*	15	534055*	15
503720	50	534023	13	534056	13
504690	50	534023	15	534056*	15
510100	50	534024	13	534057	13
510110	50	534024	15	534057*	15
510120	50	534025	13	534058	13
510130	50	534025	15	534058*	15
510140	50	534026	13	534059	13
510150	50	534026*	15	534059*	15
510160	50	534027	13	534060	13
510170	50	534027*	15	534060*	15
510180	50	534028	13	534400	31
510300	49	534028*	15	534401	31
510310	49	534029	13	534402	31
510340	49	534029*	15	534403	31
510500	51	534030	13	534404	31
510510	51	534030	15	534405	31
534000	13	534031	13	534406	31
534000	15	534031	15	534407	31
534001	13	534032	13	534408	31
534001	15	534032	15	534409	31
534002	13	534033	13	534410	31
534002	15	534033*	15	534411	31
534003	13	534034	13	534412	31
534003	15	534034*	15	534413	31
534004	13	534035	13	534414	31
534004	15	534035*	15	534415	31
534005	13	534036	13	534416	31
534005	15	534036*	15	534417	31
534006	13	534037	13	534418	31
534006	15	534037	15	534419	31
534007	13	534038	13	534420	31
534007	15	534038*	15	534421	31
534008	13	534039	13	534422	31
534008	15	534039*	15	534423	31
534009	13	534040	13	534424	31
534009	15	534040*	15	534425	31
534010	13	534041	13	534426	31
534010	15	534041*	15	534427	31
534011	13	534042	13	534428	31
534011	15	534042*	15	534429	31
534012	13	534044	13	534430	31
534012	15	534044*	15	534431	31
534013	13	534045	13	534432	31
534013*	15	534045*	15	534433	31
534014	13	534046	13	534434	31
534014*	15	534046*	15	534435	31
534015	13	534047	13	534436	31
534015*	15	534047*	15	534437	31
534016	13	534048	13	534438	31
534016	15	534048*	15	534439	31
534017	13	534049	13	534440	31

Cross Reference List

Part Number	Page	Part Number	Page	Part Number	Page
534441	31	541800	22	552670*	19
534442	31	541805	22	552680	17
534443	31	541810	22	552680*	19
534444	31	541815	22	552690	17
534445	31	545980	52	552690	19
534446	31	552390	17	552700	17
534500	31	552390	19	552700	19
534501	31	552400	17	552710	17
534502	31	552400	19	552710	19
534503	31	552410	17	552720	17
534504	31	552410	19	552720*	19
534505	31	552420	17	552730	17
534506	31	552420	19	552730*	19
534507	31	552430	17	552740	17
534508	31	552430	19	552740*	19
534509	31	552440	17	552750	17
534510	31	552440	19	552750*	19
534511	31	552450	17	552760	17
534512	31	552450	19	552760	19
534513	31	552460	17	552770	17
534514	35	552460	19	552770*	19
534515	35	552470	17	552780	17
534516	35	552470	19	552780*	19
534517	35	552480	17	552790	17
534518	35	552480	19	552790*	19
534519	35	552490	17	552800	17
534520	35	552490	19	552800*	19
534521	35	552500	17	552810	17
534522	35	552500	19	552810*	19
534523	35	552510	17	552830	17
534524	35	552510	19	552830*	19
534525	35	552520	17	552840	17
534526	35	552520*	19	552840*	19
534527	35	552530	17	552850	17
534528	35	552530*	19	552850*	19
534529	35	552540	17	552860	17
534530	35	552540*	19	552860*	19
534531	35	552550	17	552870	17
534800	22	552550	19	552870*	19
534805	22	552560	17	552890	17
534810	22	552560	19	552890*	19
534815	22	552570	17	552900	17
538650	17	552570	19	552900*	19
538650*	19	552580	17	552910	17
541060	19	552580*	19	552910*	19
541090	19	552590	17	552920	17
541100	19	552590*	19	552920*	19
541110	19	552600	17	552930	17
541150	19	552600*	19	552930*	19
541160	19	552610	17	552950	17
541170	19	552610*	19	552950*	19
541180*	19	552620	17	552960	17
541230	19	552620	19	552960*	19
541240	19	552630	17	552970	17
541250*	19	552630	19	552970*	19
541260*	19	552640	17	552980	17
541270*	19	552640	19	552980*	19
541320*	19	552650	17	552990	17
541380*	19	552650*	19	552990*	19
541774	22	552660	17	553020	24
541775	22	552660*	19	553030	24
541776	22	552670	17	553040	24

Cross Reference List

Part Number	Page	Part Number	Page	Part Number	Page
553050	24	554384	44	556920	39
553060	24	554386B	46	556930	40
553070	24	554388B	46	556940	40
553100	24	554397B	46	556950	40
553110	24	554398B	46	556960	40
553120	24	554399B	46	556970	40
553200	24	554401B	46	556980	40
553210	24	554402B	46	557010	49
553220	24	554403B	46	557030	49
553230	24	554404B	46	557040	49
553250	24	554405B	46	557050	49
553260	24	554406B	46	557060	49
553370	23	554407B	46	557080	49
553380	23	554408B	46	557090	49
553400	25	554409B	46	557100	49
553405	25	554411B	46	557120	49
553410	25	554412B	46	557130	49
553430	25	554413B	46	557150	49
553440	25	554414B	46	557160	49
553505	25	554415B	46	557170	49
553510	25	554416B	46	557180	52
553520	25	554417B	46	557190	52
553530	25	554418B	46	557200	49
553540	25	554419B	46	557210	49
553550	23	554421B	46	557220	49
553550	38	554422B	46	557230	49
553560	23	554423B	46	557240	49
553560	38	554424B	46	557250	49
553570	23	554427B	46	557260	49
553580	23	554428B	46	557270	49
553590	23	554429B	46	557280	49
554277	44	555200	40	557290	49
554278	44	555201	40	557300	49
554279	44	556600	40	557310	49
554280	44	556610	40	557320	49
554282	44	556620	40	557330	49
554286	44	556630	40	557350	49
554299	44	556640	40	557380	52
554300	44	556650	40	557390	49
554301	44	556660	40	557400	50
554302	44	556670	40	557420	50
554304	44	556680	40	557430	50
554308	44	556690	40	557440	50
554321	44	556700	40	557450	50
554322	44	556710	40	557460	50
554323	44	556720	40	557470	50
554324	44	556730	40	557480	50
554326	44	556740	40	557600	50
554330	44	556750	40	557610	50
554343	44	556760	40	557620	50
554344	44	556770	40	557630	50
554345	44	556780	40	557640	50
554346	44	556790	40	557650	50
554348	44	556800	40	557660	50
554352	44	556810	40	557670	50
554365	44	556820	40	557680	50
554366	44	556830	40	558310	25
554367	44	556840	40	558340	25
554368	44	556850	40	558370	25
554370	44	556860	40	558410	25
554374	44	556900	39	558440	25
554378	44	556910	39	558460	25

Cross Reference List

Part Number	Page	Part Number	Page
558480	25	563622	42
558490	25	564000	47
558584	37	564010	47
558586	37	564030	47
558587	37	564050	47
558588	37	564100	47
558589	37	564150	47
558591	37	564200	47
558592	37	564250	47
558593	37	564300	47
558594	37	564400	47
558595	37	564500	47
558610	52	564600	47
558620	52	564700	47
558630	52	564800	47
558640	52	564900	47
561210	25	565000	40
561220	25	566030	48
563300	40	566040	48
563320	40	566050	48
563340	40	566060	48
563350	40	566070	48
563360	40	566490	21
563370	40	566500	21
563380	40	566510	21
563390	40	566520	21
563400	40	566550	21
563410	40	566560	21
563420	40	566570	21
563430	40	566580	21
563440	40	566590	21
563450	40	566630	21
563460	40	566640	21
563470	40	566650	21
563480	40	566660	21
563490	40	566670	21
563500	40	566720	21
563510	40	566730	21
563520	40	566750	21
563530	40	566780	21
563540	40	566800	21
563550	40	566810	21
563560	40	567880	25
563601	42	568700	24
563602	42	568730	24
563603	42		
563604	42		
563605	42		
563606	42		
563607	42		
563608	42		
563609	42		
563611	42		
563612	42		
563613	42		
563614	42		
563615	42		
563616	42		
563617	42		
563618	42		
563619	42		
563621	42		

OTHER LITTERATURE


DISTRIBUTION BLOCKS, POWER BLOCKS AND DISTRIBUTION TERMINAL



HYDRAULIC & MANUAL TOOLS



SOLUTIONS FOR ELECTRICAL POWER & EARTH CONNECTIONS



READY-TO-USE POWER CONDUCTOR: IBS & IBSB ADVANCED TECHNICAL GUIDE



NVENT ERIFLEX FLEXIBAR TECHNICAL HANDBOOK



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER



nVent.com/ERIFLEX