

This drawing is property of ELETTROMECCANICA PIOSSASCO SRL; reproduction, use or disclosure to third parties without express authority is strictly forbidden.




ELETTROMECCANICA
PIOSSASCO
s.r.l.



OIL FILLED TRANSFORMER HERMETICALLY SEALED TYPE EXECUTION

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =


Mod. DRW OIL
Ed. apr. 2010
Pag. 1 di 1

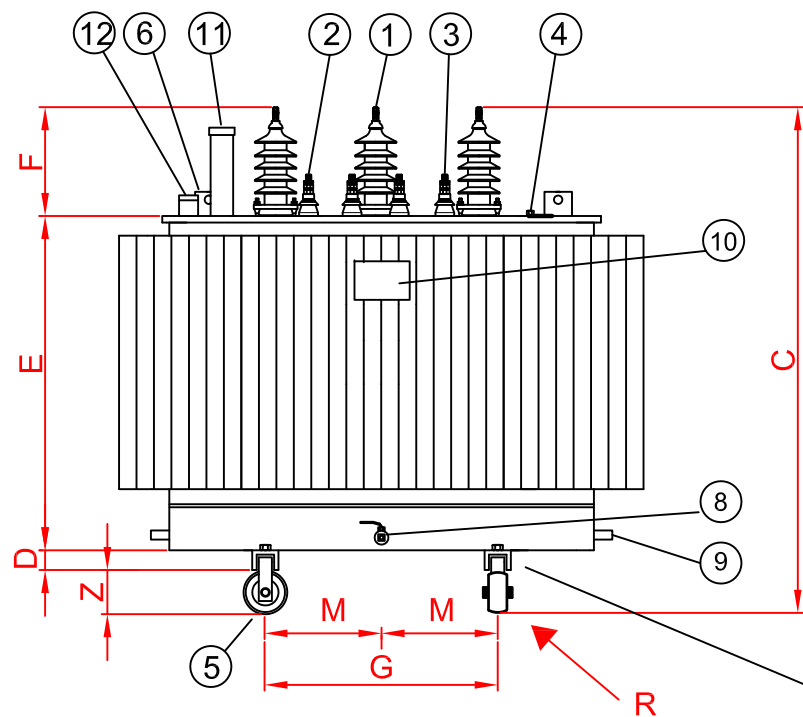


terminal LV and neutral



terminal HV

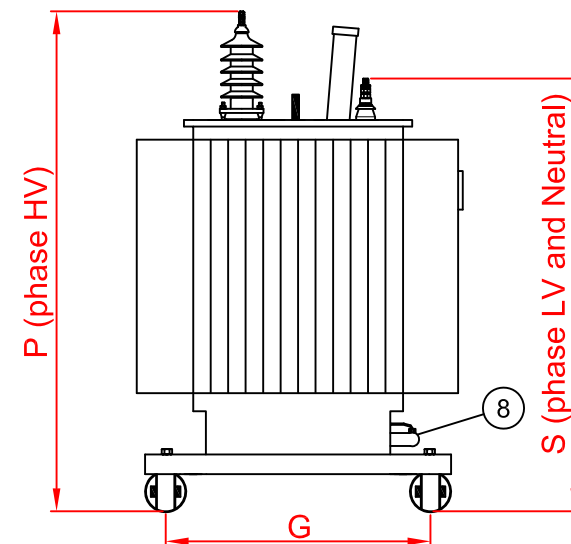

DRAWING NOT IN SCALE
TOLERANCE DIMENSIONS : 2%

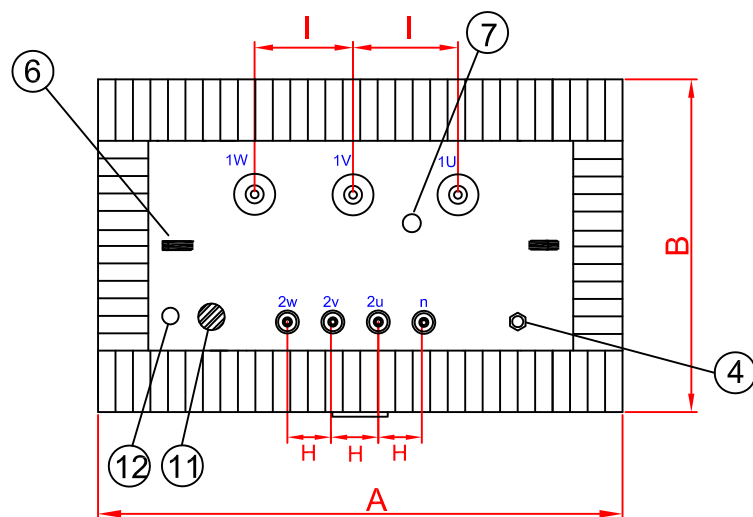

A	1280
B	760
C	1610
D	50
Z	120
E	1010
F	430
G	670
M	335
H	120
I	280
S	1340
P	1610
R	Ø 125 x 40

Pos.	Description	RATED POWER : kVA 400 aluminum windings
1	BUSHING HV - porcelain type	Type : ONAN Series : ECO-O (EU548)
2	BUSHING LV - porcelain type	kV primary : 10 +/- 2 x 2,5%
3	NEUTRAL BUSHING - porcelain type	V secondary : 400 + n. (at no load)
4	THERMOMETER POCKET	Hz 50 Vcc 4% Group: Dyn11
5	ROLLERS	TOTAL WEIGHT : 1700 Kg.
6	LIFTING LUGS	OIL WEIGHT : 430 Kg.
7	TAP-CHANGER at 5 steps (+/- 2 x 2,5%)	Customer: VECTOR
8	DRAIN VALVE	☒ request dt 05/06/20
9	EARTING TERMINAL	☒
10	DATA PLATE	date : 05/06/2020
11	BURSTING VALVE	preliminary drawing
12	OIL LEVEL lenticular type (optional)	
NOTE: color RAL 7031		