







solution with HV terminal PORCELAIN type  
for kV 10

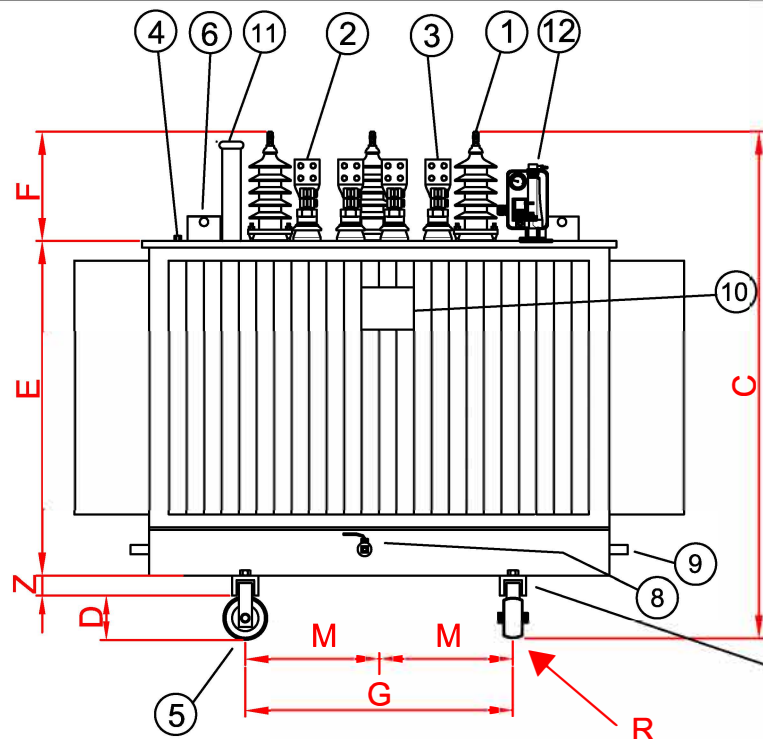


screen terminal



terminal LV and NEUTRAL (1/2000 A)

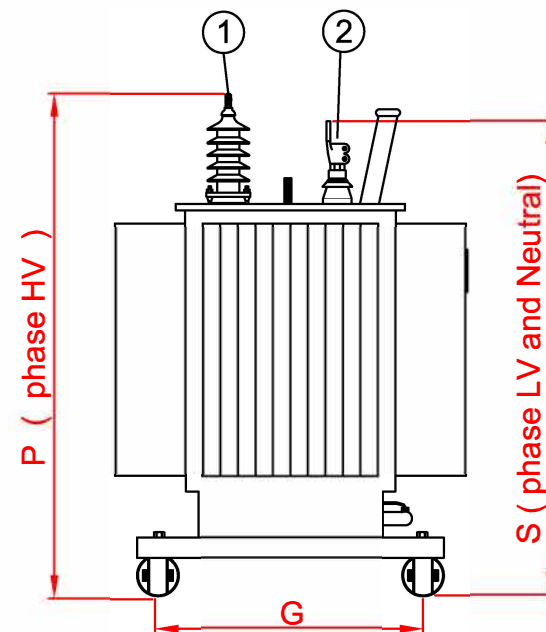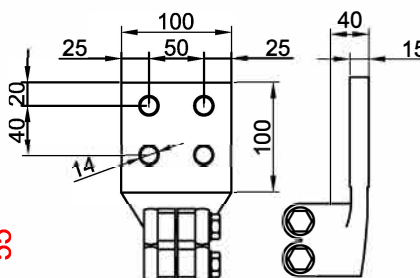

DRAWING NOT IN SCALE  
TOLLERENCE DIMENSIONS : 2%

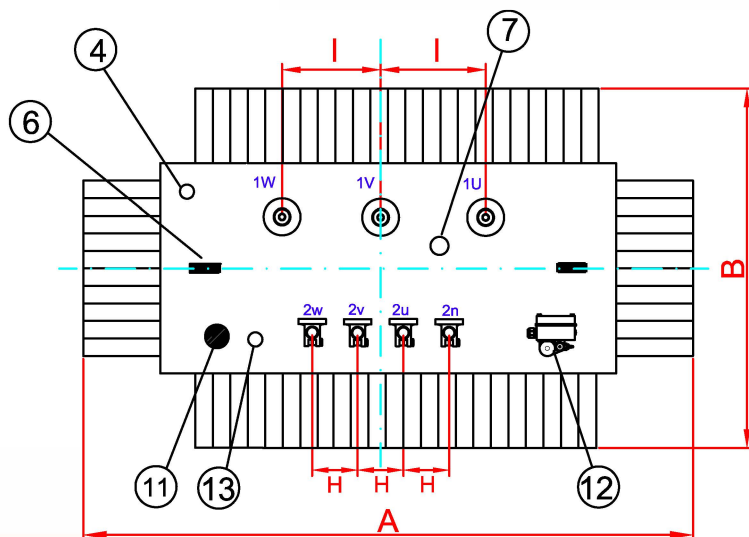

|   |            |
|---|------------|
| A | 1610       |
| B | 1010       |
| C | 1890       |
| Z | 55         |
| D | 145        |
| E | 1240       |
| F | 450        |
| G | 820        |
| M | 410        |
| H | 180        |
| I | 280        |
| S | 1750       |
| P | 1870       |
| R | Ø 160 x 50 |

**NOTE:**

| Pos. | Description                           |
|------|---------------------------------------|
| 1    | BUSHING HV - porcelain type           |
| 2    | BUSHING LV - porcelain type           |
| 3    | BUSHING NEUTRAL - porcelain type      |
| 4    | THERMOMETER POCKET                    |
| 5    | ROLLERS                               |
| 6    | LIFTING LUGS                          |
| 7    | TAP-CHANGER at 5 steps (+/- 2 x 2,5%) |
| 8    | DRAIN VALVE                           |
| 9    | EARTING TERMINAL                      |
| 10   | DATA PLATE                            |
| 11   | BURSTING VALVE                        |
| 12   | DMCR protection device                |
| 13   | ELECTROSTATIC SCREEN TERMINAL         |

|                                                       |
|-------------------------------------------------------|
| Rated Power : kVA 1000<br>aluminum windings execution |
| Type : ONAN Series : ECO-O                            |
| kV primary : 10 +/- 2 x 2,5%                          |
| V secondary : 400 + n. (at no load)                   |
| Hz 50 Vcc 6% Group: Dyn11                             |
| TOTAL WEIGHT : 2900 Kg.                               |
| OIL WEIGHT : 700 Kg.                                  |
| Customer: VECTOR                                      |

color RAL 7031

executive drawing